



LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
			BA1	REVISED PER ECO-11-005150	28MAR2011	RK	HMR

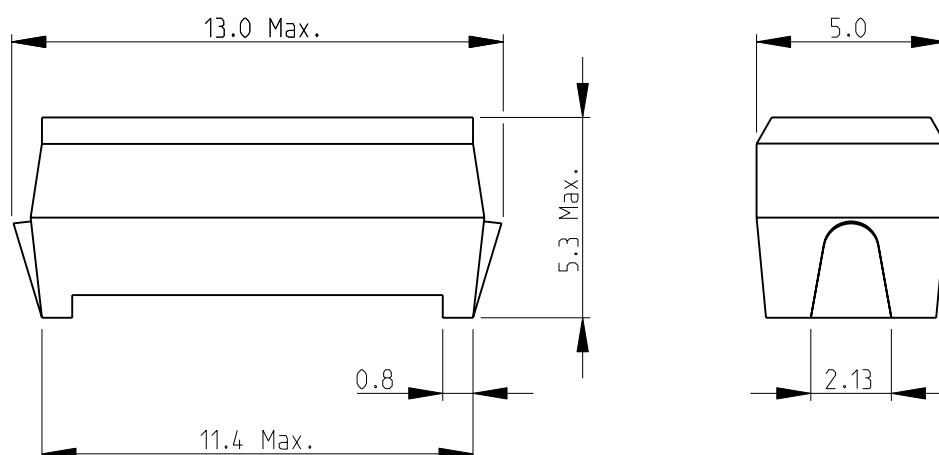


1 PACKAGING: SUPPLIED TAPED AND REELED ON 13" REELS IN QUANTITIES OF 1500 PIECES

2 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3615 SERIES-HIGH CURRENT INDUCTOR SMD

RECOMMENDED LAND PATTERN

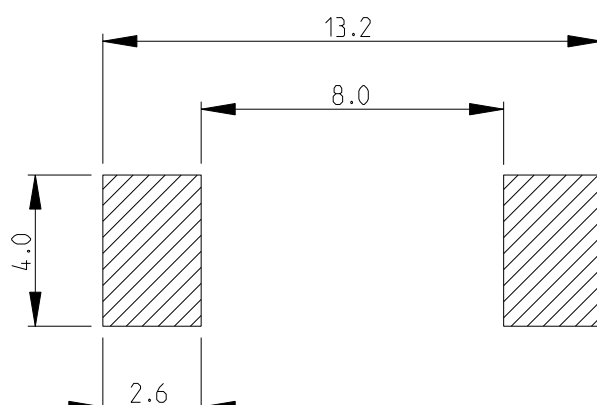

RoHS Compliant

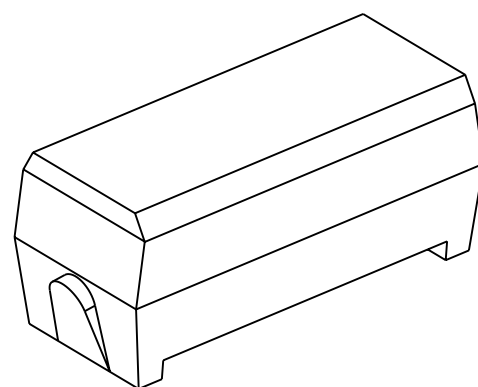

2008

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

BY -

COPYRIGHT 2008



DIMENSIONS:		DWN	13-NOV-08	MATERIAL		FINISH			
mm		SUBHASH.M		-		-			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	13-NOV-08	TE Connectivity					
		PRAKASH.S							
		APVD	13-NOV-08						
		STEPHEN.P							
0 PLC ±0.2		PRODUCT SPEC		NAME					
1 PLC ±0.1		-							
2 PLC ±-		APPLICATION SPEC		HIGH CURRENT INDUCTOR SMD SERIES 3615					
3 PLC ±-									
4 PLC ±-				SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
ANGLES ±5°		-		A 4		00779	Ⓒ- 1624097	-	
		WEIGHT 0.7g max.							
		-							
CUSTOMER DRAWING						SCALE	5:1	SHEET 1 OF 1	REV BA1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3615A1R0K](#)