

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

BY

ALL RIGHTS RESERVED

LOC

DIST

REVISIONS

P

LIR

DESCRIPTION

DATE

OWN

APVD

A2


REVISED PER

ECR-16-012124


07DEC16

T.Q

W.H

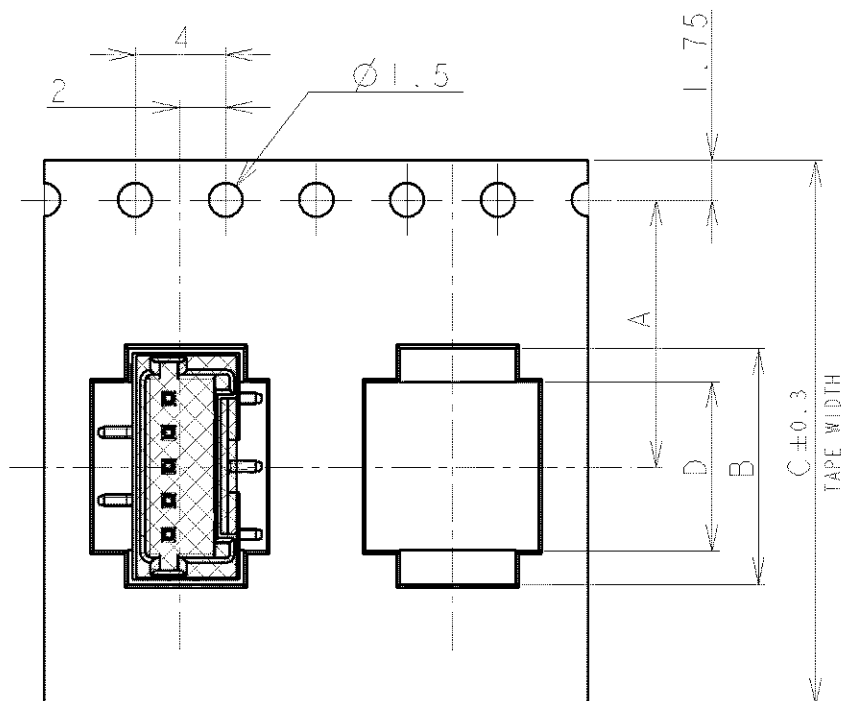

TYPE 1

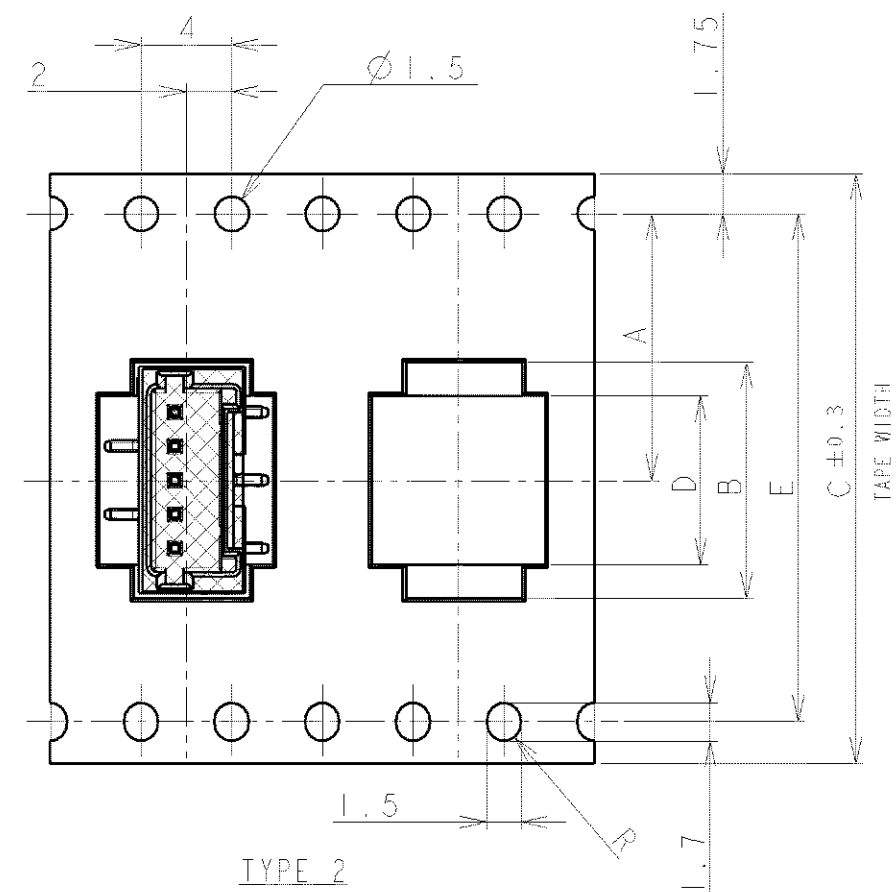

TYPE 2

TOLERANCES UNLESS OTHERWISE SPECIFIED:

10> : ±0.2
30> * >10 : ±0.25
100> * >30 : ±0.3
ANGLE : ±3°


NOTE:

1. PEELING STRENGTH: 0.20-0.69N (20-70gf)

PEELING ANGLE: 165-180°

PEELING SPEED: 300mm/MINUTE.



ADHESIVE TAPE

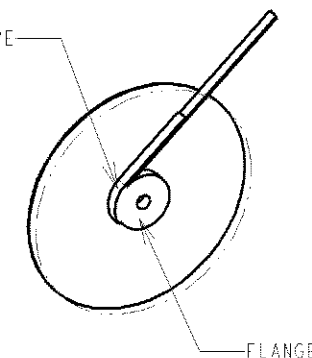


FLANGE

SECURE TO FLANGE WITH ADHESIVE TAPE


COVER TAPE

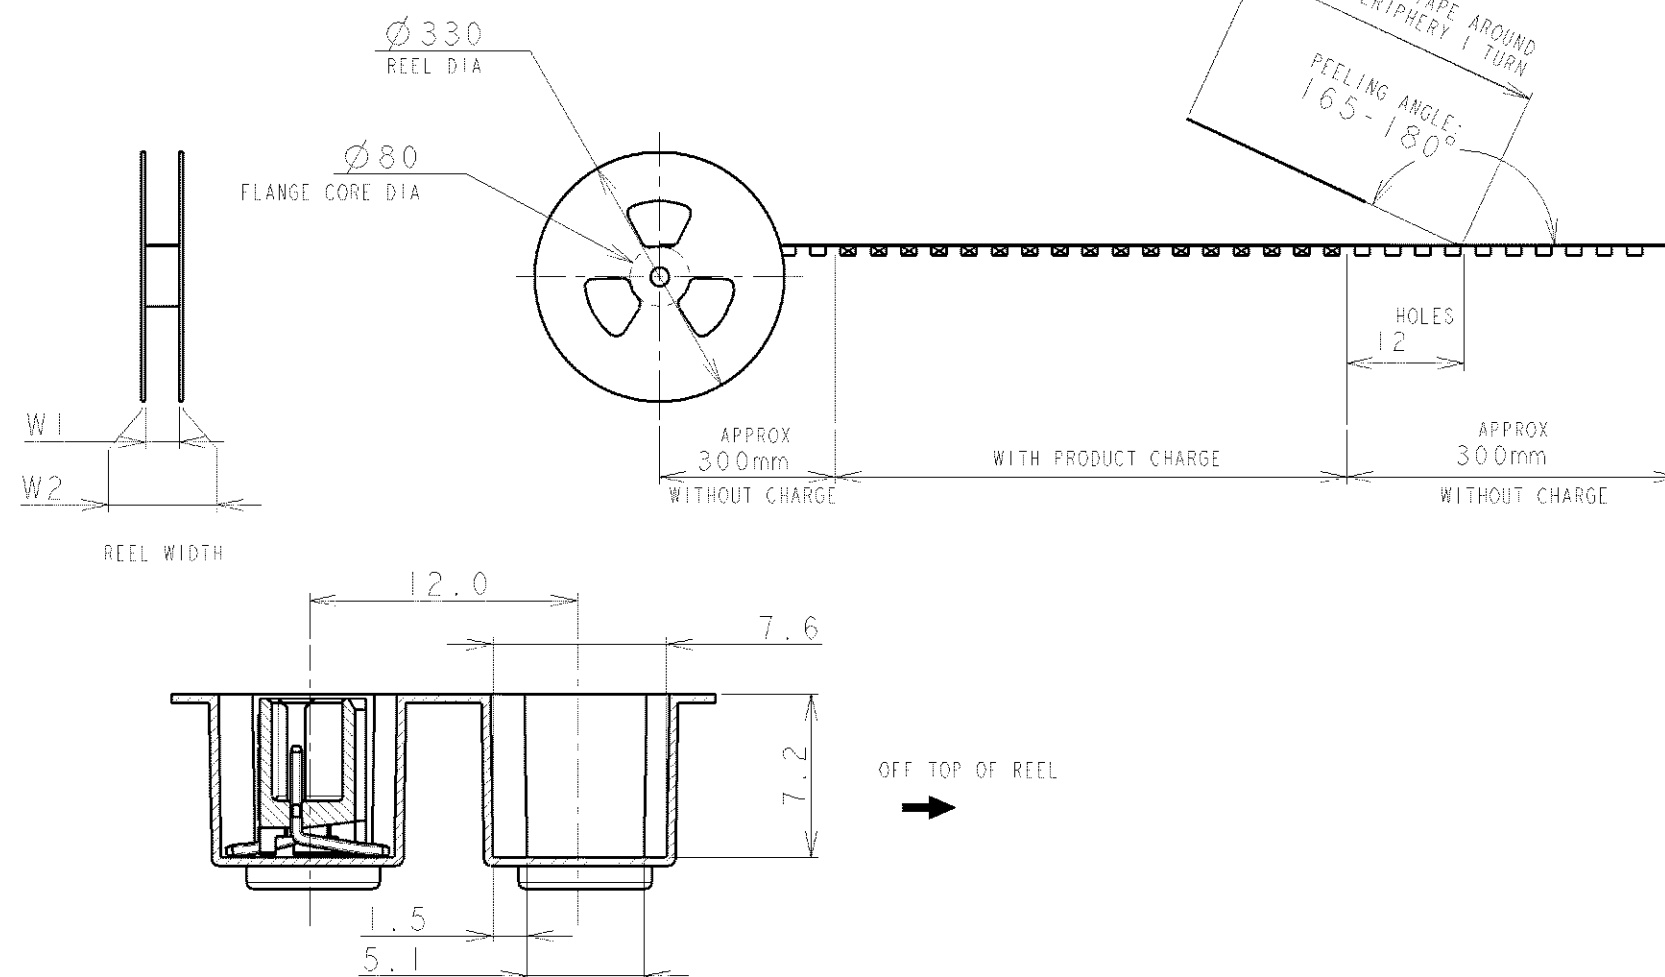

OFF TOP OF REEL

		DWN S.XU	31JAN03			TE Connectivity	
		CHK S.YAO	31JAN03				
		APVD T.SASAKI	31JAN03	NAME			
		PRODUCT SPEC 108-60018	AMP Mini Common Terminated (CT) Connector 1.5mm PITCH				
		APPLICATION SPEC 114-5223	SINGLE ROW POST HDR ASS'Y (V) SMT TYPE				
		WEIGHT	WITH BOSS, POLYIMIDE TAPE, EMBOSS TAPE PACKAGED				
DIMENSIONS: mm				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL				A3	00779	C-292232	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER DRAWING		SCALE	SHEET		OF
0 PLC ±				NON	1		4
1 PLC ±							
2 PLC ±							
3 PLC ±							
4 PLC ±							
ANGLES ±							
FINISH							

LOC	DIST	REVISIONS							DATE	DWN	APVD
FB	00	P	LTR	DESCRIPTION							
				SEE SHEET 1							

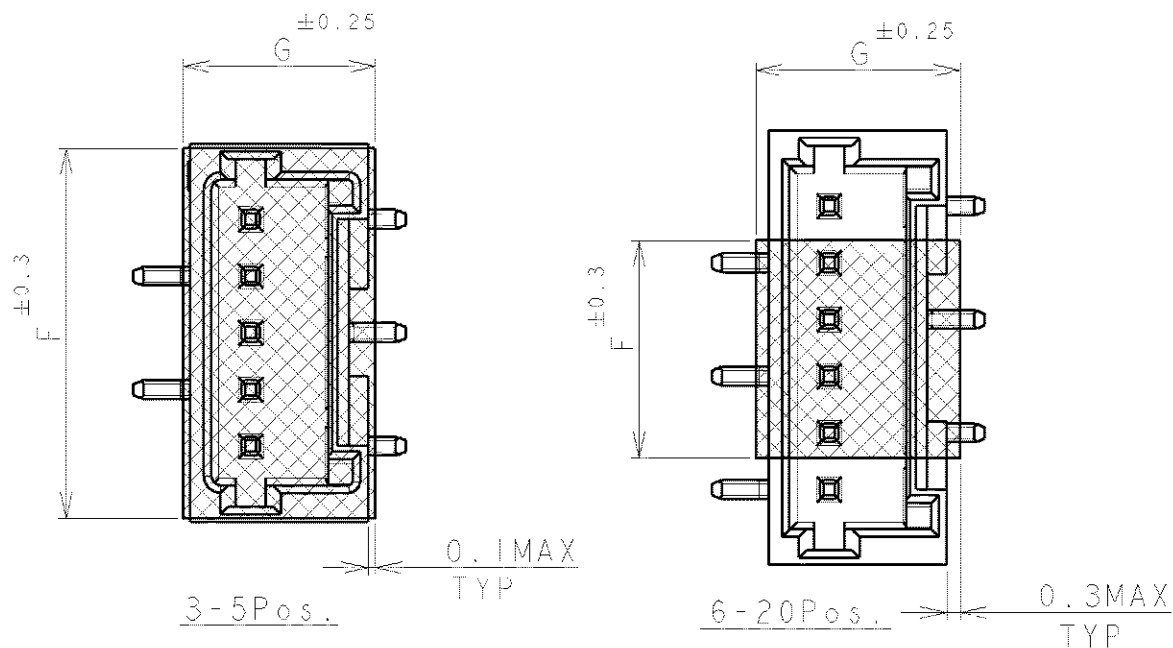

TYPE 2	49.5	45.5	5.0	9.5	40.4	29.9	44	32.9	20.2±0.15	500	20	BEIGE	2-292232-0
	49.5	45.5	5.0	9.5	40.4	28.4	44	31.4		500	19		1-292232-9
	49.5	45.5	5.0	9.5	40.4	26.9	44	29.9		500	18		1-292232-8
	49.5	45.5	5.0	9.5	40.4	25.4	44	28.4		500	17		1-292232-7
	49.5	45.5	5.0	9.5	40.4	23.9	44	26.9		500	16		1-292232-6
	49.5	45.5	5.0	9.5	40.4	22.4	44	25.4		500	15		1-292232-5
	49.5	45.5	5.0	9.5	40.4	20.9	44	23.9		500	14		1-292232-4
	49.5	45.5	5.0	9.5	40.4	19.4	44	22.4		500	13		1-292232-3
	37.5	33.5	5.0	9.5	28.4	17.9	32	20.9	14.2	500	12		1-292232-2
	37.5	33.5	5.0	9.5	28.4	16.4	32	19.4	14.2	500	11		1-292232-1
	37.5	33.5	5.0	9.5	28.4	14.9	32	17.9	14.2	500	10		1-292232-0
	37.5	33.5	5.0	6.5	28.4	13.4	32	16.4	14.2	500	9		292232-9
TYPE 1	29.5	25.5	5.0	6.5	-	11.9	24	14.9	11.5	500	8		292232-8
	29.5	25.5	5.0	6.5	-	10.4	24	13.4	11.5	500	7		292232-7
	29.5	25.5	5.0	6.5	-	8.9	24	11.9	11.5	500	6		292232-6
	29.5	25.5	5.0	9.5	-	7.4	24	10.4	11.5	500	5		292232-5
	21.5	17.5	5.0	8.0	-	5.9	16	8.9	7.5	500	4		292232-4
	21.5	17.5	5.0	6.5	-	4.4	16	7.4	7.5	500	3		292232-3
TAPE TYPE	W2	W1	G	F	E	D	C	B	A	QTY/REEL	POS	COLOR	ON TAPE P/N

DIMENSIONS




DIMENSIONS: mm		DWN		MATERIAL		FINISH	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK					
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		APVD					
PRODUCT SPEC		NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH					
SEE SHEET 1		SINGLE ROW POST HDR ASS'Y (V) SMT TYPE					
APPLICATION SPEC		WITH POLYIMIDE TAPE, WITH BOSS, EMOSS TAPE PACKAGED					
SEE SHEET 1		SIZE		CAGE CODE		DRAWING NO	
WEIGHT		A4		00779		G-292232	
CUSTOMER DRAWING		SCALE		NON		SHEET 2 OF 4	
						REV A2	

THIS DRAWING IS UNPUBLISHED





RELEASED FOR PUBLICATION

COPYRIGHT BY ALL RIGHTS RESERVED.

LOC	REV	REVISIONS				DATE	DWN	APVD
FB	00	P	LIR	DESCRIPTION				
				SEE SHEET 1				

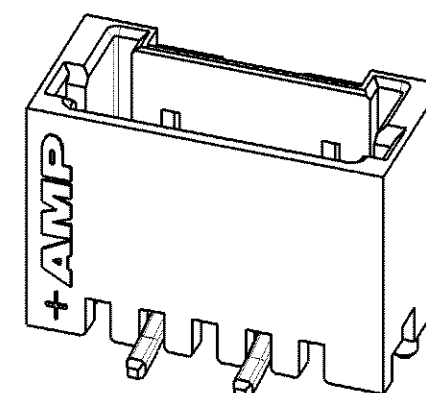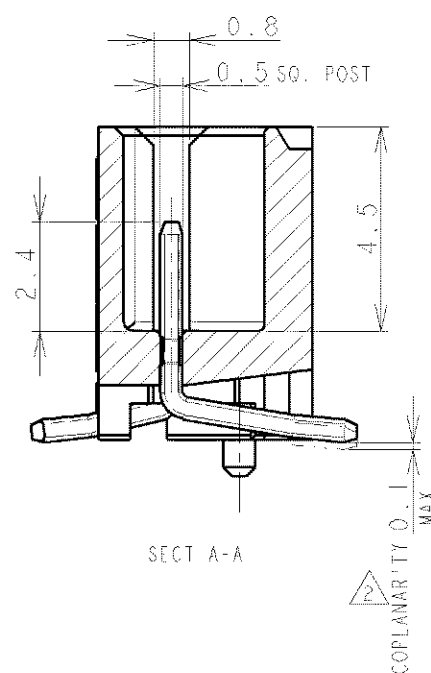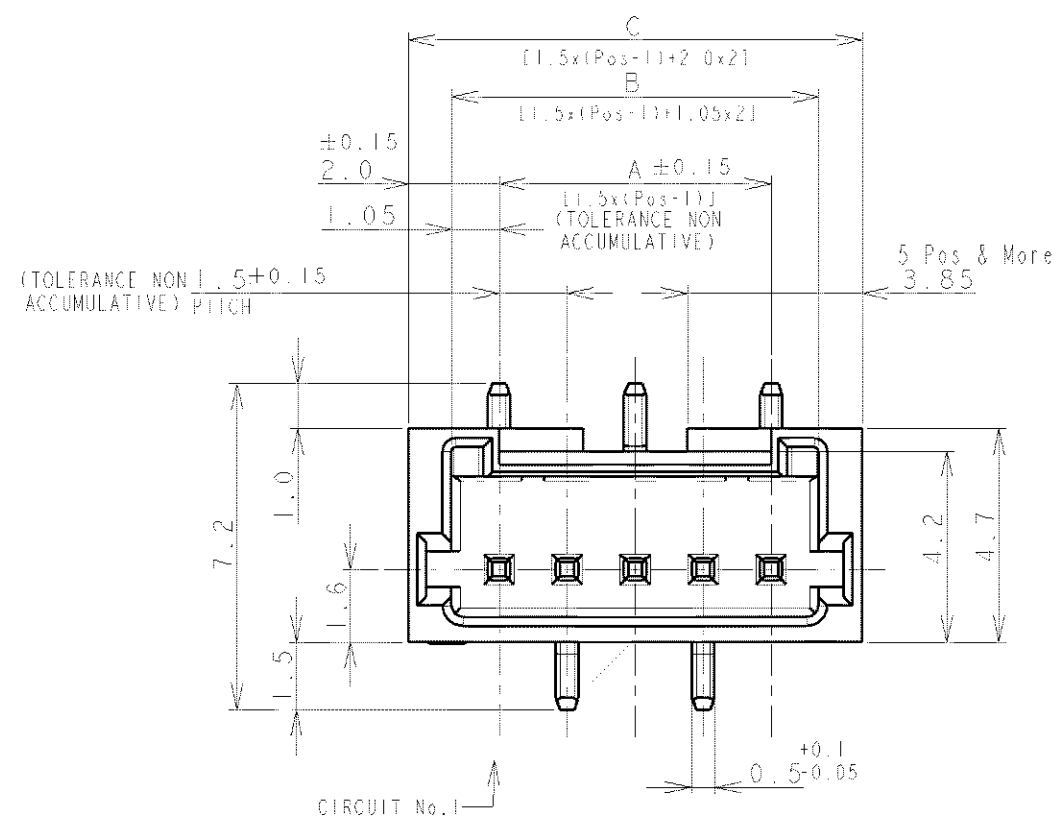

CIRCUIT No. 1

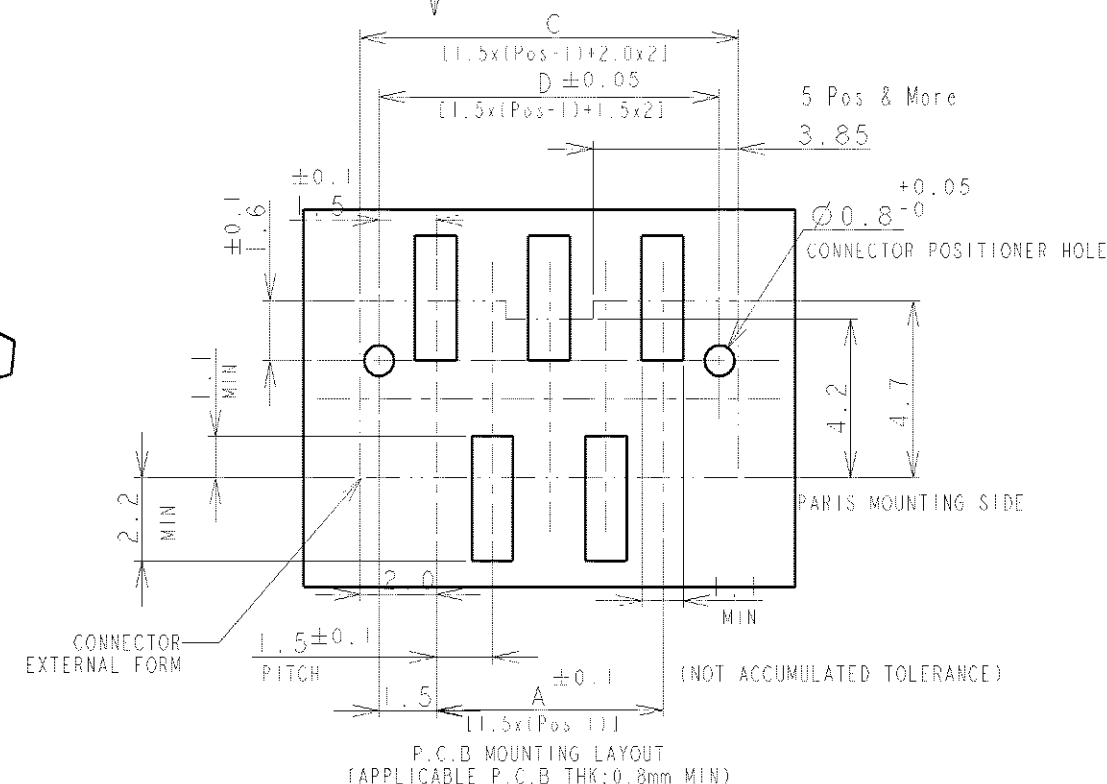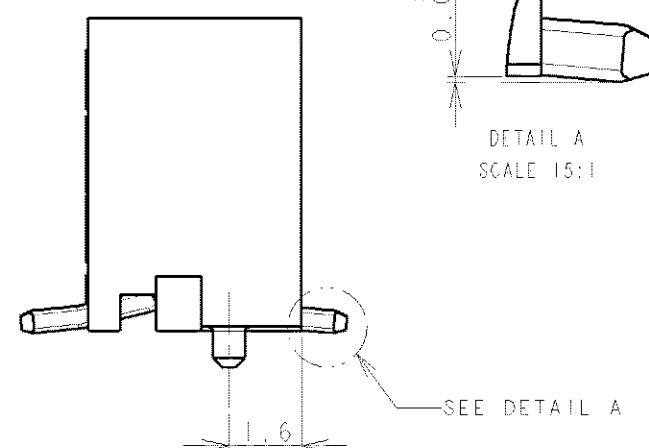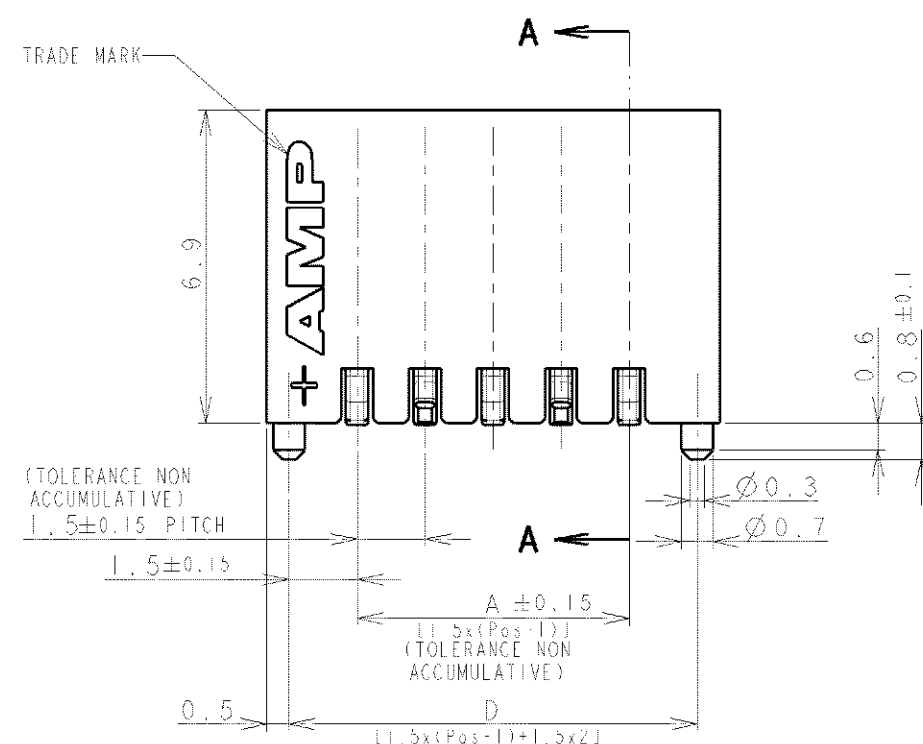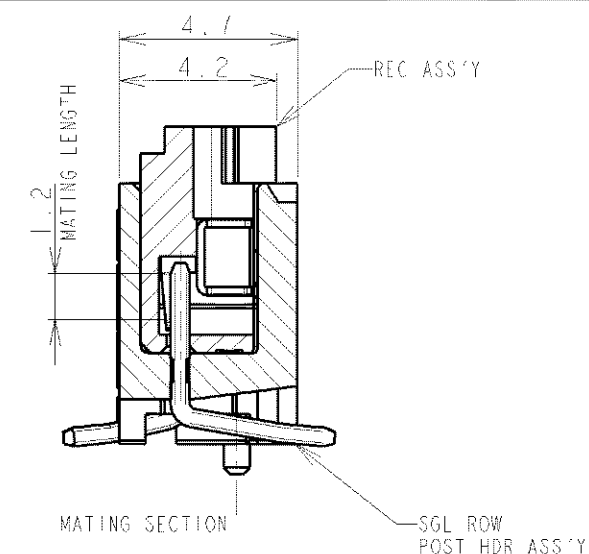

SHOWN AS WIHTOUT TAPE

NOTES:
 1. MATERIAL: GLASS FILLED, HIGH HEAT RESISTANT NYLON, UL94V-0, COLOR: BEIGE OR BLACK
 POST: Sn-100% BRASS WIRE
 TO BE MEASURED WITH CONNECTOR PLACED ON HORIZONTAL DATUM SURFACE,
 FLOAT OF SOLDER TINE FROM DATUM SURFACE IS 0.1mm MAX.

DWN		CHK		APVD		PRODUCT SPEC		APPLICATION SPEC		WEIGHT		CUSTOMER DRAWING		SCALE		SHEET		REV	
SEE NOTE 1		SEE NOTE 1		A3		00779		C-292232		NON		3		4		A2			

TE Connectivity

AMP MINI COMMON TERMINATION (CT) CONNECTOR 1.5 mm PITCH
 SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-292232 RESTRICTED TO:

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY - COPYRIGHT -

LOC	DIST	REVISIONS					
FB	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1	-	-	-

0.98	31.5	32.5	30.6	28.5	20	2-292232-0
0.93	30.0	31.0	29.1	27.0	19	1-292232-9
0.89	28.5	29.5	27.6	25.5	18	1-292232-8
0.84	27.0	28.0	26.1	24.0	17	1-292232-7
0.80	25.5	26.5	24.6	22.5	16	1-292232-6
0.75	24.0	25.0	23.1	21.0	15	1-292232-5
0.71	22.5	23.5	21.6	19.5	14	1-292232-4
0.66	21.0	22.0	20.1	18.0	13	1-292232-3
0.62	19.5	20.5	18.6	16.5	12	1-292232-2
0.57	18.0	19.0	17.1	15.0	11	1-292232-1
0.52	16.5	17.5	15.6	13.5	10	1-292232-0
0.48	15.0	16.0	14.1	12.0	9	292232-9
0.43	13.5	14.5	12.6	10.5	8	292232-8
0.39	12.0	13.0	11.1	9.0	7	292232-7
0.34	10.5	11.5	9.6	7.5	6	292232-6
0.30	9.0	10.0	8.1	6.0	5	292232-5
0.25	7.5	8.5	6.6	4.5	4	292232-4
0.20	6.0	7.0	5.1	3.0	3	292232-3
WEIGHT (g)	D	C	B	A	Pos.	BEIGE (NAT)
	DIMENSIONS					P/N

DIMENSIONS: mm	DWN	MATERIAL SEE SHEET 1	FINISH SEE SHEET 1
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	 TE Connectivity	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	APVD		
	PRODUCT SPEC	NAME AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5 mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS	
	APPLICATION SPEC	SIZE A4	CAGE CODE 00779
	WEIGHT	DRAWING NO G=292232	RESTRICTED TO
CUSTOMER DRAWING		SCALE NON	SHEET 4 OF 4
		REV A2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-292232-0](#)