
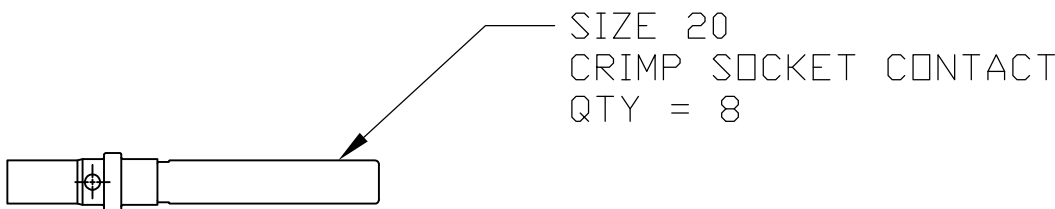
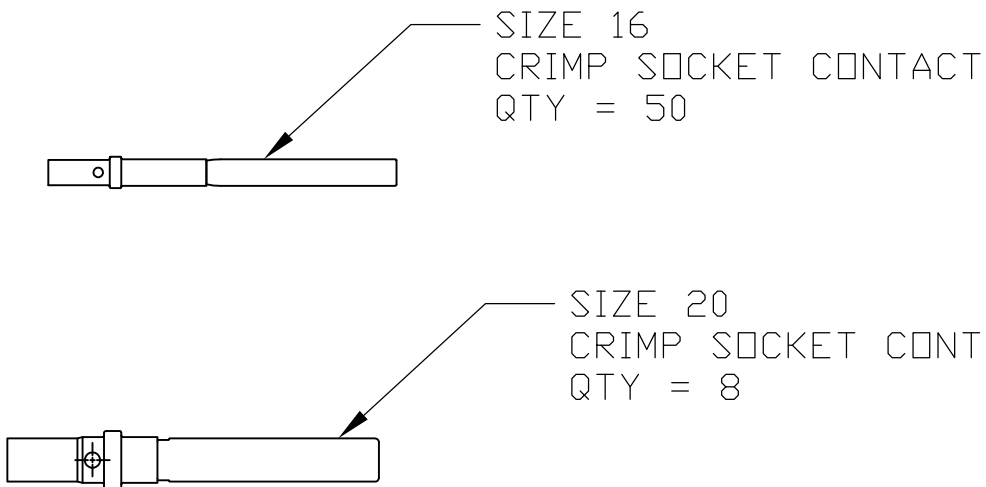
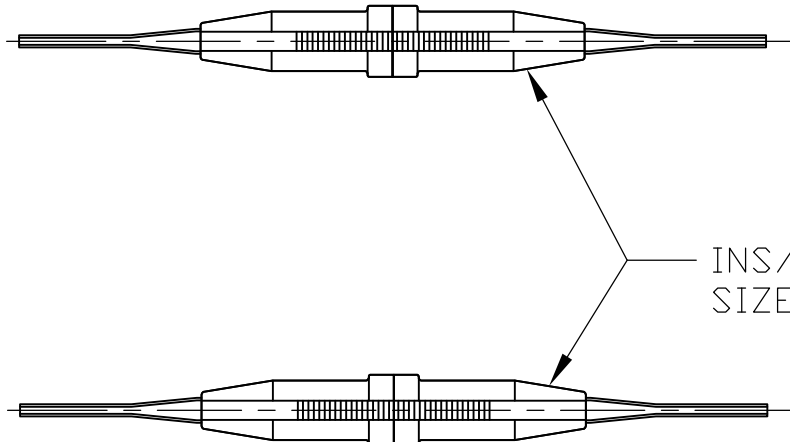
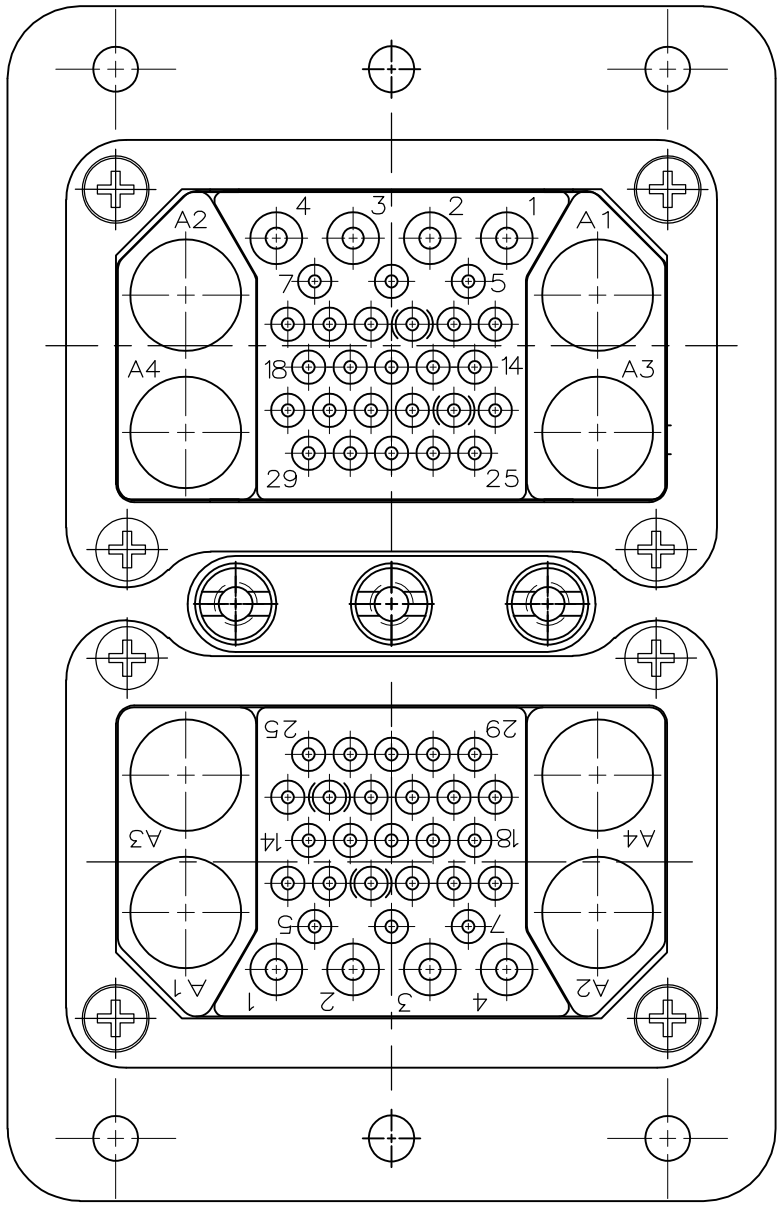
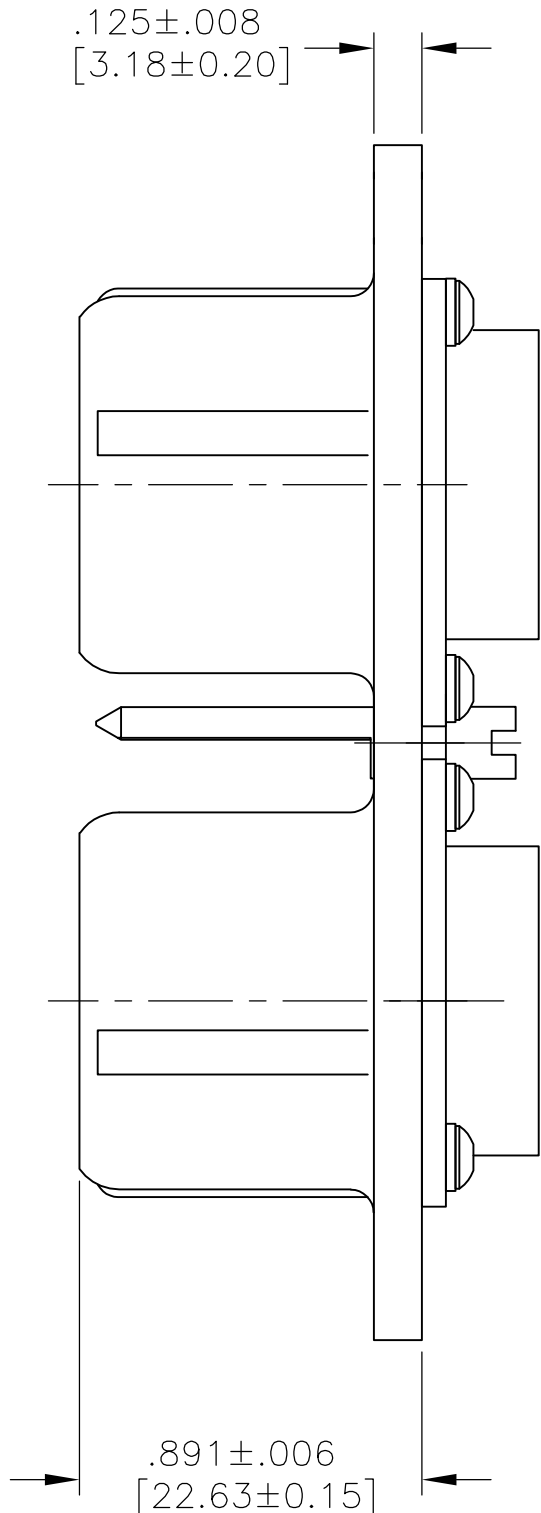


LOC		DIST		REVISONS			
P	T	L	TR	DESCRIPTION	DATE	DWN	APVD
		A		RELEASED	3-13-14	CT	DE

- 1TE PART NO. AND DESCRIPTIVE PART NO. MARKED IS THESE AREAS.
- 2"AMP" AND DATE CODE MARKED IN THIS AREA.
3. KEYING ASSEMBLED IN THE "01" POSITION.
4. MATERIAL AND FINISH:
SHELL: DIE CAST ALUMINUM ALLOY PER SPEC QQ-A-591.
STANDARD FINISH: CADMIUM PLATE PER QQ-P-416, TYPE I,
CLASS 2 YELLOW CHROMATE CONVERSION.
INSERT RETENTION PLATE: ALUMINUM ALLOY, BLUE ANODIZE
PER MIL-A-8625.
SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATED.
POLARIZING POSTS: STAINLESS STEEL, PASSIVATED.
POLARIZING NUTS: BRASS, CADMIUM PLATED.

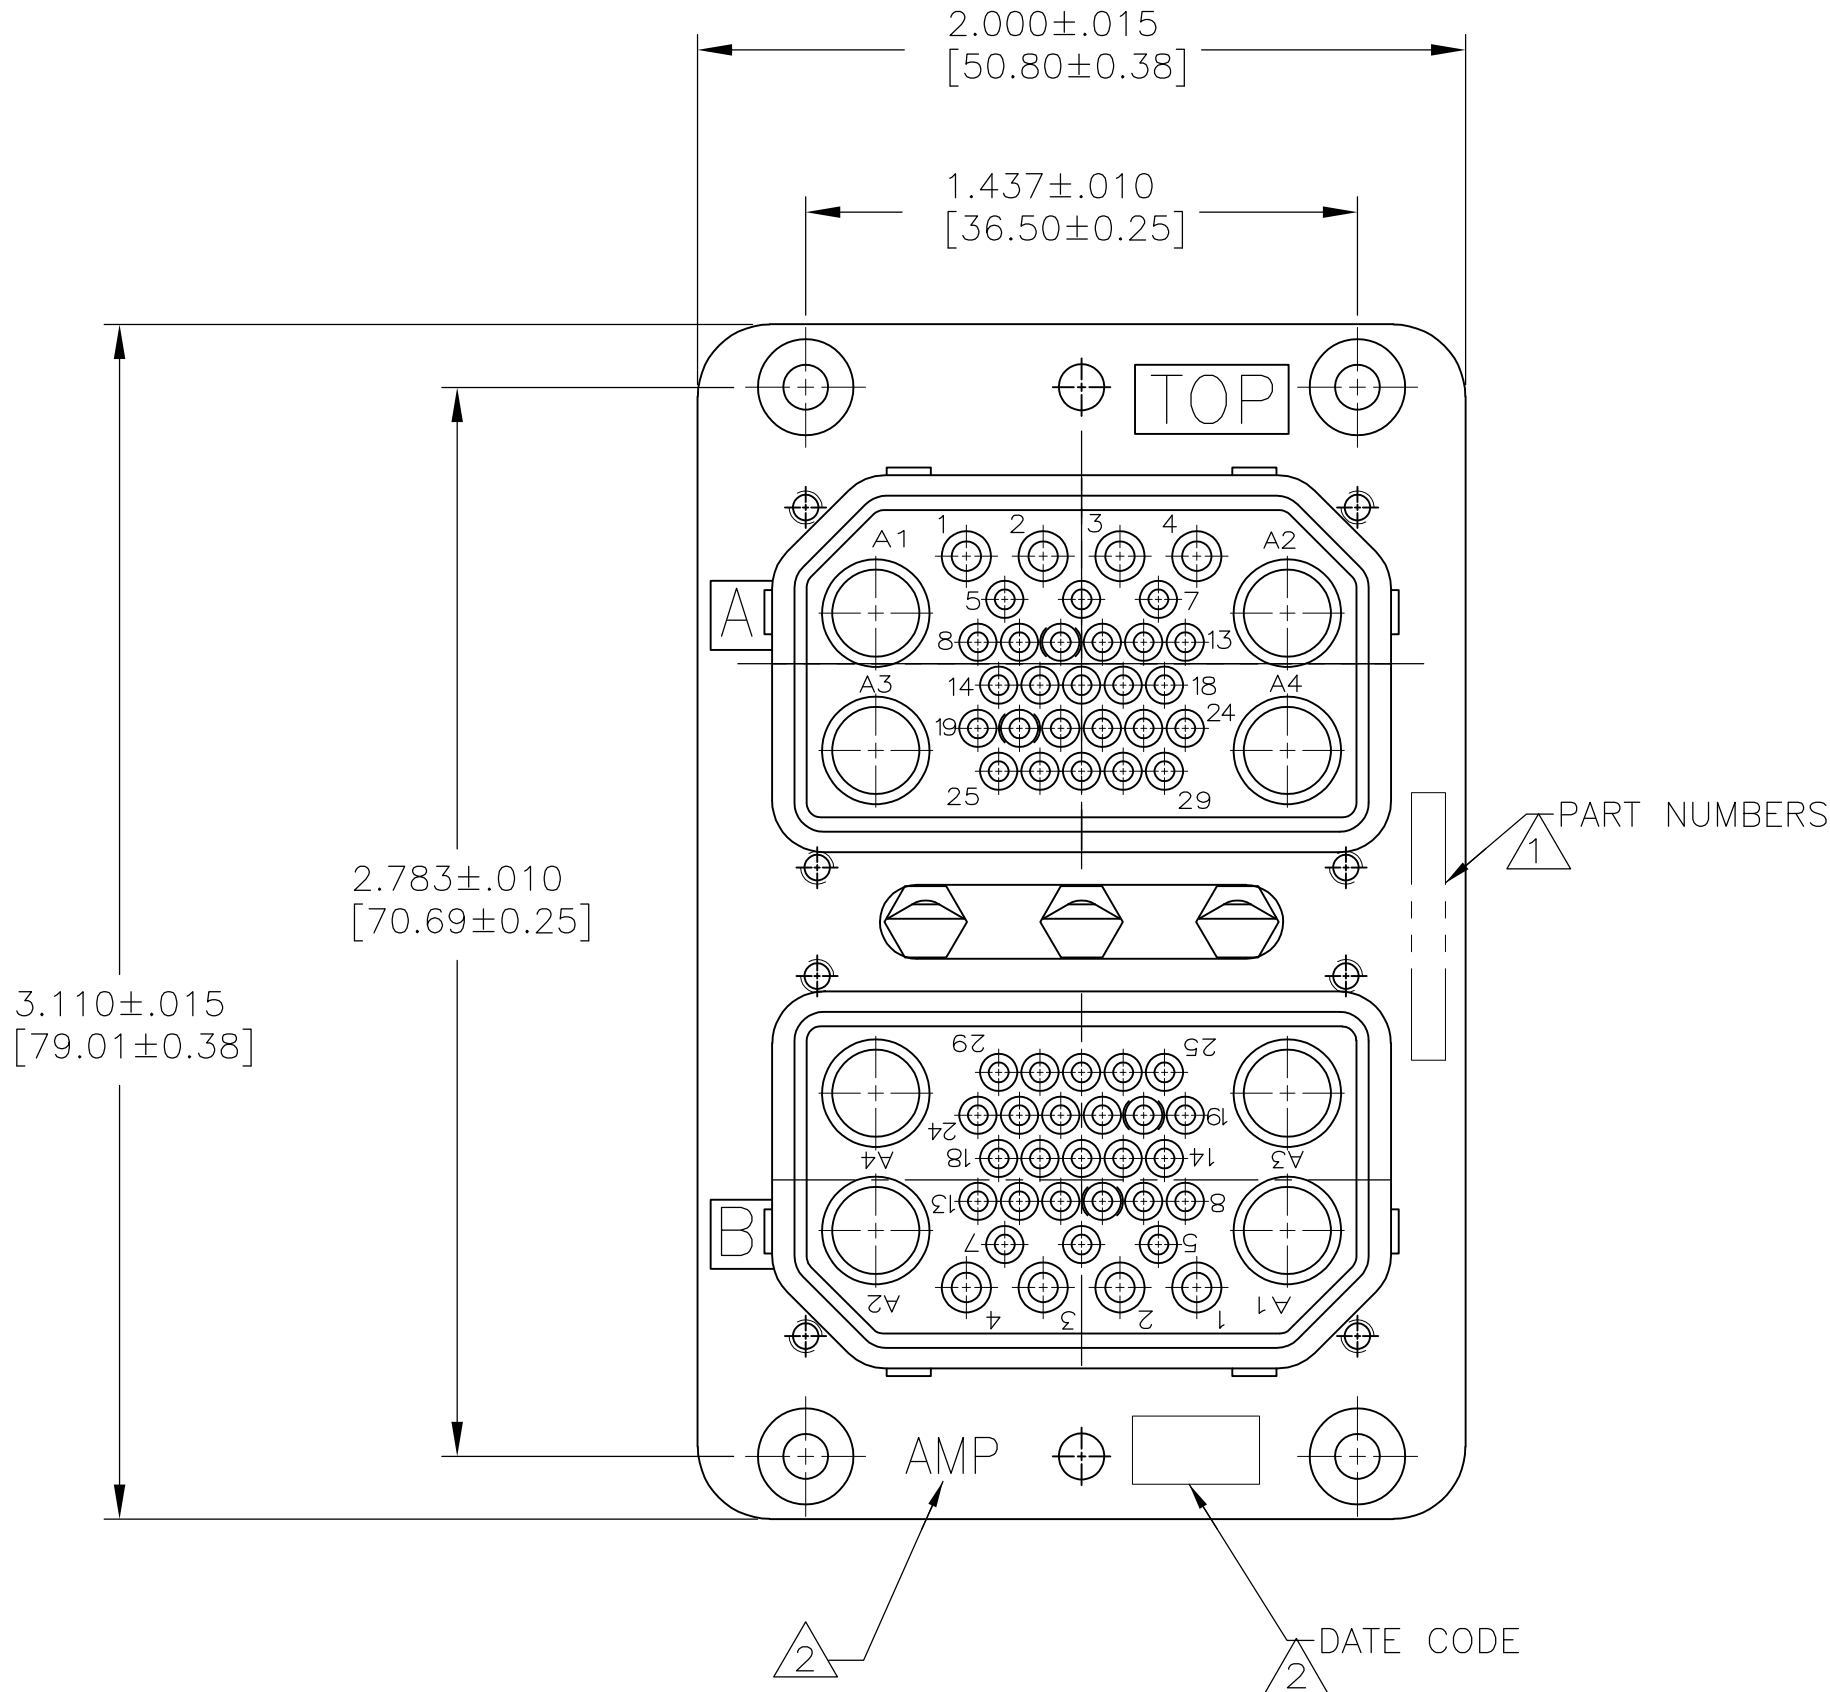

1218528-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS CHK D.EARY	3-13-14	TE Connectivity			
DIMENSIONS: INCHES [MM]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSY,ARINC 404,RM2P33C4S33C4S-0001 (200)			
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		± .005 [0.13] ± .005 [0.13] ± .005 [0.13] ± .005 [0.13] ± .005 [0.13] ± .005 [0.13]		APVD D.EARY PRODUCT SPEC			
MATERIAL -		FINISH -		APPLICATION SPEC			
				WEIGHT -			
				RESTRICTED TO -			
				CUSTOMER DRAWING			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1218528-1](#)