


PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" $\pm .3$ [7]
MLT2H-LP316	50	2" [51]	7.9" [201]
MLT2.7H-LP316	50	2.7" [69]	10.2" [259]
MLT4H-LP316	50	4" [102]	14.3" [362]
MLT6H-LP316	50	6" [152]	20.5" [521]
MLT8H-LP316	50	8" [203]	26.8" [679]
MLT10H-LP316	50	10" [254]	33.0" [838]
MLT2H-TL316	250	2" [51]	7.9" [201]
MLT4H-TL316	250	4" [102]	14.3" [362]

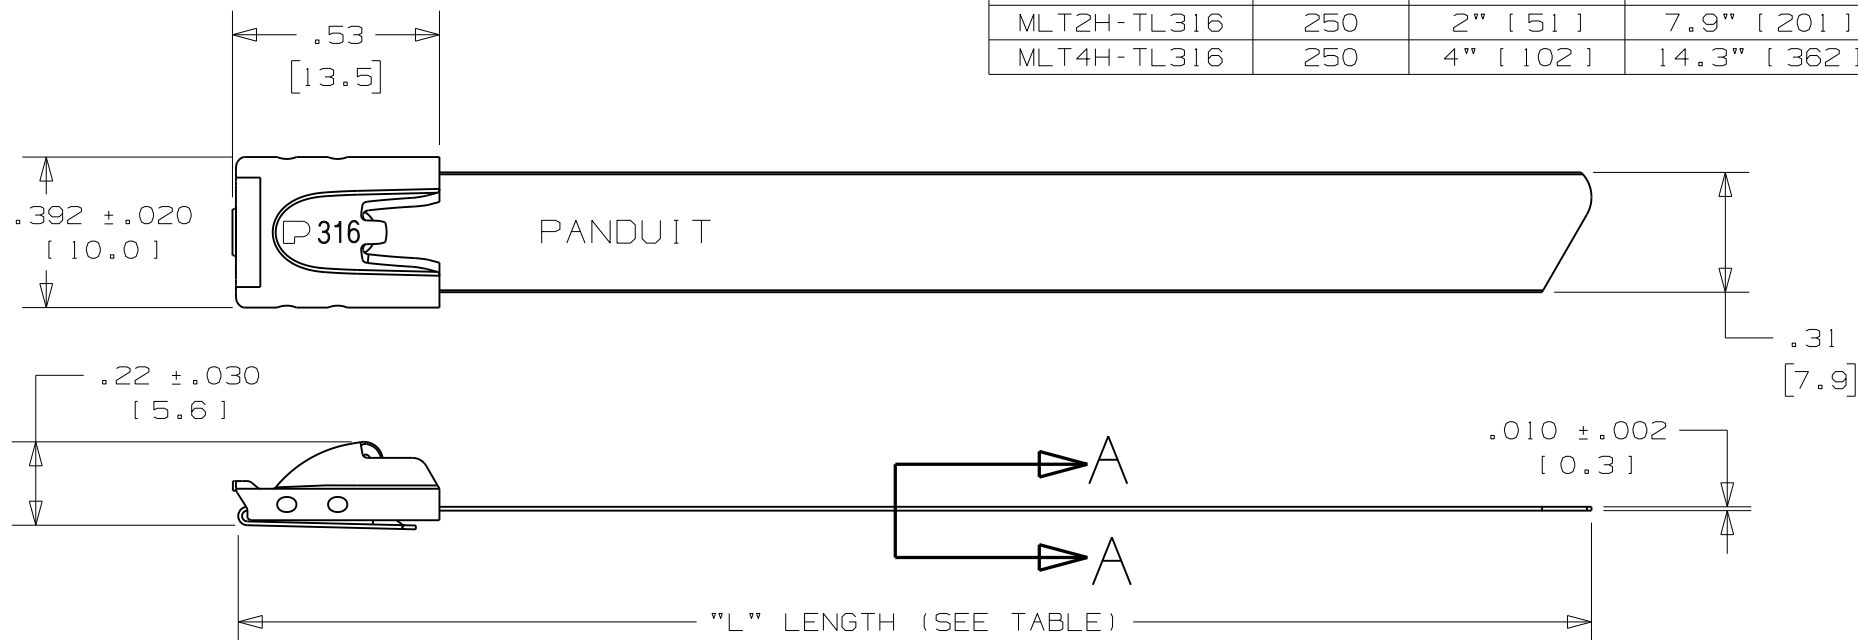

NOTES:

1. APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,ST3MT,HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 450 LBS (2000 NEWTONS)
WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = $\pm$.010 [.25] .XX = $\pm$.020 [.5]
 .X = $\pm$.030 [.8] ANGLES = $\pm$ 2°
5. MATERIAL: 316 STAINLESS STEEL

FULLY ROUNDED
EDGES ALONG
STRAP BODY

SECTION A - A
SCALE 6:1

					PANDUIT CORP. TINLEY PARK, ILLINOIS METAL LOCKING TIE HEAVY SERIES -316 STAINLESS STEEL - CUSTOMER DRAWING -			
06A	2/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY				
REV	DATE	BY	CHK	DESCRIPTION	DRAWN BY JAMB	CHK'D DPN	SCALE 2x	DRAWING NO. N41116BS_DC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[MLT2H-LP316](#) [MLT4H-LP316](#) [MLT4H-TL316](#) [MLT6H-LP316](#) [MLT8H-LP316](#) [MLT10H-LP316](#) [MLT2.7H-LP316](#)