
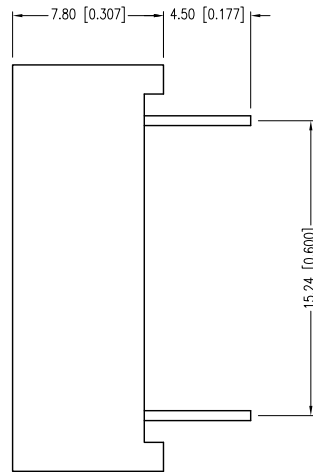


| PART NUMBER | LDD-F5404RI                         | REV. | C    |
|-------------|-------------------------------------|------|------|
| DATE        | E.C.N. NUMBER AND REVISION COMMENTS |      | REV. |
| 6.21.03     | E.C.N. #10BRDR. & REDRAWN.          |      | A    |
| 07.14.10    | E.C.N. #11651.                      |      | B    |
| 07.10.12    | E.C.N. #10BRDR. & REDRAWN.          |      | C    |

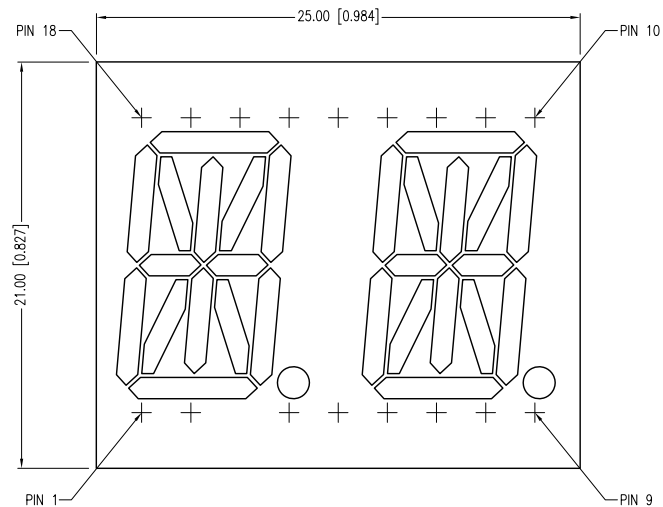




## ELECTRO-OPTICAL CHARACTERISTICS Ta=25°C If=10mA

| PARAMETER       | MIN                  | TYP  | MAX | UNITS | TEST COND |
|-----------------|----------------------|------|-----|-------|-----------|
| PEAK WAVELENGTH |                      | 635  |     | nm    |           |
| FORWARD VOLTAGE |                      | 2.0  | 2.5 | Vf    |           |
| REVERSE VOLTAGE | 5.0                  |      |     | Vr    | Ir=100µA  |
| AXIAL INTENSITY |                      | 2000 |     | µcd   | If=10mA   |
| EMITTED COLOR:  | RED                  |      |     |       |           |
| FACE COLOR:     | GRAY                 |      |     |       |           |
| LENS FINISH:    | MILKY WHITE DIFFUSED |      |     |       |           |

## LIMITS OF SAFE OPERATION AT 25°C PER DIE

| PARAMETER             | MAX        | UNITS |
|-----------------------|------------|-------|
| PEAK FORWARD CURRENT* | 150        | mA    |
| STEADY CURRENT        | 30         | mA    |
| POWER DISSIPATION     | 105        | mW    |
| DERATE FROM 25°C      | -1.6       | mW/°C |
| OPERATING TEMP.       | -40 TO +85 | °C    |
| STORAGE TEMP.         | -40 TO +85 | °C    |
| SOLDERING TEMP.       | +260       | °C    |
| 2.0mm FROM BODY       | 3          | SEC.  |

\* t&lt;10µS

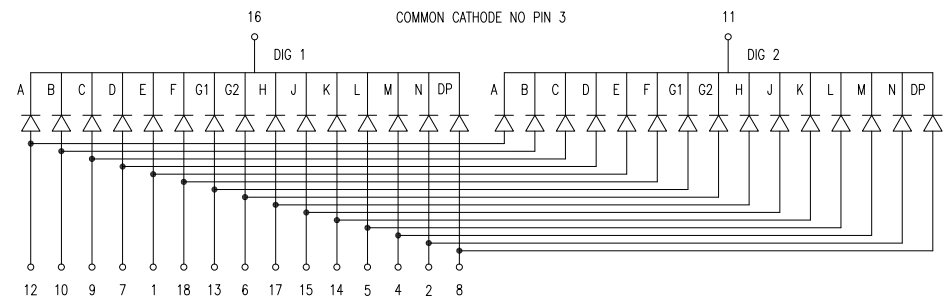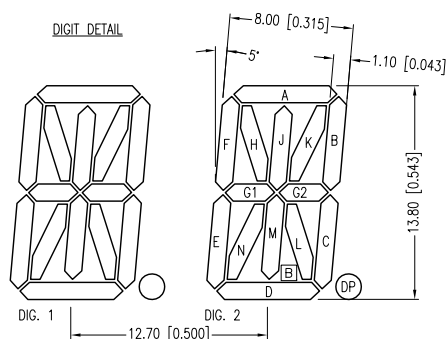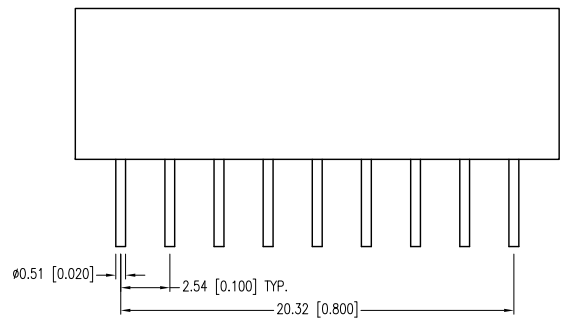

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +<sup>DECIMAL</sup> PRECISION MAX.= -<sup>DECIMAL</sup> PRECISION

UNCONTROLLED DOCUMENT

0.54" 14 SGMTS 2 DIGIT LED DSPLY, 635nm RED CHIPS, GRY FACE W/ WHT SEGM'S M-PLXED COM'N CATHODE.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDENTIAL INFORMATION  
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

|        |           |           |    |
|--------|-----------|-----------|----|
| DATE:  | 07.10.12  | DRAWN BY: | AB |
| PAGE:  | 1 OF 1    | CHKD BY:  | KF |
| SCALE: | NTS       | APRVD BY: | KF |
| UNIT:  | mm [INCH] |           | Ⓢ  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumex:](#)

[LDD-F5404RI](#)