

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT

By

ALL RIGHTS RESERVED

LOC	
-----	--

DIST

AD

39

REVISIONS

P	LT
---	----

LTR

DESCRIPTION

DATE _____

DWRN	
------	--

	APV
--	-----

R

REVI


PER

Ω-14-000068


26APR

NK

	MM
--	----

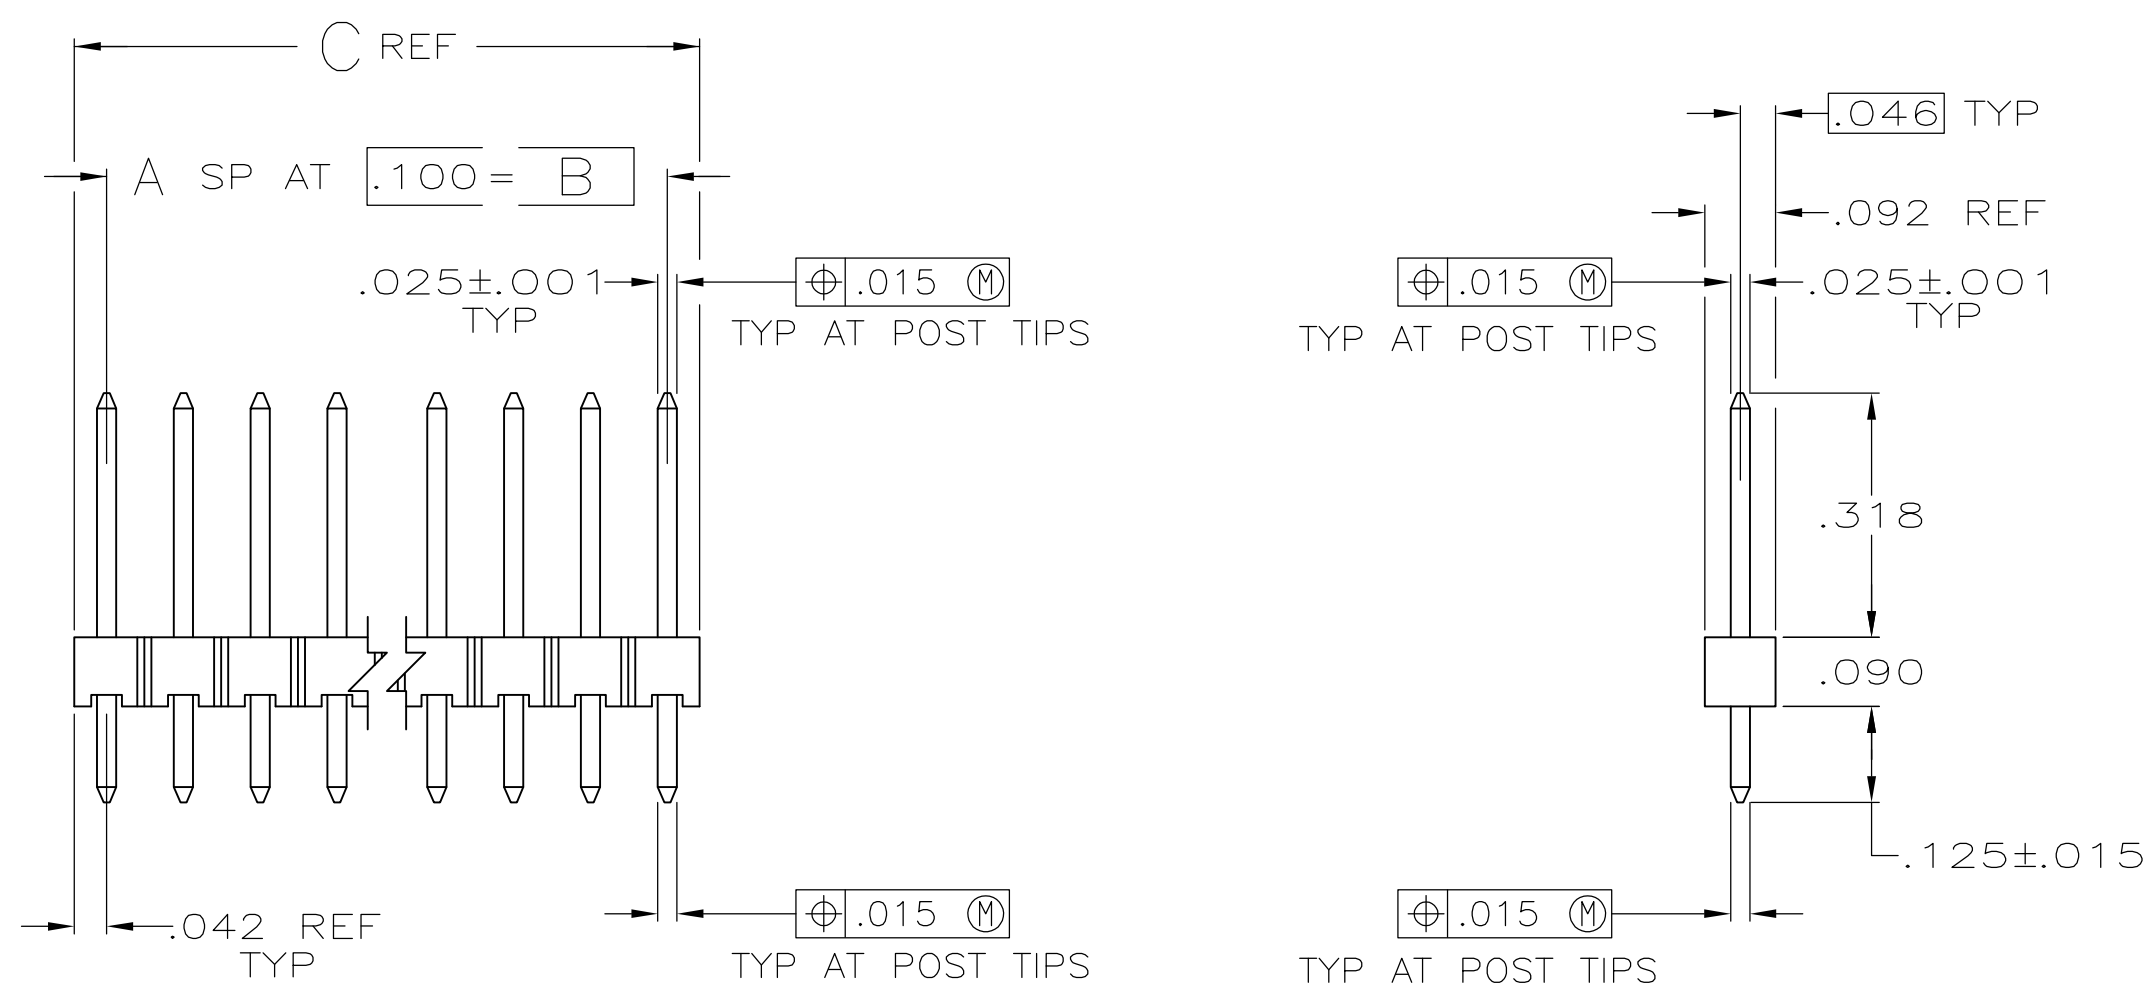


- | | |
|---|---|
| 1 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD |
| 2 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS |
| 3 | PACKAGE IN SINGLE TUBES |
| 4 | .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL. |
| 5 | .000100-.000200 BRIGHT TIN OVER .000050 NICKEL. |
| 6 | PRELIMINARY PART - NOT RELEASED FOR PRODUCTION. |
| 7 | HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. |
| 8 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

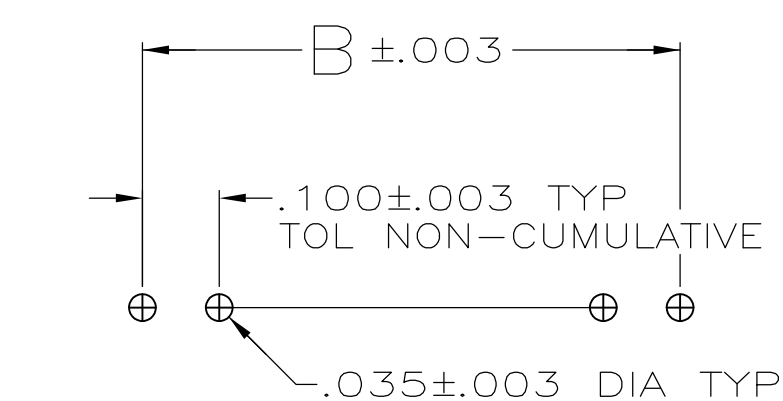

RECOMMENDED HOLE LAYOUT

		OBSOLETE	5			.484	.400	4	5	5-103321-3
			5		6	1.384	1.300	13	14	5-103321-2
			5		6	1.184	1.100	11	12	5-103321-1
			5		6	1.084	1.000	10	11	5-103321-0
			5		6	.884	.800	8	9	4-103321-9
			5			3.984	3.900	39	40	4-103321-8
			5			1.584	1.500	15	16	4-103321-7
			5			.784	.700	7	8	4-103321-6
			5			.284	.200	2	3	4-103321-5
			5			.184	.100	1	2	4-103321-4
			5		6	.084	—	—	1	4-103321-3
SUPERSEDED BY 1-103321-4					3	1.384	1.300	13	14	4-103321-2
SUPERSEDED BY 103321-3					3	.284	.200	2	3	4-103321-1
						3.984	3.900	39	40	4-103321-0
8	OBSOLETE		4			3.884	3.800	38	39	3-103321-9
8	OBSOLETE		4			3.784	3.700	37	38	3-103321-8
8	OBSOLETE		4			3.684	3.600	36	37	3-103321-7
			4			3.584	3.500	35	36	3-103321-6
8	OBSOLETE		4			3.484	3.400	34	35	3-103321-5
8	OBSOLETE		4			3.384	3.300	33	34	3-103321-4
8	OBSOLETE		4			3.284	3.200	32	33	3-103321-3
8	OBSOLETE		4			3.184	3.100	31	32	3-103321-2
8	OBSOLETE		4			3.084	3.000	30	31	3-103321-1
8	OBSOLETE		4			2.984	2.900	29	30	3-103321-0
8	OBSOLETE		4			2.884	2.800	28	29	2-103321-9
8	OBSOLETE		4			2.784	2.700	27	28	2-103321-8
8	OBSOLETE		4			2.684	2.600	26	27	2-103321-7
8	OBSOLETE		4			2.584	2.500	25	26	2-103321-6
			4			2.484	2.400	24	25	2-103321-5
8	OBSOLETE		4			2.384	2.300	23	24	2-103321-4
8	OBSOLETE		4			2.284	2.200	22	23	2-103321-3
8	OBSOLETE		4			2.184	2.100	21	22	2-103321-2
8	OBSOLETE		4			2.084	2.000	20	21	2-103321-1
8	SUPERSEDED BY 7-146274-0		4			1.984	1.900	19	20	2-103321-0
8	OBSOLETE		4			1.884	1.800	18	19	1-103321-9
8	OBSOLETE		4			1.784	1.700	17	18	1-103321-8
8	OBSOLETE		4			1.684	1.600	16	17	1-103321-7
			4			1.584	1.500	15	16	1-103321-6
8	OBSOLETE		4			1.484	1.400	14	15	1-103321-5
			4			1.384	1.300	13	14	1-103321-4
8	OBSOLETE		4			1.284	1.200	12	13	1-103321-3
8	OBSOLETE		4			1.184	1.100	11	12	1-103321-2
8	OBSOLETE		4			1.084	1.000	10	11	1-103321-1
			4			.984	.900	9	10	1-103321-0
			4			.884	.800	8	9	103321-9
			4			.784	.700	7	8	103321-8
			4			.684	.600	6	7	103321-7
			4			.584	.500	5	6	103321-6
			4			.484	.400	4	5	103321-5
			4			.384	.300	3	4	103321-4
			4			.284	.200	2	3	103321-3
			4			.184	.100	1	2	103321-2
			4			.084	—	—	1	103321-1
			</							

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 150C192 J. MARTINELLI CHK 2.3NOV92 JOHN KNITTLE APVD 2.3NOV92 B. FLINCHBAUGH		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± . 1 PLC ± . 2 PLC ± .005 3 PLC ± . SQUARE ANGLES ± .		NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS	
MATERIAL POST: COPPER ALLOY		FINISH SEE TABLE		PRODUCT SPEC APPLICATION SPEC	
		WEIGHT —		SIZE A1	
		CUSTOMER DRAWING		CASE CODE 00779	
		DRAWING NO C=103321		RESTRICTED —	
		SCALE 4:1		SHEET 1 of 1	
		REV —			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-103321-5](#)