

8			7					
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION			20		
(C) COPYRIGHT 20			BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.					
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION		
1852734-1		A	122500-1	LEADMAKER	AIR FEED	CUTS CARRIER		
1852734-2		A	565435-5	BENCH MODEL K	AIR FEED	CUTS CARRIER		
1852734-3		A	354500-1	BENCH MODEL G	AIR FEED	CUTS CARRIER		
1852734-6		A	122500-1	LEADMAKER	AIR FEED	CONTINUOUS CARRIER		
7-1852734-7		A	-	-	-	SPARE PARTS		

RECOMMENDED SPARE PARTS



GREASE LIGHTLY

GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE


INSULATION RANGE:

3.68-5.33mm - USE ITEM 3 PN 1213077-7 ("F" TYPE)

5.34-7.37mm - USE ITEM 15 PN 2-1633510-9 ("O" TYPE)

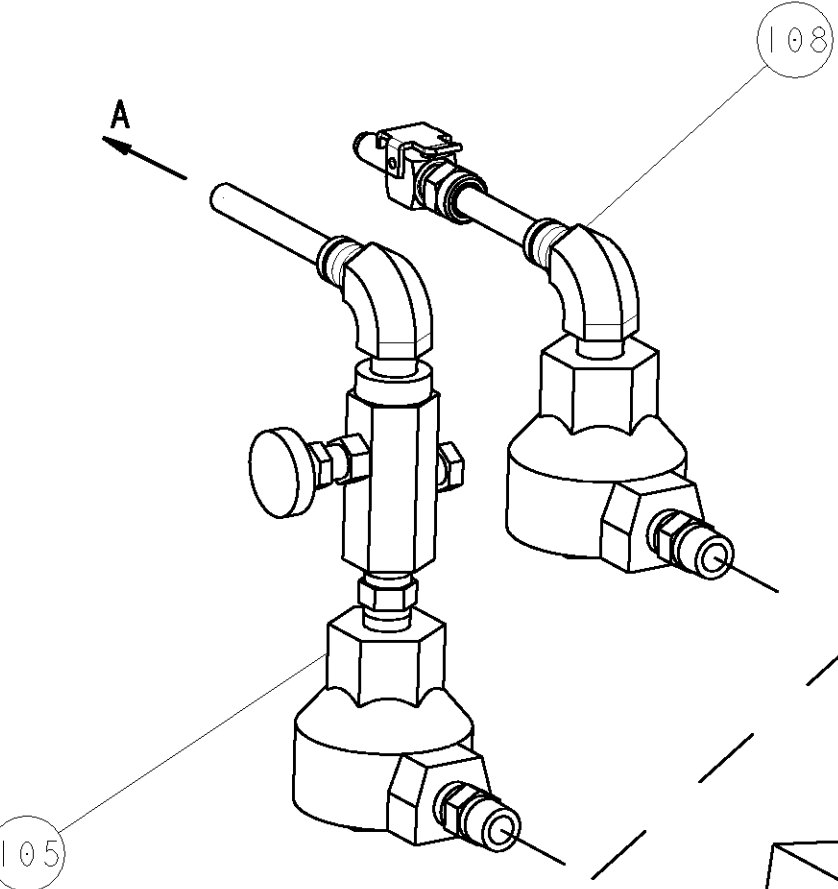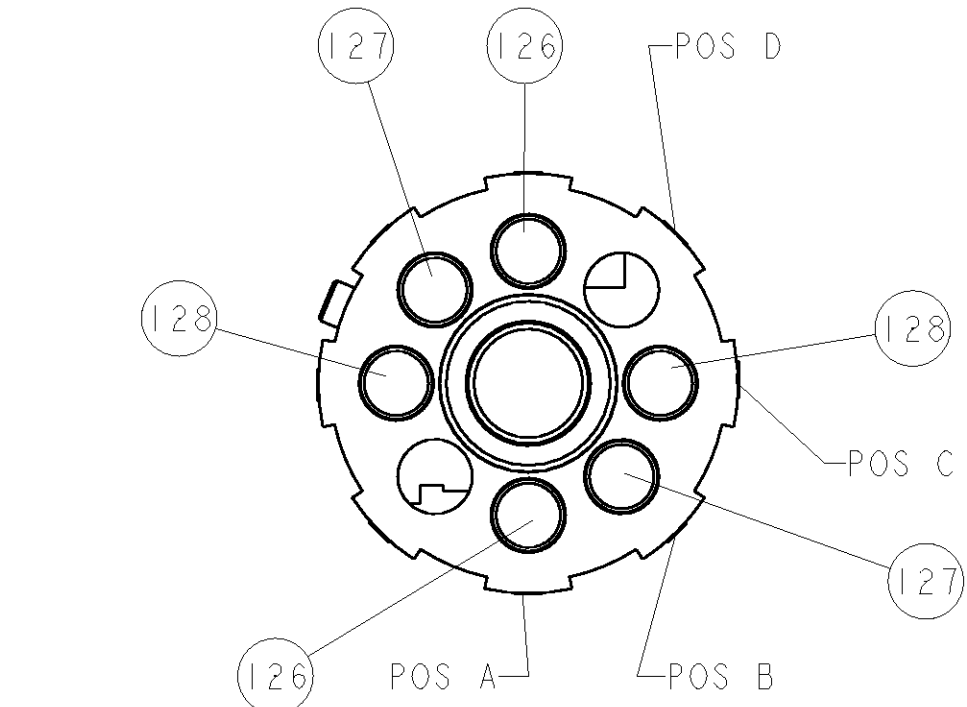


AIR FEED VALVE ASM (-2 ONLY)

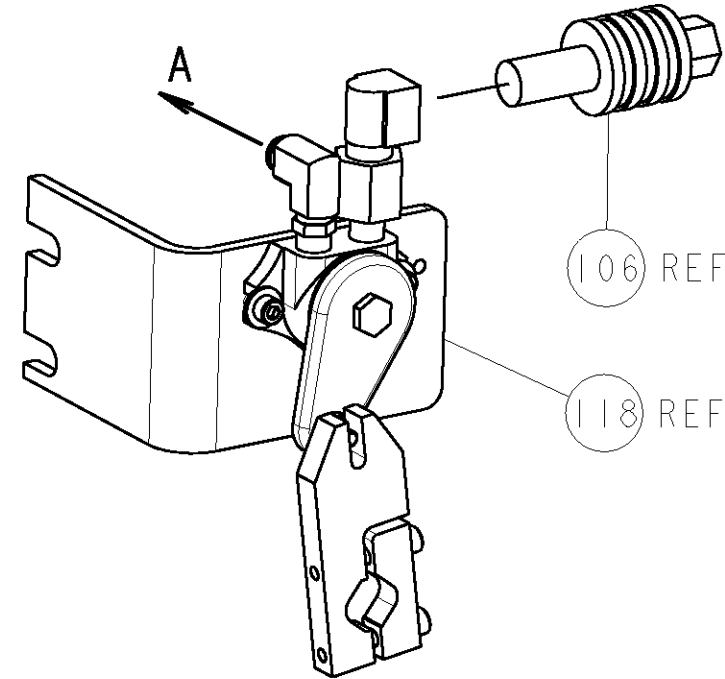

106 REF

118 REF

AMP 4805 REV 31MAR2000

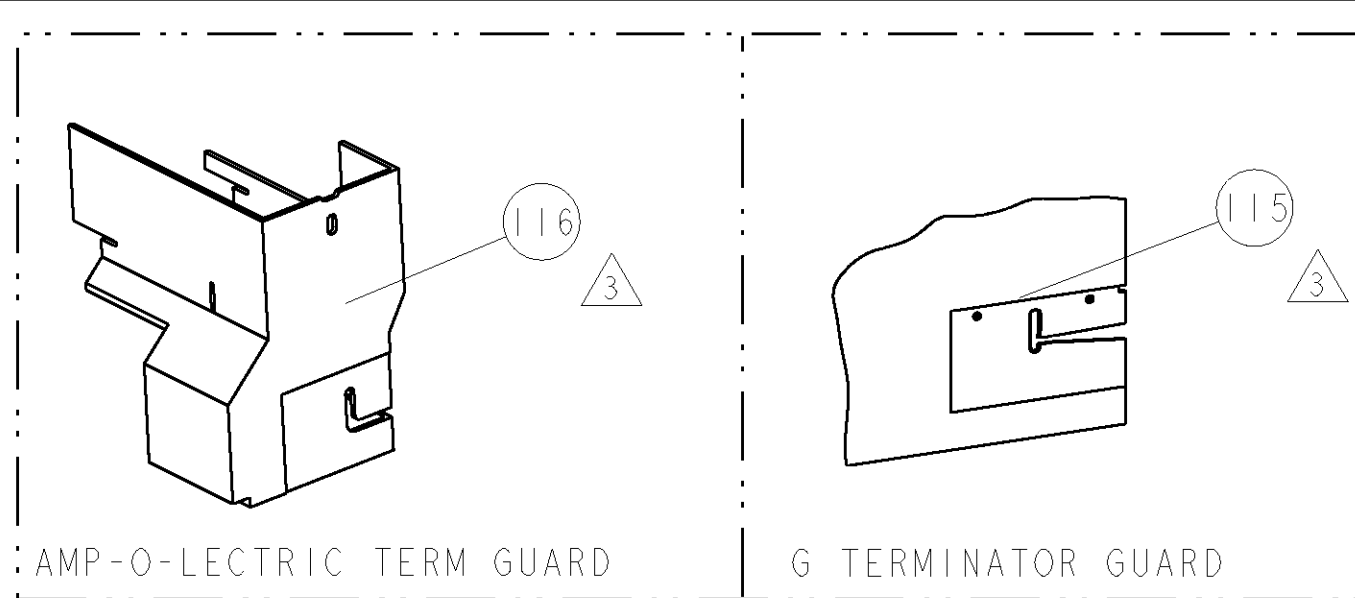


AMP-O-LECTRIC TERM GUARD

G TERMINATOR GUARD

TERMINAL NAME: RING

TE PN	-	TE TERMINAL - TE CRIMP SPECS			
61866	-				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	4.72mm+.05/- .05[.186+.002/- .002]	6AWG	
-	-	B	4.17mm+.05/- .05[.164+.002/- .002]	8AWG	
-	-	C	3.76mm+.05/- .05[.148+.002/- .002]	10AWG	
-	-	D	-	-	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	7.11mm [.280]	F	10-6 AWG
-	-	INSUL	8.64mm [.340]	F	Ø3.683 - 7.366
WIRE STRIP LENGTH 5.18-5.94	TERM APPL SPEC 114-2084	FEED 23.11	APPLICATOR INSTRUCTIONS 408-8040		SET UP GAGE 458637-1

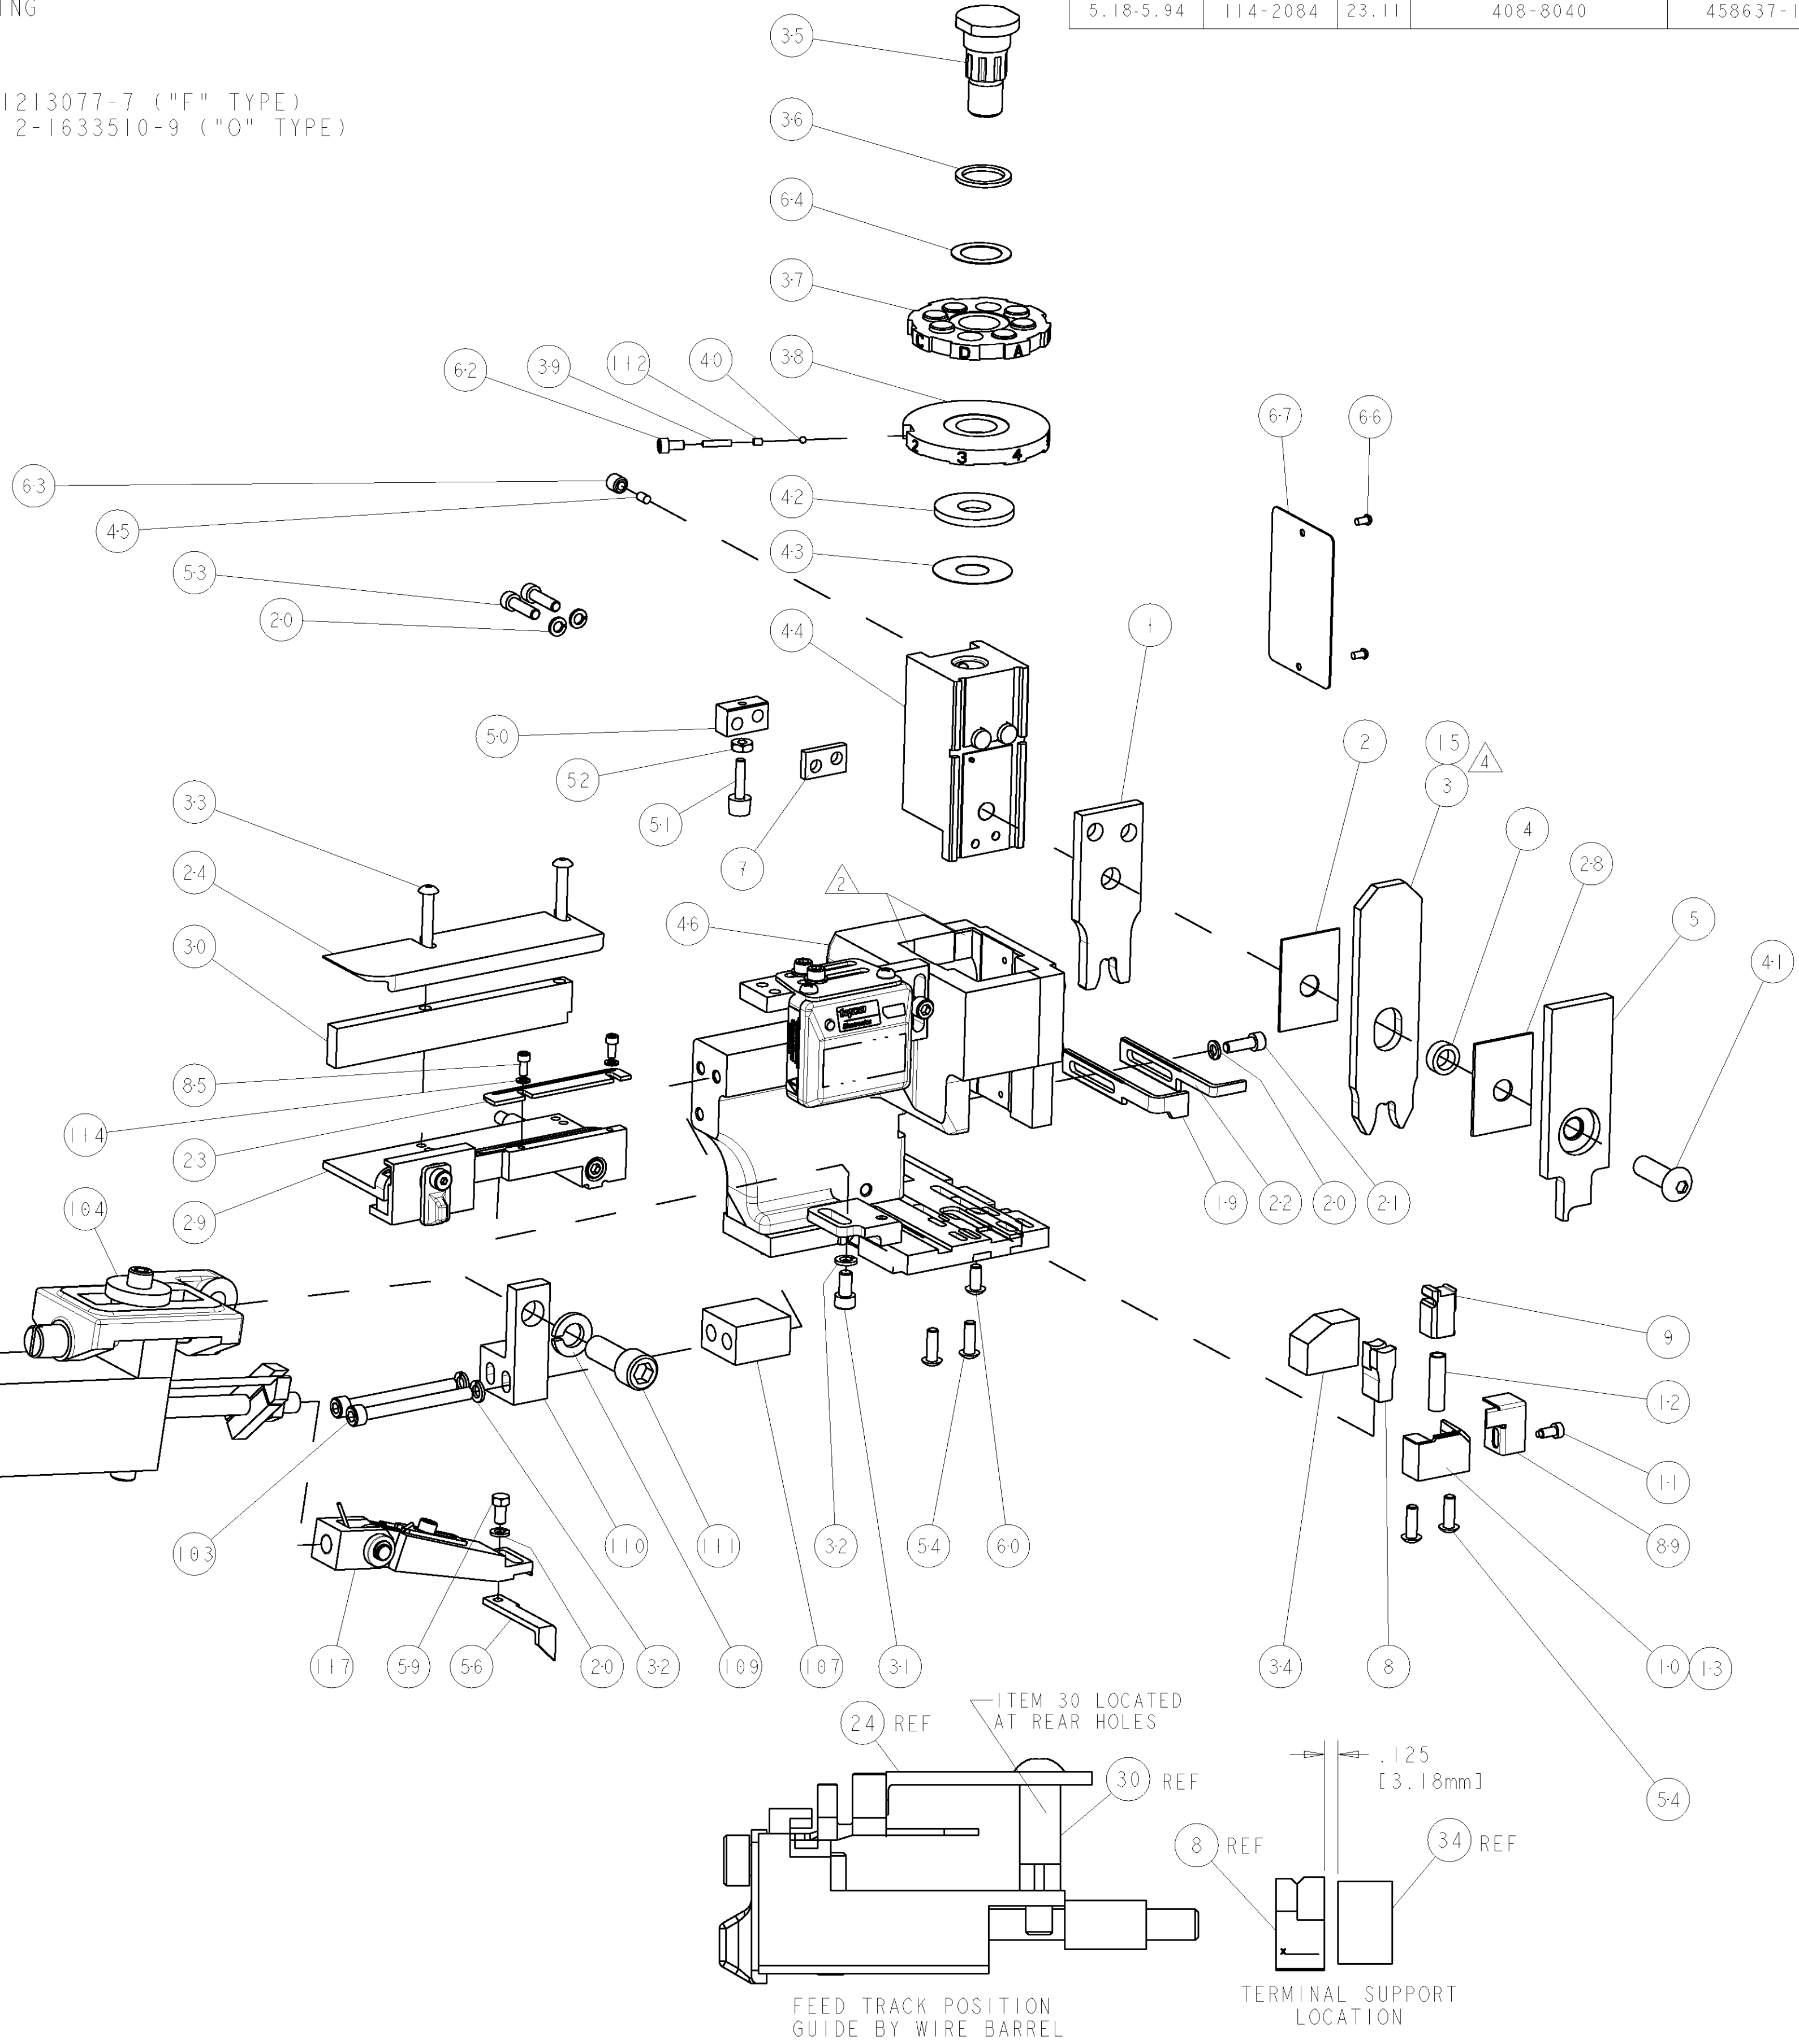

FEED TRACK POSITION GUIDE BY WIRE BARREL

TERMINAL SUPPORT LOCATION

LOC										DIST		REVISONS																			
A										66		F		LTH		DESCRIPTION										DATE		DWN		APVD	
												A				RELEASED										11SEP2008		MEH		GB	
																														</	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852734-1](#)