

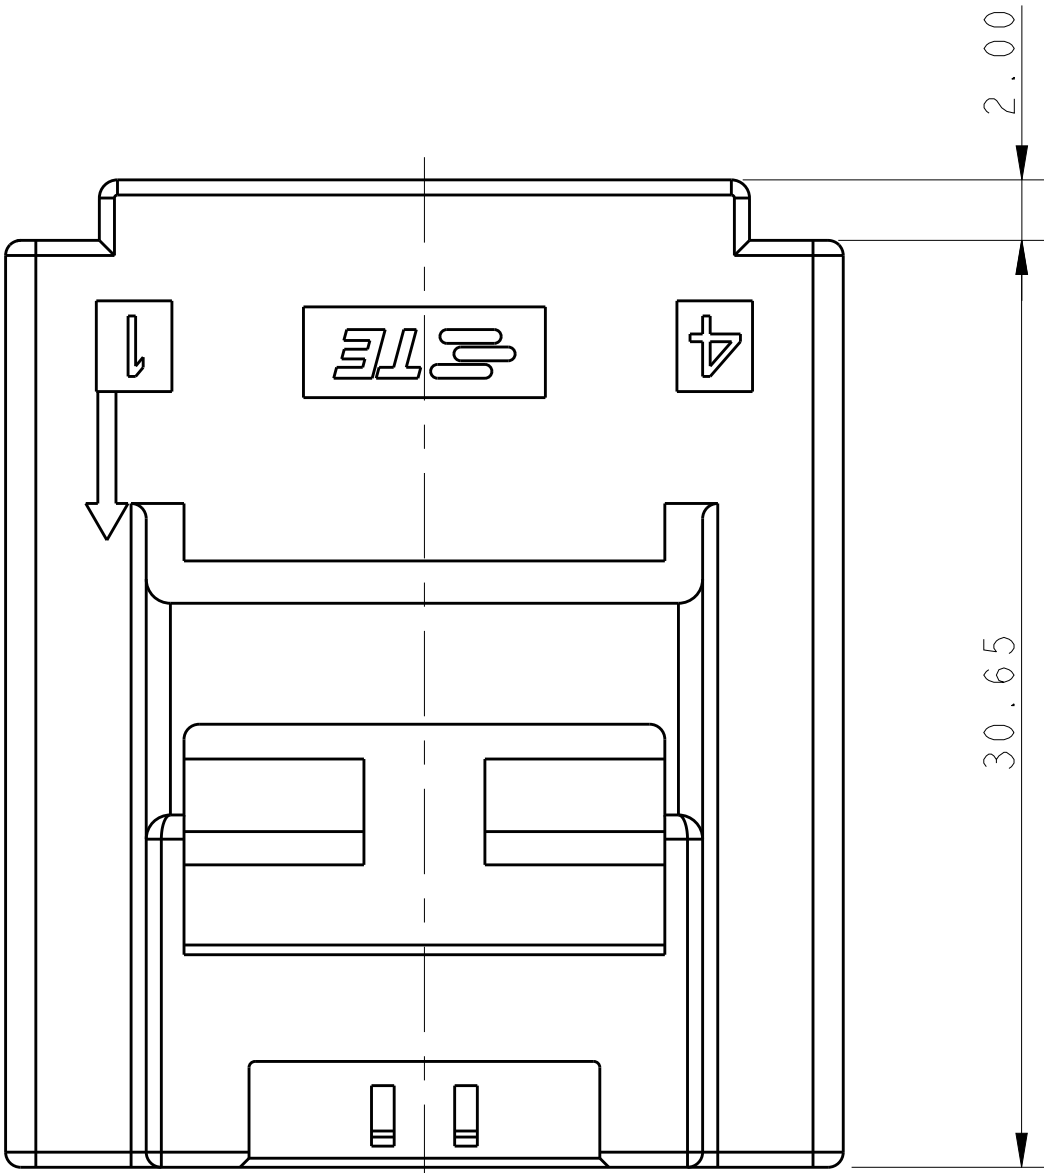
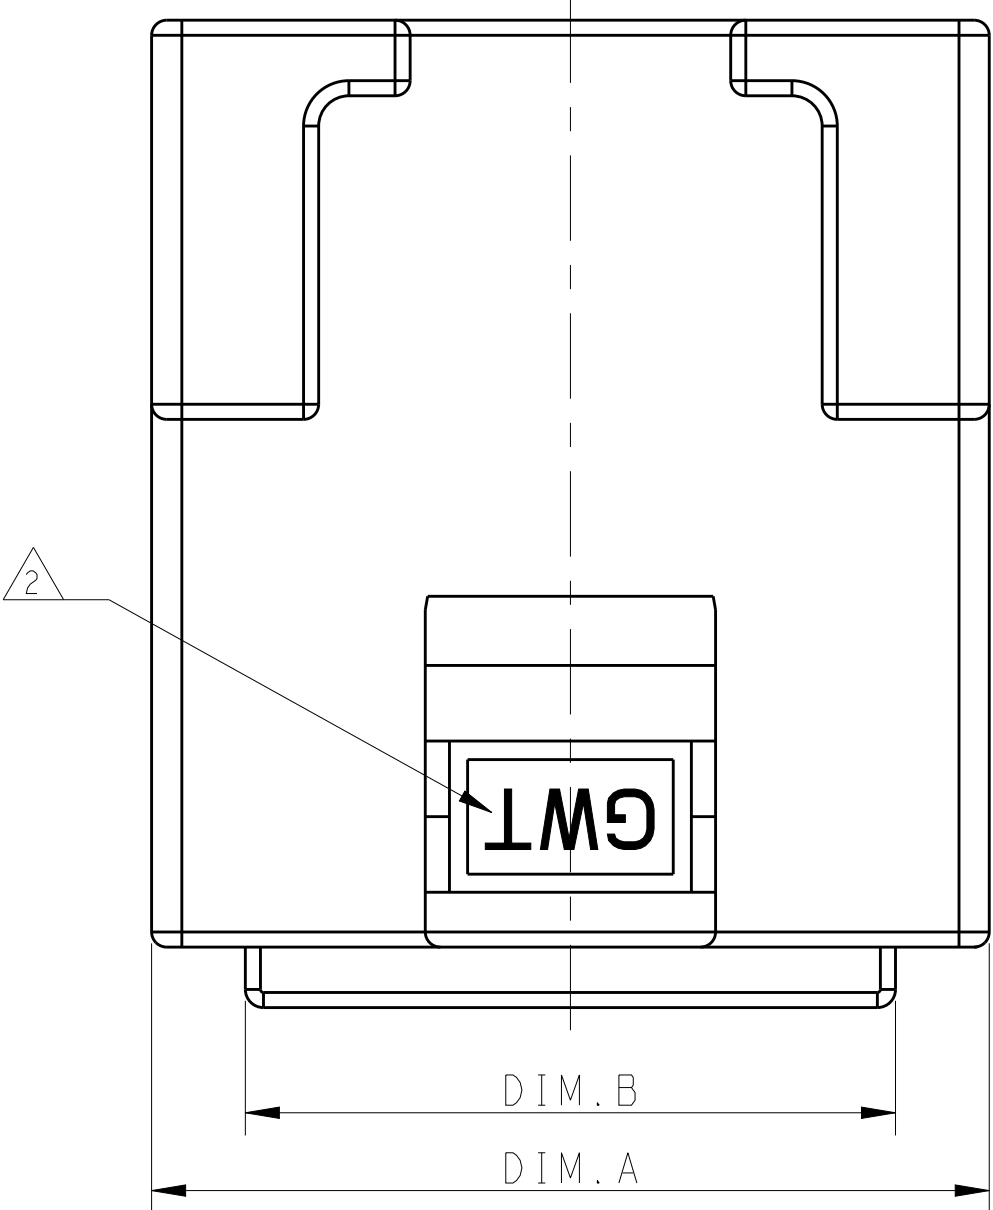
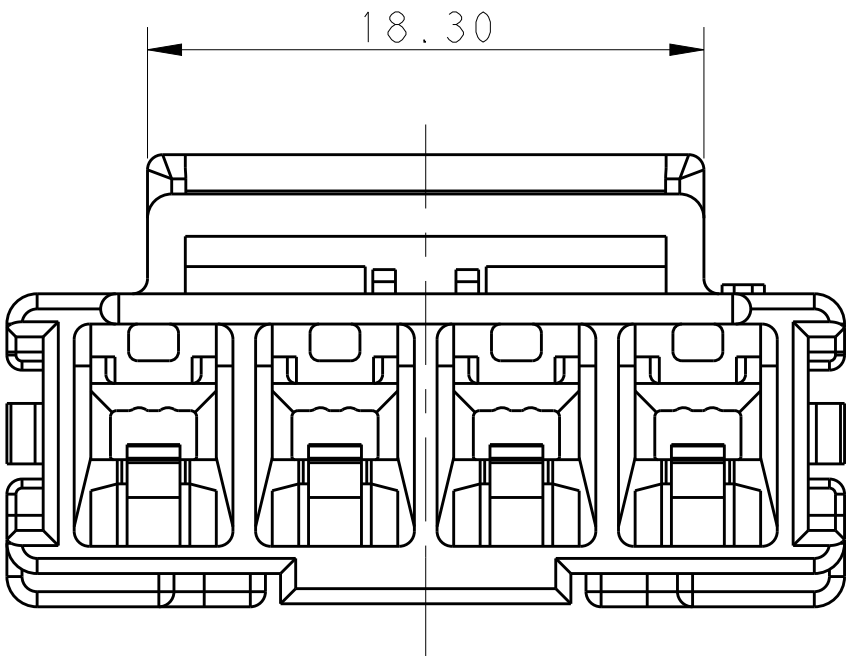


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		B	REVISED PER ECR-16-003314	18JUL2016	BW	GJ
			-	-	-	-	-

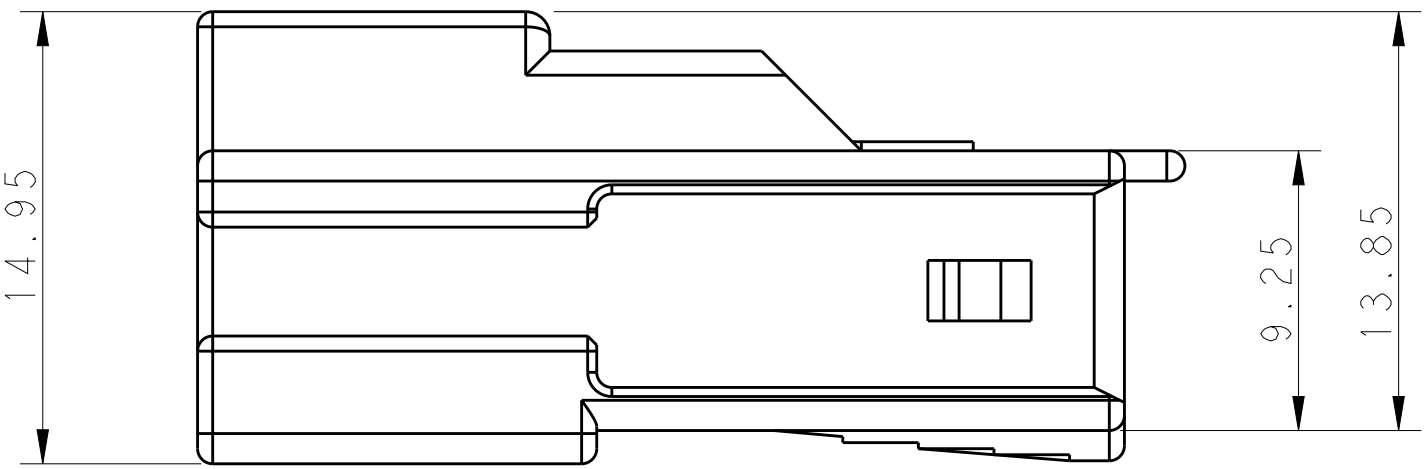


POS.	DIM.A	DIM.B	DIM.C
1*5	33.70	27.50	31.30
1*4	27.70	21.50	25.30
1*3	21.70	15.50	19.30
1*2	15.70	9.50	13.30








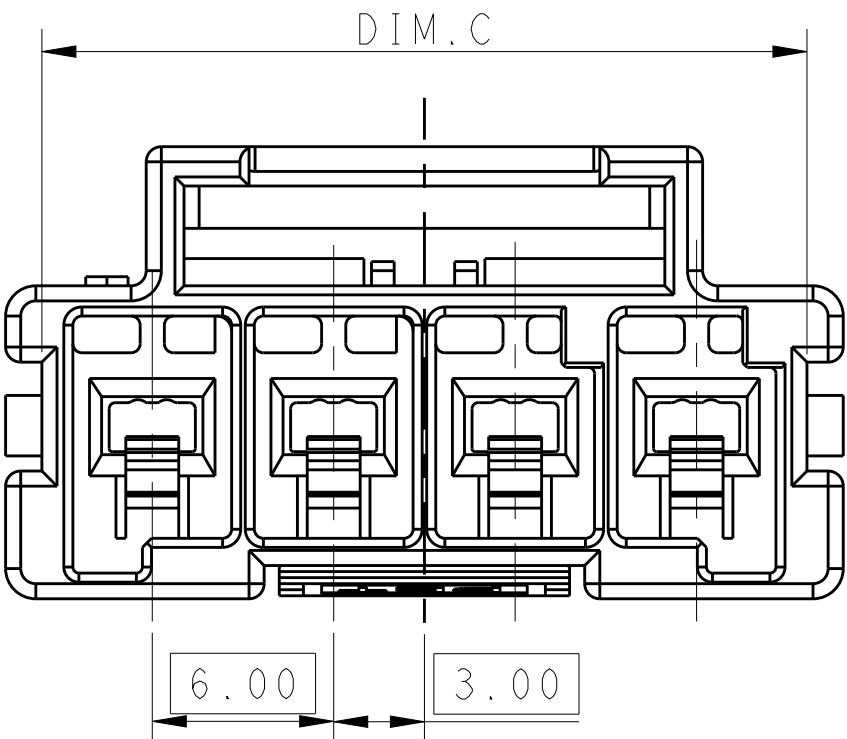


1. MATERIAL:
LEVEL A:PA6 GLASS FILLED,COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B:PBT GLASS FILLED,HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0
2. MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT
3. APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*
4. MATING CONN, P/N
PLUG HSG:*-2232265-
TPA (LOCK PLATE):*-1971777-*



5. This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 26MAR2013	 TE Connectivity		
		CHK HAPYE WU 26MAR2013			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME YUZHONG MAO 26MAR2013	
		0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ±		PRODUCT SPEC 108-106118	
		ANGLES ±		APPLICATION SPEC 114-106118	
		FINISH		SIZE A100779	
		MATERIAL		WEIGHT	CAGE CODE 2232358
		-		-	-
		Customer Drawing		RESTRICTED TO	
		SCALE		-	
		SHEET		1 OF 2	
				REV B	

LOC		DIST		REVISIONS					
				P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

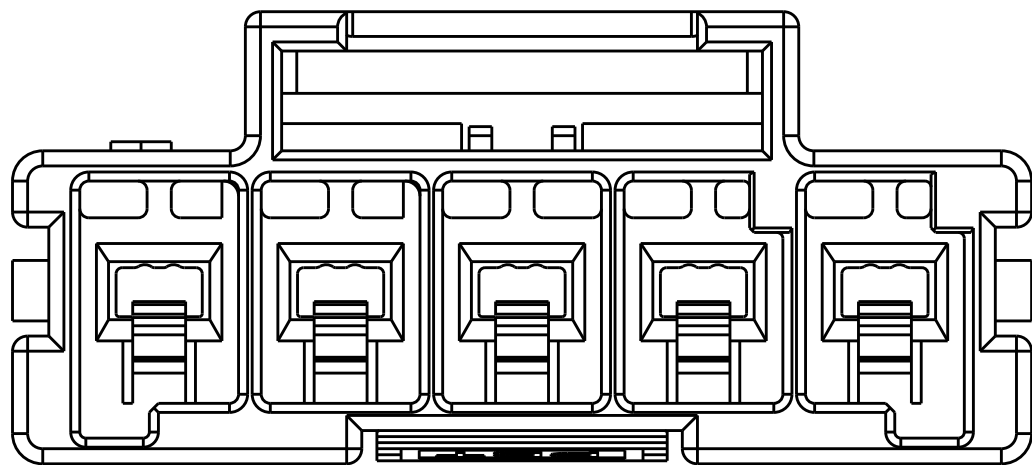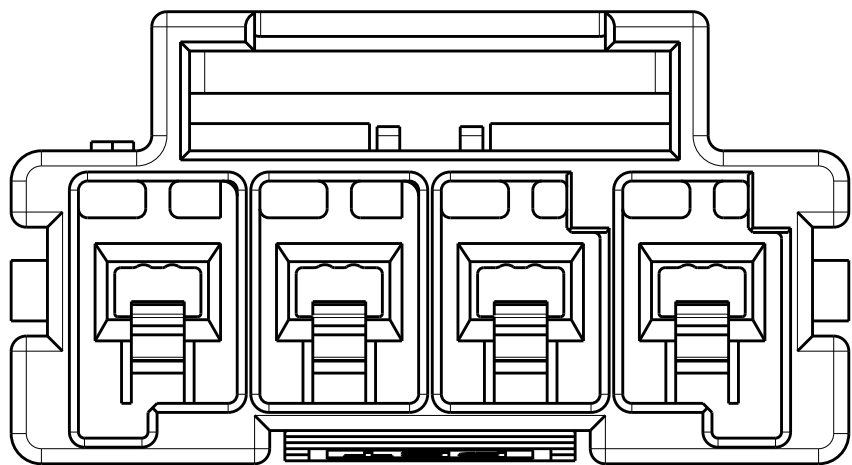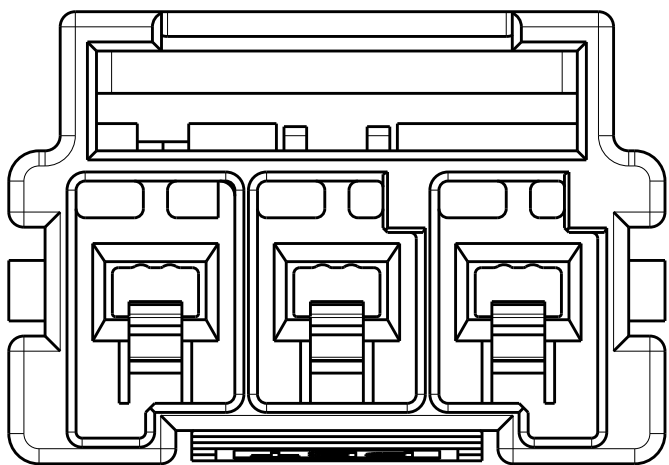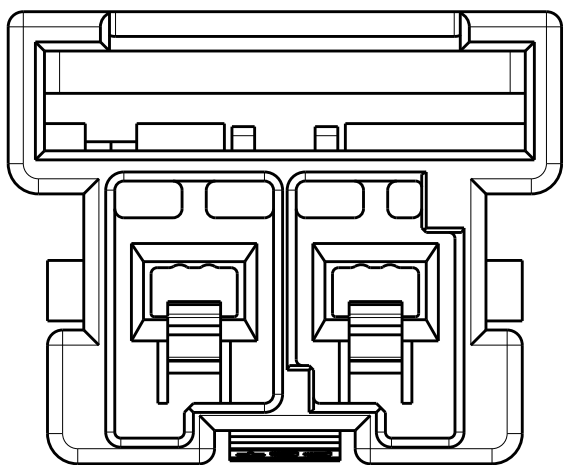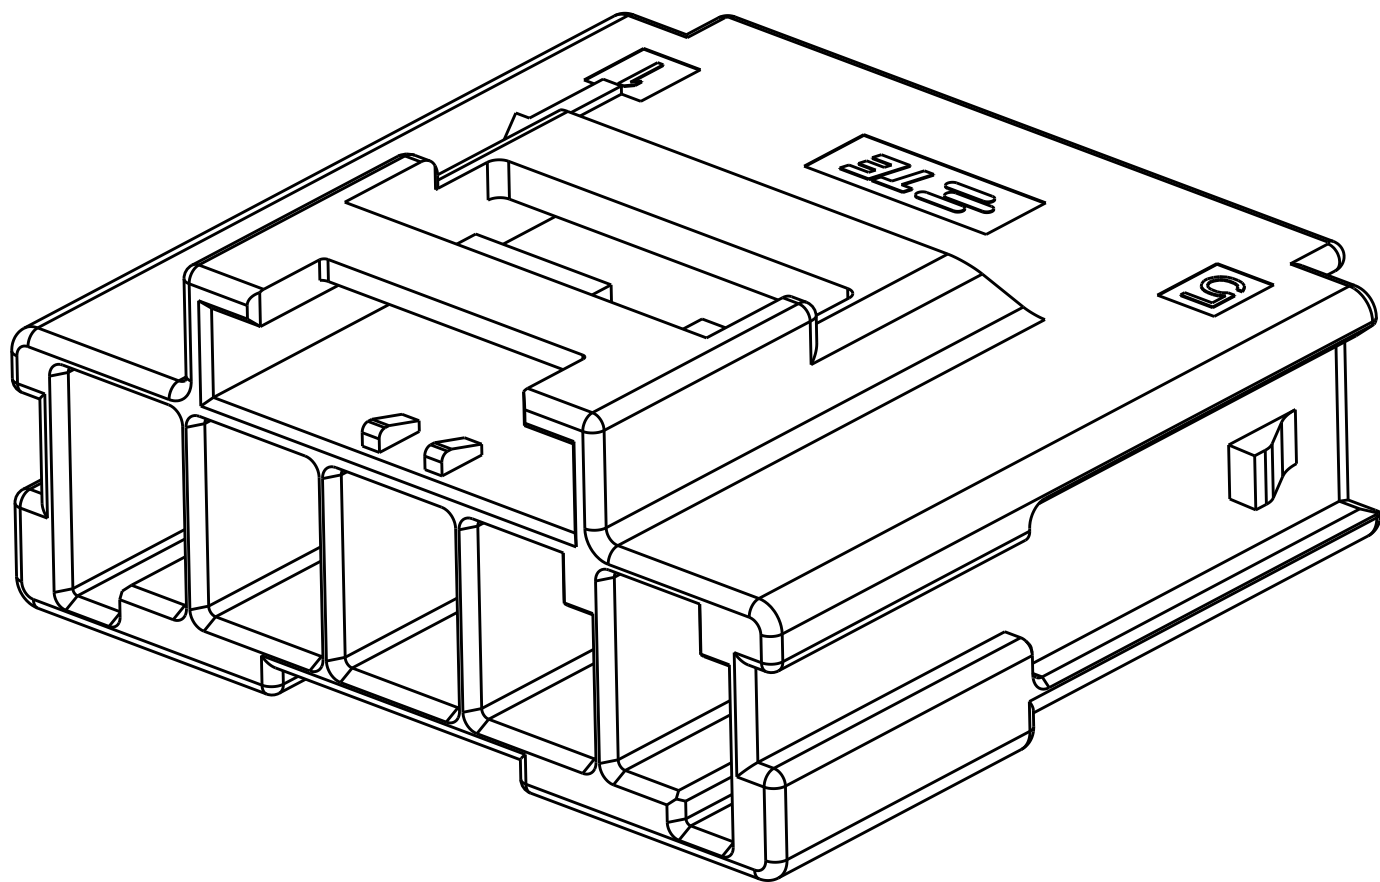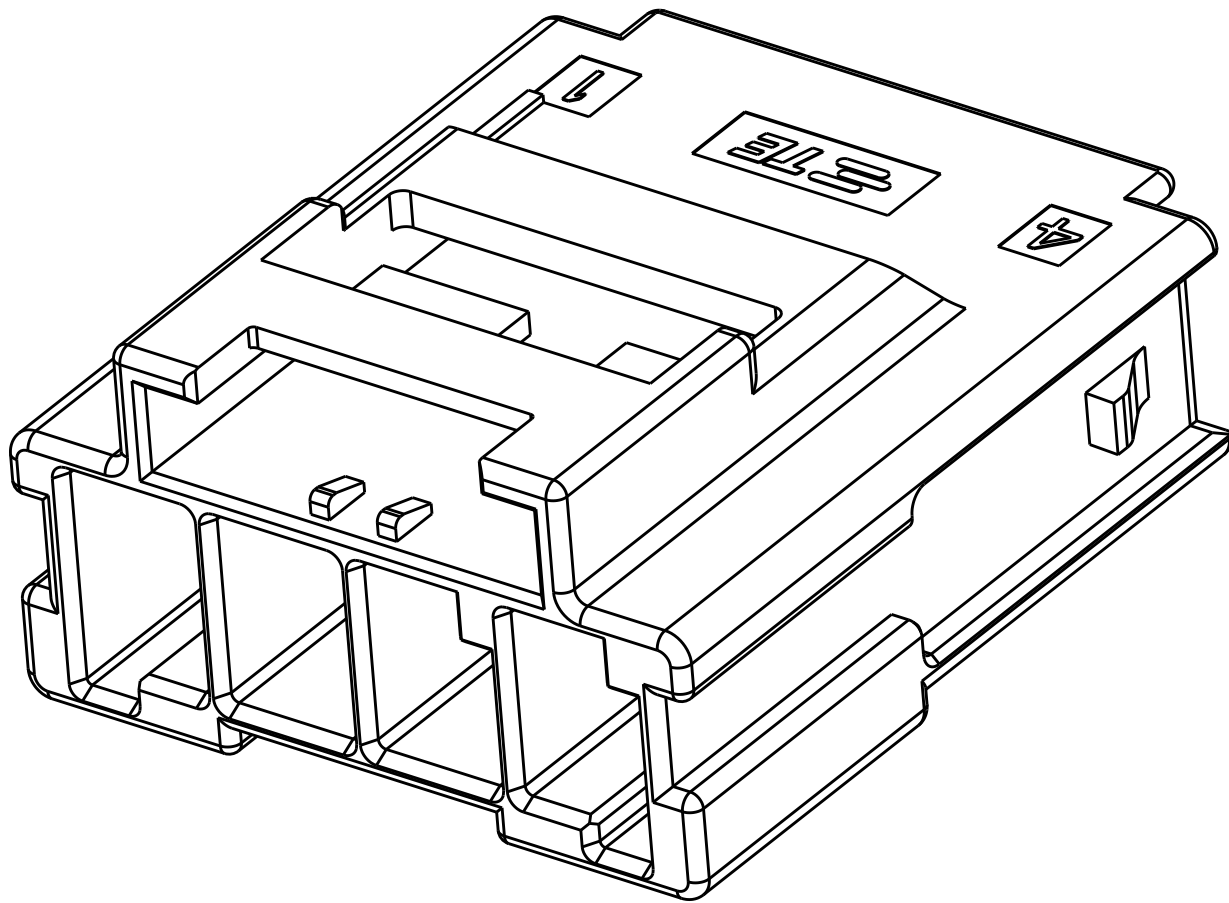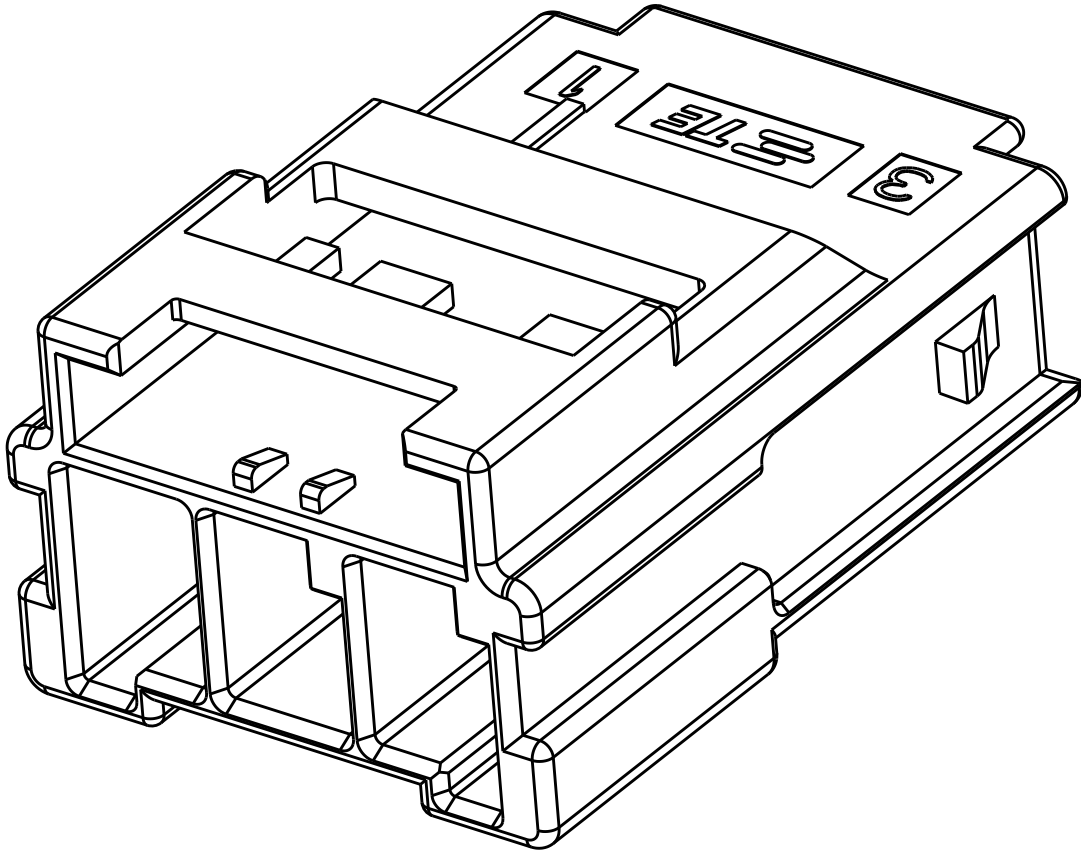
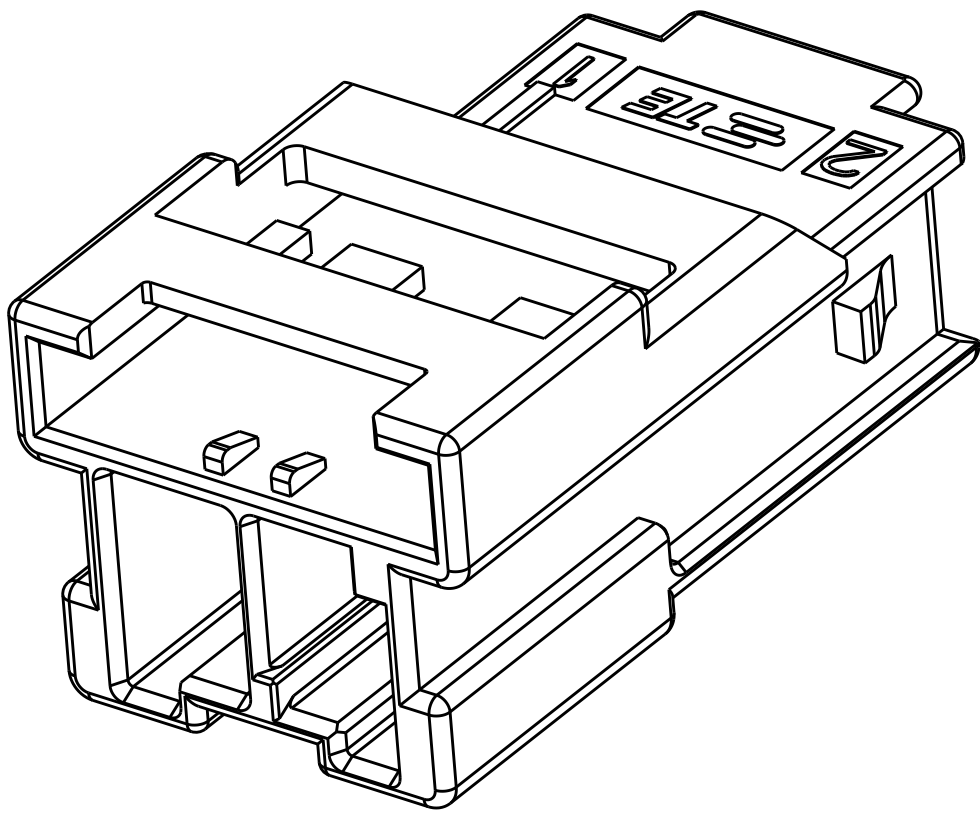


1*2 POSITIONS

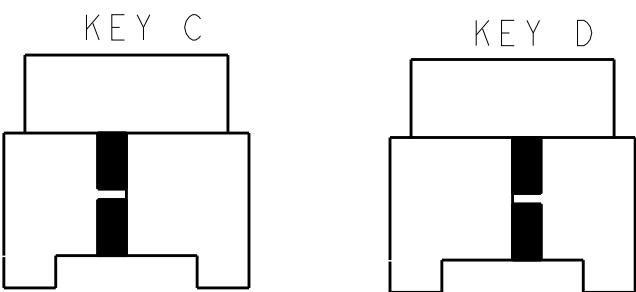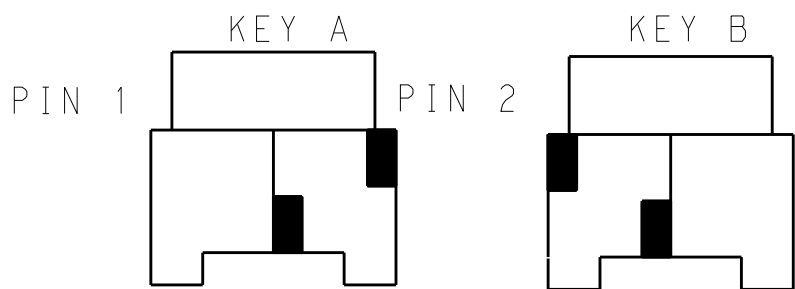



KEYING FOR 1*2 POS.

1*3 POSITIONS

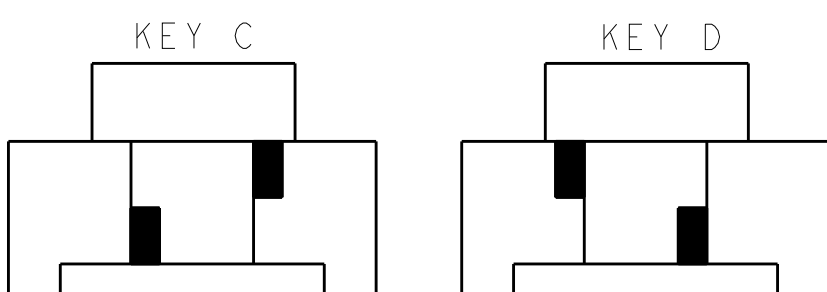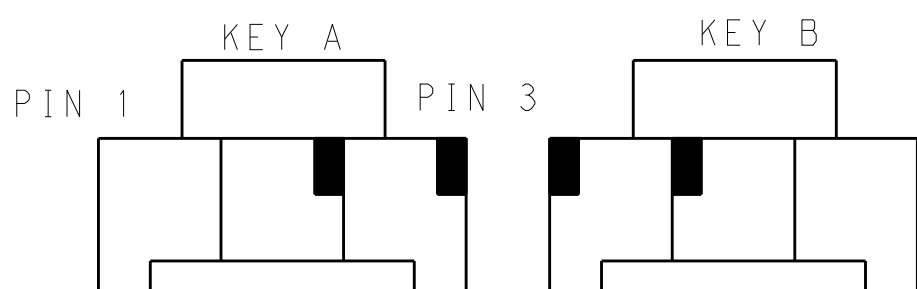



KEYING FOR 1*3 POS.

1*4 POSITIONS

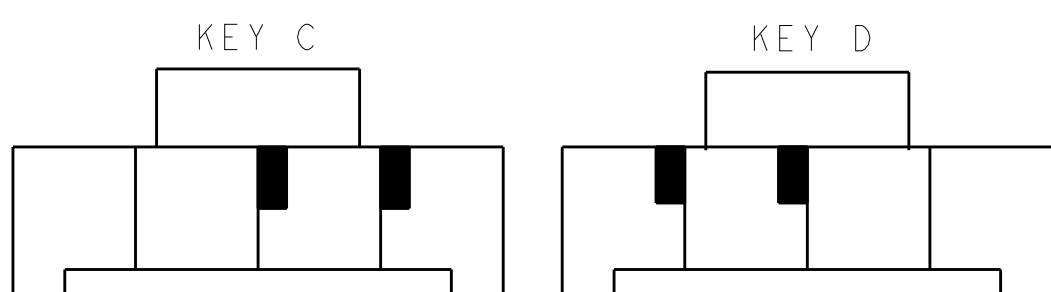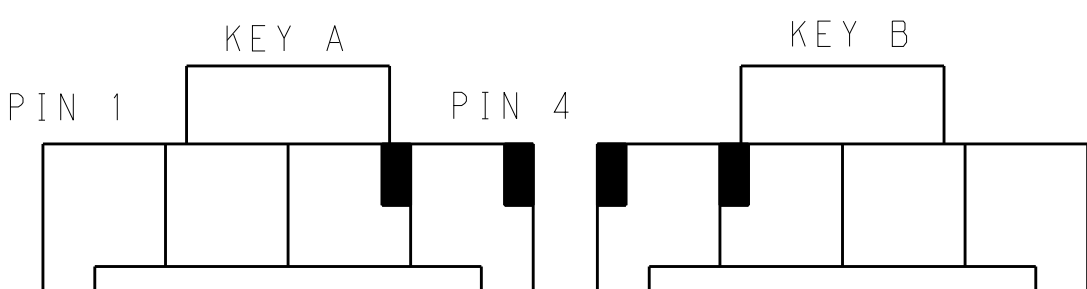

KEYING FOR 1*4 POS.

1*5 POSITIONS

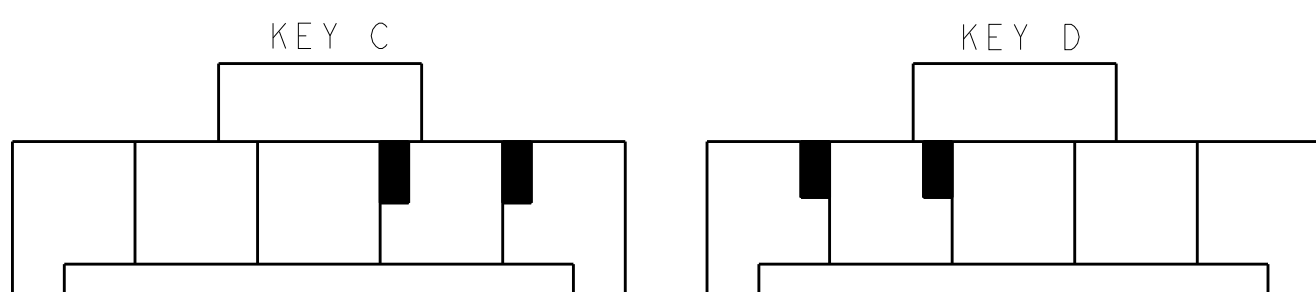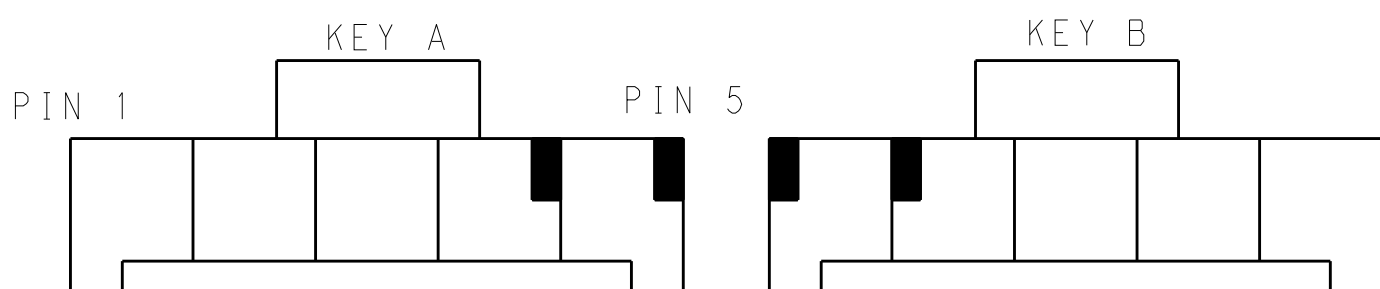

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232358-7
		BROWN	KEY B	6-2232358-7
		GREEN	KEY C	7-2232358-7
		ORANGE	KEY D	8-2232358-7
1*4	LEVEL A	DARK GREY	KEY A	5-2232358-4
		BROWN	KEY B	6-2232358-4
		GREEN	KEY C	7-2232358-4
		ORANGE	KEY D	8-2232358-4
1*3	LEVEL B	BLACK	KEY A	1-2232358-3
		DARK GREY	KEY A	5-2232358-3
		BROWN	KEY B	6-2232358-3
		GREEN	KEY C	7-2232358-3
1*2	LEVEL A	ORANGE	KEY D	8-2232358-3
		DARK GREY	KEY A	5-2232358-2
		BROWN	KEY B	6-2232358-2
		GREEN	KEY C	7-2232358-2
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN TOMMY_WU 26MAR2013		 TE Connectivity	
				CHK HAPYE_WU 26MAR2013			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD YUJHONG_MAO 26MAR2013	
mm		0 PLC ±0.35 1 PLC ±0.25 2 PLC ±0.25 3 PLC ± 4 PLC ±				NAME CAP HOUSING, FREE HANGING, SINGLE ROW POWER TRIPLE LOCK	
						PRODUCT SPEC 108-106118	
						APPLICATION SPEC 114-106118	
		ANGLES				SIZE	
		FINISH				CAGE CODE	
MATERIAL						DRAWING NO	
						RESTRICTED TO	
						A100779C=2232358	
						WEIGHT	
						Customer Drawing	
						SCALE	
						SHEET 2 OF 2	
						REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-2232358-4](#)