
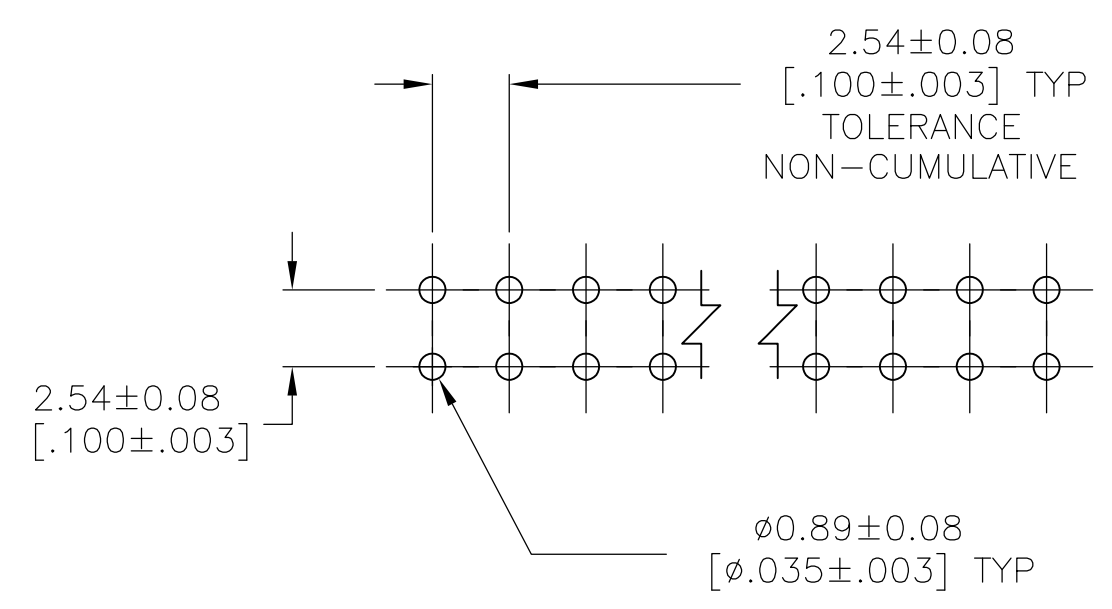
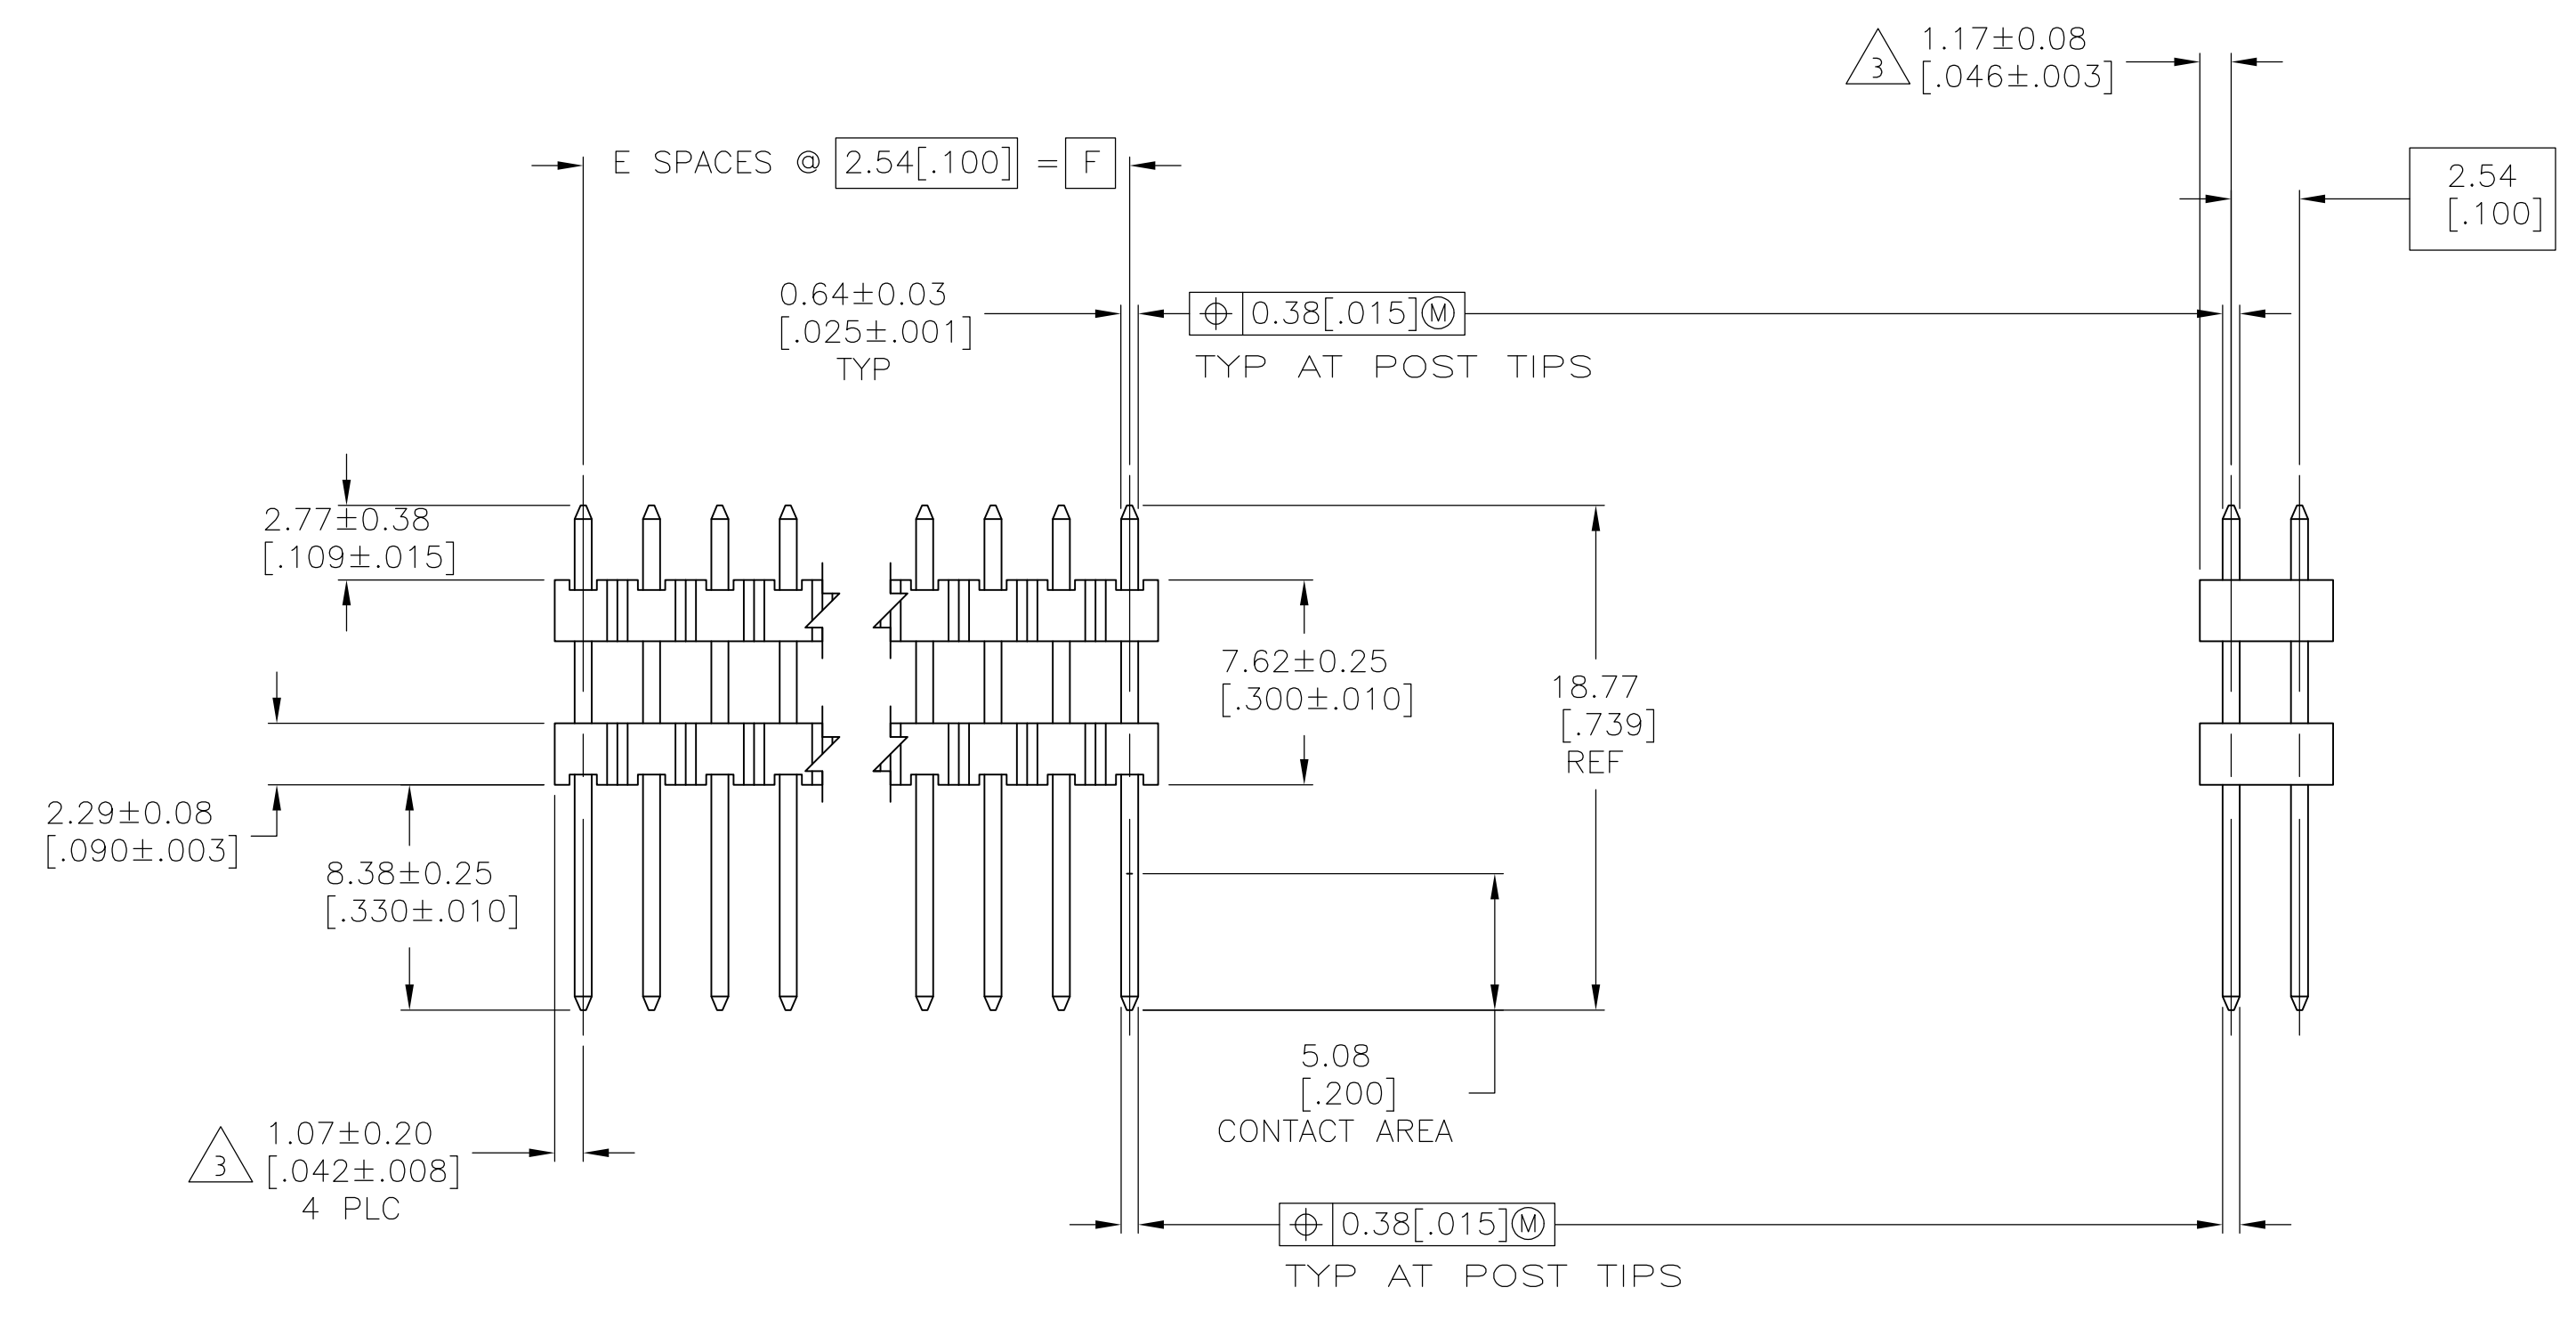


D

C

B

A

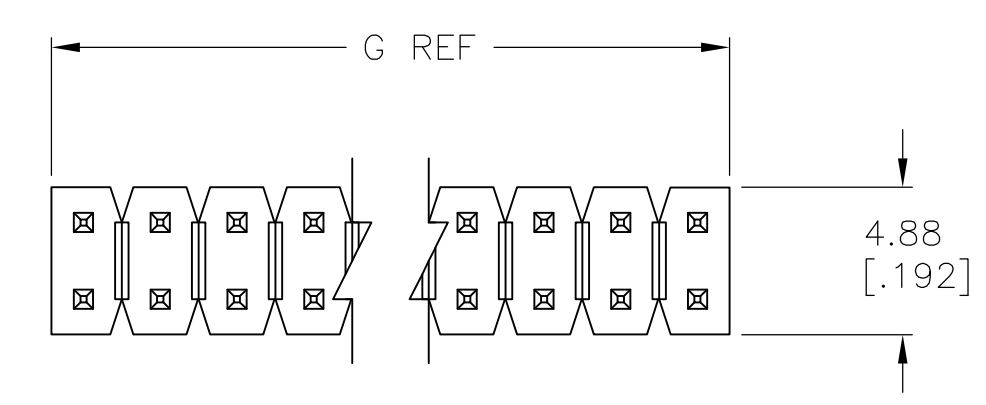

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK. CONTACT: COPPER ALLOY
- 5 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.
- 6 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R BROWN

CHK
J GEFORD

APVD
J GEFORD

19OCT2006

19OCT2006

19OCT2006

TE Connectivity

NAME
HEADER ASSEMBLY, MOD II,
STACKING, DOUBLE ROW,
.025 SQ.POST, UNSHROUDED

PRODUCT SPEC
APPLICATION SPEC

SIZE
A1

CAGE CODE
00779

DRAWING NO
146490

RESTRICTED TO
B

MATERIAL
4

FINISH
SEE TABLE

WEIGHT
—

CUSTOMER DRAWING

SCALE
4:1

SHEET
1 OF 2

REV
B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-146490-5](#)