


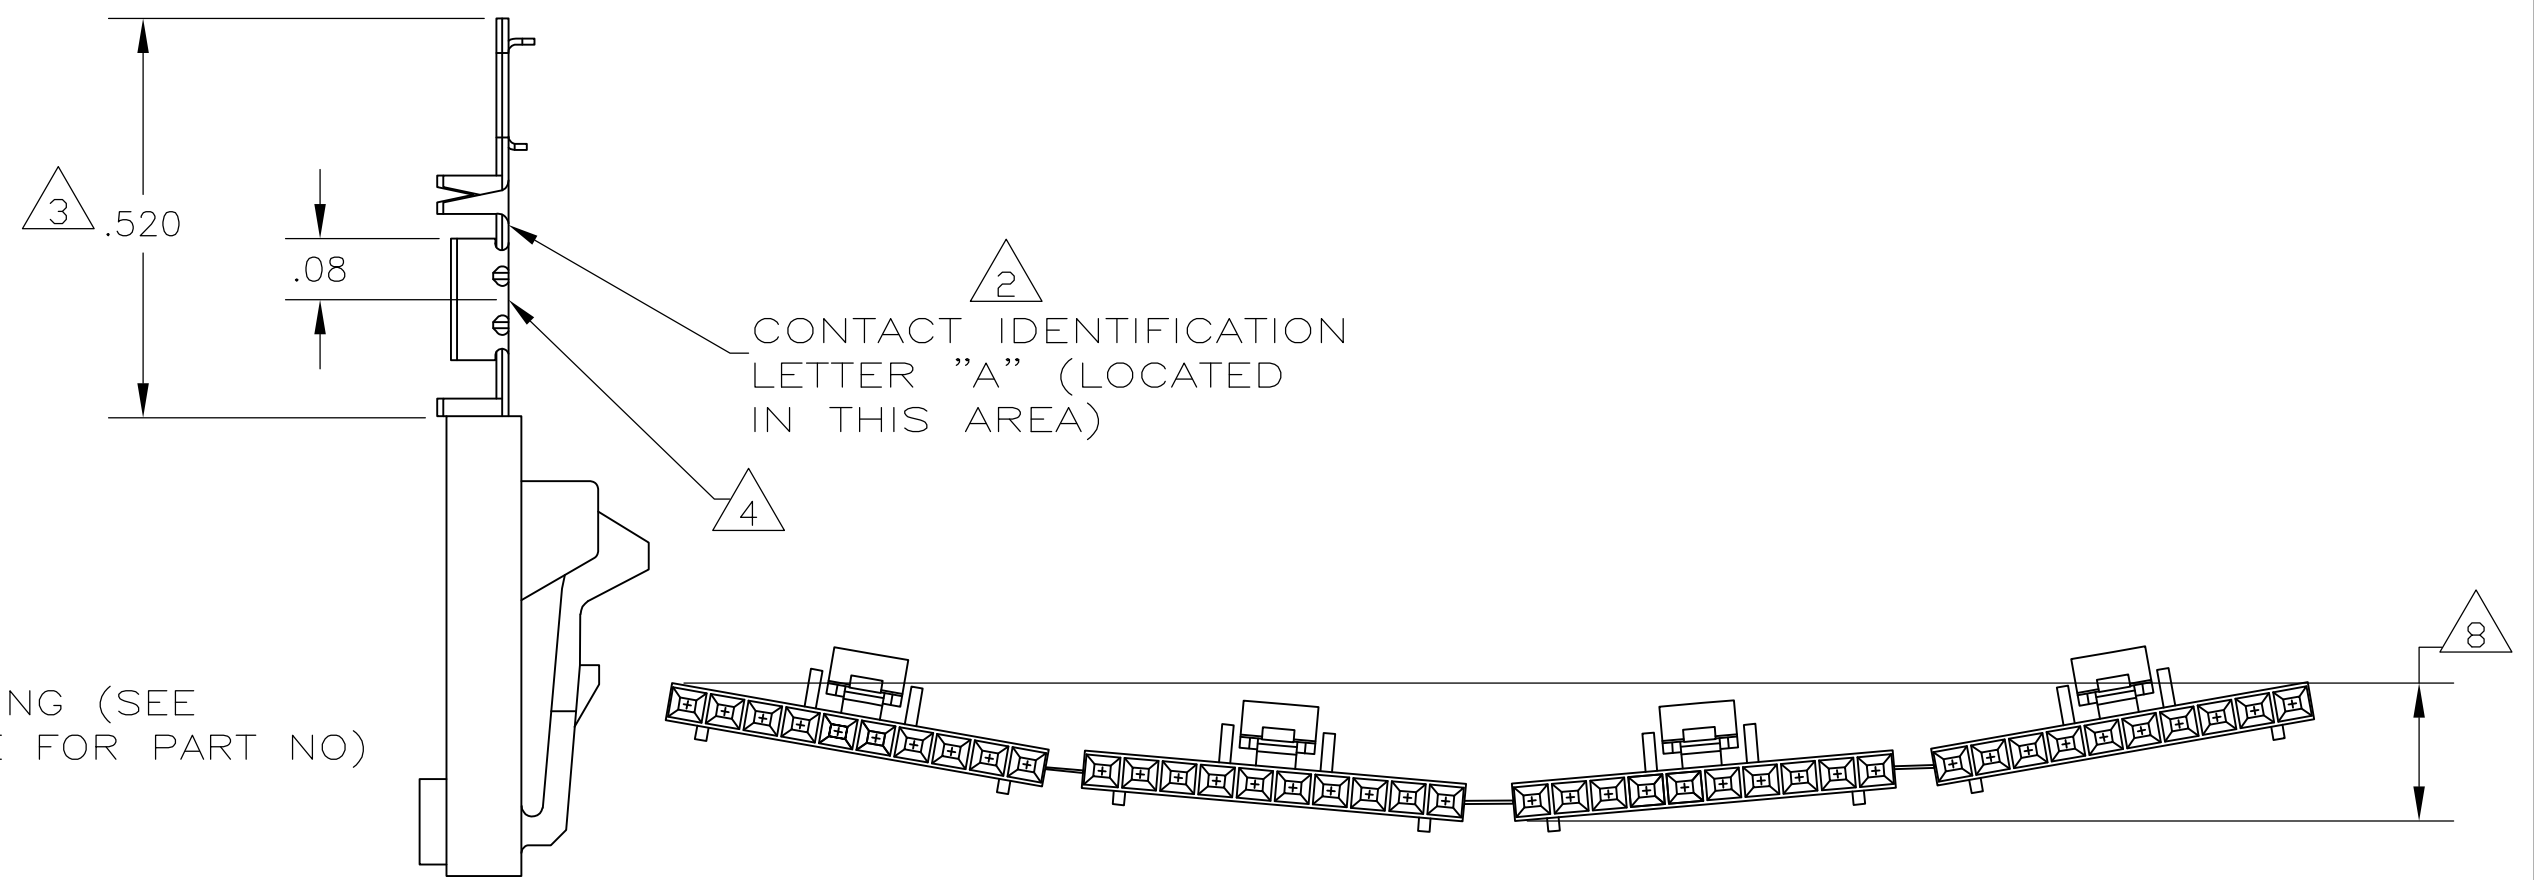

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

			2	2.40	1.198	1-104257-1	12	6-103959-1
			2	2.20	1.098	1-104257-0	1 1	6-103959-0
			2	2.00	.998	104257-9	10	5-103959-9
			2	1.80	.898	104257-8	9	5-103959-8
			2	1.60	.798	104257-7	8	5-103959-7
			2	1.40	.698	104257-6	7	5-103959-6
			4	2.39	.598	104257-5	6	5-103959-5
			4	1.99	.498	104257-4	5	5-103959-4
			5	1.99	.398	104257-3	4	5-103959-3
			8	2.40	.298	104257-2	3	5-103959-2
			10	2.00	.198	104257-1	2	5-103959-1
			5	1.99	.398	104257-3	4	1-103959-3
			4	1.99	.498	104257-4	5	1-103959-2
			2	2.40	1.198	1-104257-1	12	1-103959-1
			2	2.20	1.098	1-104257-0	1 1	1-103959-0
			2	2.00	.998	104257-9	10	103959-9
	SUPERSEDED		2	1.80	.898	104257-8	9	103959-8
			2	1.60	.798	104257-7	8	103959-7
			2	1.40	.698	104257-6	7	103959-6
			4	2.39	.598	104257-5	6	103959-5
			4	1.99	.498	104257-4	5	103959-4
			5	1.99	.398	104257-3	4	103959-3
			8	2.40	.298	104257-2	3	103959-2
			10	2.00	.198	104257-1	2	103959-1
		PLATING		B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103641
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP.
ORDER QUANTITY REFLECTS TOTAL NUMBER OF
INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE
FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000100-.000200 BRIGHT TIN-LEAD OVER .000050
NICKEL.
- 10 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 13 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11-4-86		 TE Connectivity	
		CHK L A MAYER 11-12-86			
DIMENSIONS: INCHES		APVD P de Jong 11-12-86		NAME	
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± -		RCPT ASSY, AMPMODU MTE, SINGLE ROW .100 C/L, LATCHED AND POLARIZED FOR #26-#30 AWG WIRE SIZE, STRIP FORM	
MATERIAL		PRODUCT SPEC 108-25034		SIZE	RESTRICTED TO
HOUSING:		APPLICATION SPEC 114-25026		CAGE CODE	
FINISH		WEIGHT -		DRAWING NO	
		A2		00779	
		CUSTOMER DRAWING		C-103959	
		SCALE		SHEET	REV
		4:1		1 of 1	M2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103959-2](#)