


Total hight of 3.1mm. Surface mount package with ground terminal



### ■ Typical Specifications

Items	Specifications
Rating (max.)	50mA 12V DC
Rating (min.)	10μA 1V DC
Initial contact resistance	100mΩ max.
Travel (mm)	0.25

### ■ Product Line

Product No.	Operating force	Operating direction	Operating life (5mA 5V DC)	Stem color	Minimum order unit (pcs.)	
					Japan	Export
<b>SKHMQKE010</b>	0.98N	Top push	500,000 cycles	Black	3,000	3,000
<b>SKHMQLE010</b>	1.57N		300,000 cycles	Green		
<b>SKHMQME010</b>	2.35N		200,000 cycles	Red		


### ■ Packing Specifications

#### Taping

Number of packages (pcs.)			Tape width (mm)	Export package measurements (mm)
1 reel	1 case / Japan	1 case / export packing		
3,000	30,000	30,000	12	395×395×205

#### Note


For reels of 330mm diameter, please inquire.

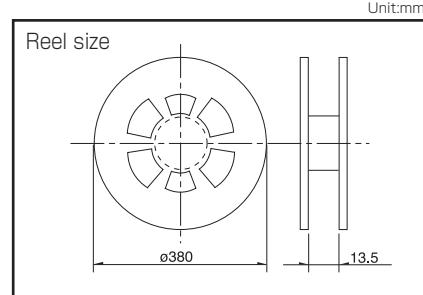

### ■ Dimensions

Style	PC board land dimensions (Viewed from switch mounting face)

### ■ Circuit Diagram

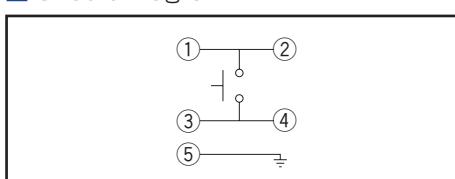

Refer to P.265 for soldering conditions.

Type	Sharp Feeling Type																				
	Surface Mount																				
Series	SKRK	SKTH	SKRP	SKQM	SKQY	SKSU	SKST	SKRA	SKHM												
Photo																					
Features	Compact size Low-profile	Compact size	High operation force Compact size	Compact size		Middle travel			—												
Water-proof	—	—	—	—	—	●	—	○	—												
Dust-proof	—	●	—	—	—	●	—	○	—												
IP standard	—	—	—	—	—	67 equivalency	—	67 equivalency	—												
Operating direction	Top push	●	●	●	●	●	●	●	●												
	Side push	—	—	—	—	—	—	—	—												
Dimensions (mm)	W	3.9	3.5	4.2	6	6.1	5.3	8.5	□6.2												
	D	2.9	3.2	3.2	3.5	3.7	5.4														
	H	1.5/2	1.8/2.5	2.5	4.3/5	2.5	3.85	3.95	3.5/5.2												
Operation force coverage	1N max.																				
	1N to 2N																				
	2N to 3N																				
	3N to 4N																				
	4N to 5N																				
Travel (mm)	0.13	0.12	0.2	0.25		0.7	0.9	See the relevant pages for respective product descriptions	0.25												
Ground terminal	—	—	—	—	○	—	—		●												
Operating temperature range	-40°C to +85°C																				
-40°C to +90°C		-40°C to +90°C																			
Automotive use		—	●	●	●	●	●	○	—												
Life Cycle																					
Electrical performance	Rating (max.) (Resistive load)	50mA 12V DC	25mA 16V DC	50mA 16V DC	50mA 12V DC		50mA 16V DC		50mA 12V DC												
	Rating (min.) (Resistive load)	10μA 1V DC																			
	Insulation resistance	100MΩ min. 100V DC 1min.																			
	Voltage proof	250V AC 1min.	100V AC 1min.	250V AC 1min.																	
Durability	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively																			
	Lifetime	Shall be in accordance with individual specifications.																			
Environmental performance	Cold	-40°C 96h		-40°C 1,000h	-40°C 96h		-40°C 1,000h		-40°C 96h												
	Dry heat	90°C 96h		90°C 1,000h	90°C 96h		90°C 1,000h		90°C 96h												
	Damp heat	60°C, 90 to 95%RH 96h		60°C, 90 to 95%RH 1,000h	60°C, 90 to 95%RH 96h		60°C, 90 to 95%RH 1,000h		60°C, 90 to 95%RH 96h												
Page		230	232	234	235	236	238	239	240	241											

W : Width. The most outer dimension excluding terminal portion.  
D : Depth. The most outer dimension excluding terminal portion.  
H : Height. The minimum dimension if there are variances.

TACT Switch™ Soldering Conditions	265
TACT Switch™ Cautions	266


## Notes

1. The automotive operating temperature range to be individually discussed upon request.  
2. ● Indicates applicability to all products in the series, while ○ indicates applicability to some products in the series.

## Condition for Reflow

Available for Surface Mount Type.

1. Temperature measurement: Thermocouple  $\phi$  0.1 to 0.2 CA (K) or CC (T) at solder joints (copper foil surface).  
A heat resistive tape should be used to fix thermocouple.
2. Temperature profile

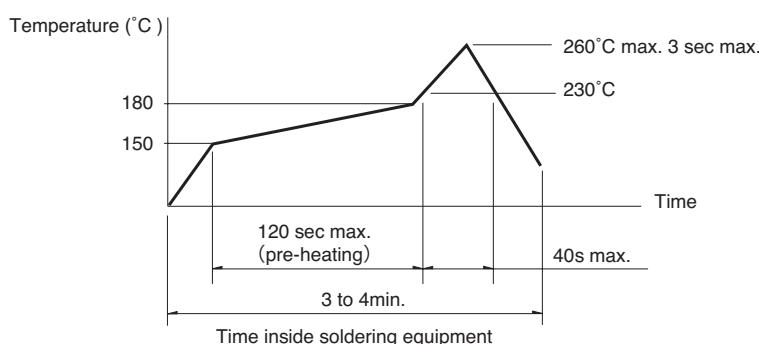

### Notes

1. The above temperature shall be measured of the top of switch. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the material, size, thickness of PC boards and others.

The above-stated conditions shall also apply to switch surface temperatures.

2. Soldering conditions differ depending on reflow soldering machines.

Prior verification of soldering condition is highly recommended.

## Conditions for Auto-dip

Available for Snap-in Type and Radial Type.

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 100°C max.
Preheating time	60s max.
Soldering temperature	260°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

### SKHH, SKPD Series

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 110°C max.
Preheating time	60s max.
Soldering temperature	260°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

### SKQJ, SKQK, SKEG Series

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 100°C max.
Preheating time	45s max.
Soldering temperature	255°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

### Notes

1. Prevent flux penetration from the top side of the TACT Switch™.
2. Switch terminals and a PC board should not be coated with flux prior to soldering.
3. The second soldering should be done after the switch is stable with normal temperature.
4. Use the flux with a specific gravity of min 0.81.  
(EC-19S-8 by TAMURA Corporation, or equivalents.)

## Manual Soldering

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	60W max.

### SKHH, SKHW, SKRG, SKPD Series

Items	Condition
Soldering temperature	360°C max.
Duration of soldering	3s max.
Capacity of soldering iron	60W max.

### SKTD, SKTG, SKQJ, SKQK, SKEG Series

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	20W max.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ALPS:

[SKHMQKE010](#) [SKHMQLE010](#) [SKHMQME010](#) [SKHMQLG020](#) [SKHMQMG020](#) [SKHMQKG020](#)