
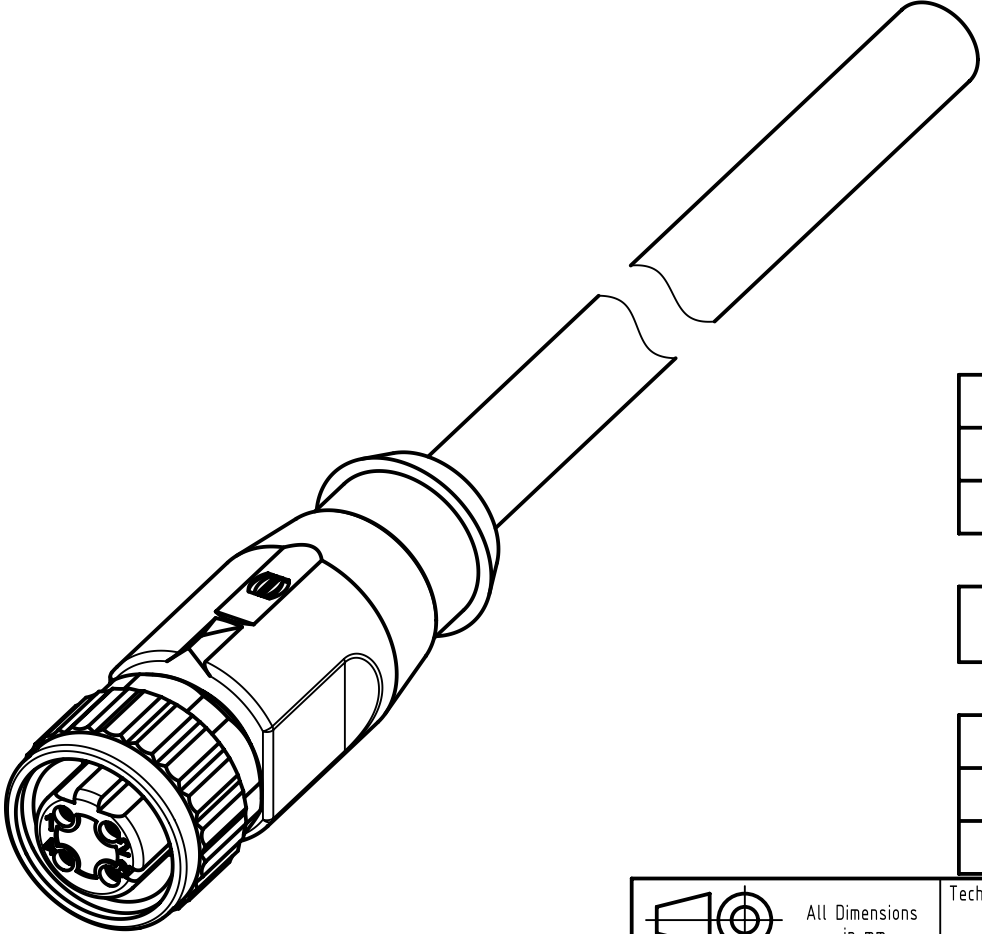
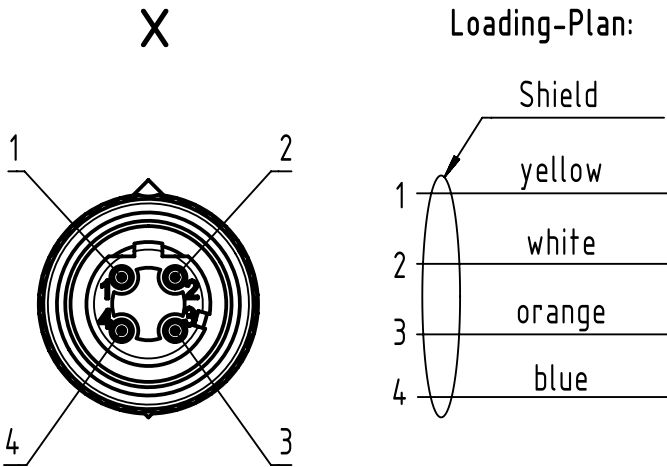


Connector Location A

Connector Location B

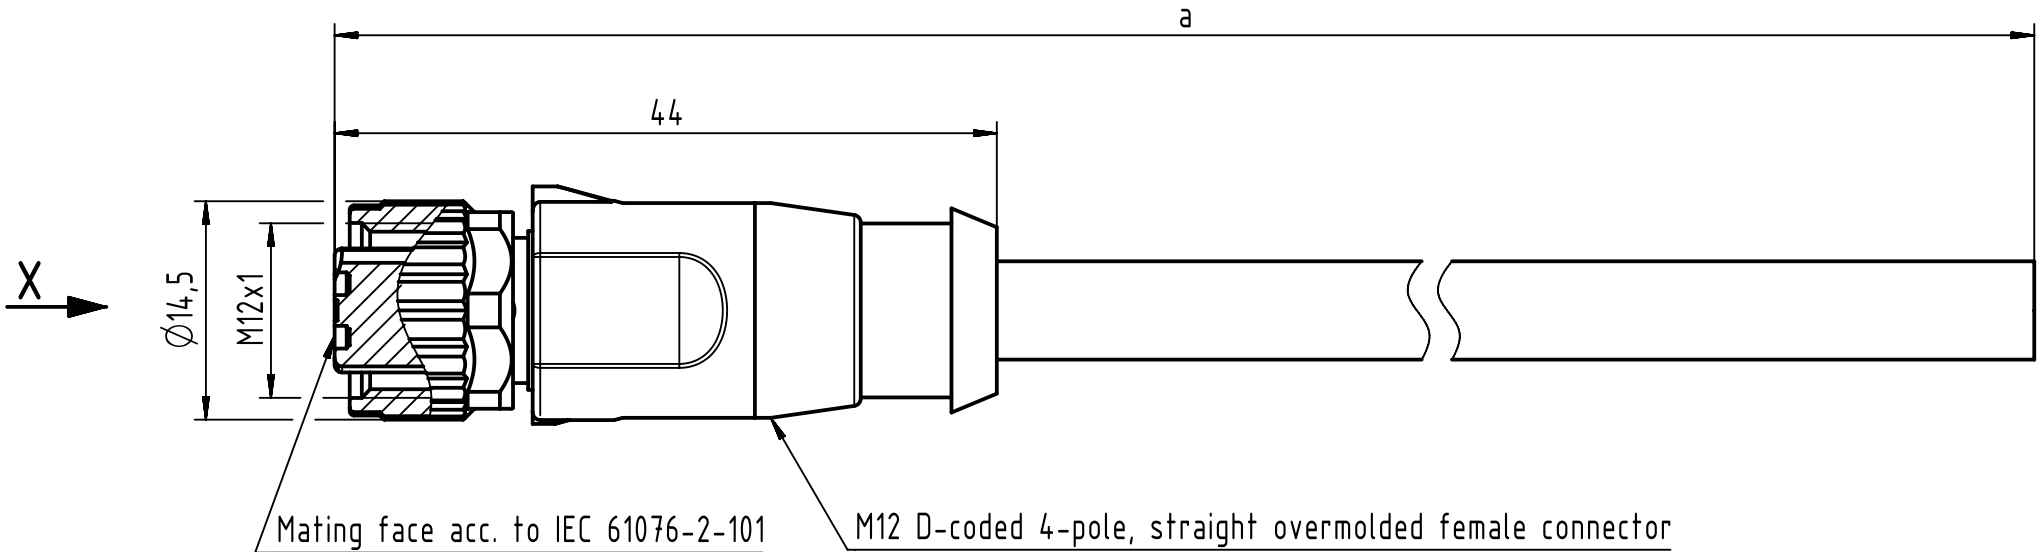

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 100	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213493004XXXXX
----------	----------------

Type of cable	XX
PVC, green, 4xAWG22/7	XX=05
PUR, green, 2x2xAWG22/7	XX=77

- Protection level: IP67
- Temperature range: -30°C ... +70°C

 All rights reserved Department HCS - RO	Tech. Character.	Free size tol.	According to production drawing
Created by MUNTEANV	Inspected by POPESCU	Standardisation AVRAM	Date 2017-04-06
Title M12 D-coded Cable Assembly	Doc-Key / ECM-Nr. 100588482/UGD/000/C 500000117781	State Final Release	
Type TB	Number 213493004XXXXX	Rev. C	Page 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21349300405010](#) [21349300477020](#) [21349300477075](#) [21349300405005](#) [21349300405015](#) [21349300405100](#)
[21349300477010](#) [21349300477015](#) [21349300477100](#) [21349300405050](#) [21349300405075](#) [21349300477050](#)
[21349300477005](#) [21349300405020](#)