


COIL: @ +25°C
 RESISTANCE 1030 Ω ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 11.4 VDC
 MUST RELEASE 1.1 VDC

CUSTOMER DATA SHEET

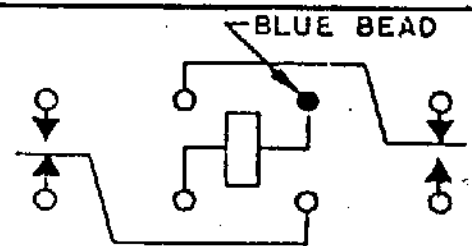


ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS AT 20 g's
 SHOCK 50 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: 2A @ 28 VDC
Resistive 100,000 operations

NOTES: _____

DR 5-1-85 CK. OSW



Communications Instruments, Inc.

CUST. M39016/44-035M
 CUST. NO. QPL

TYPE HFW RELAY

HMS 1201 S III M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HMS1201S111M](#)