

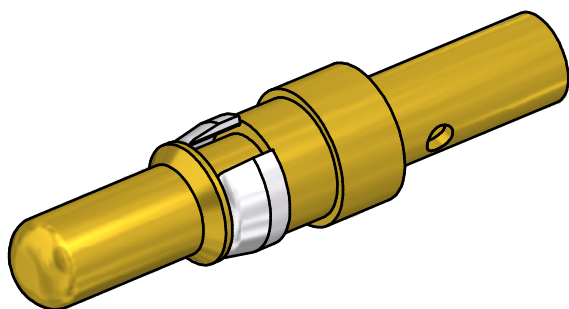
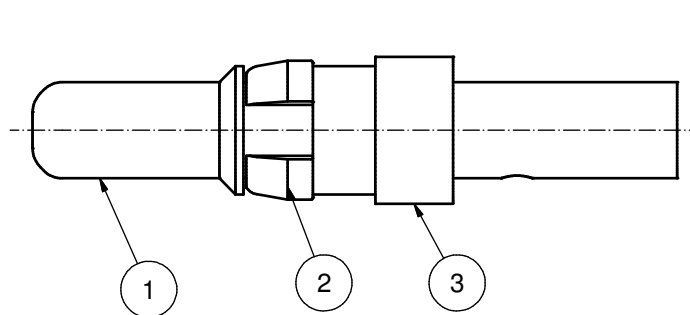


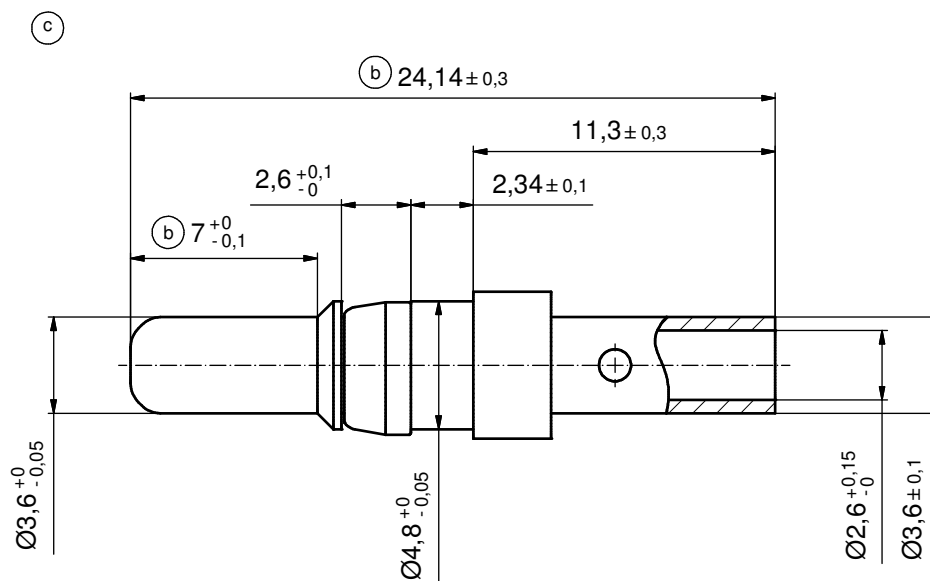

NOTES:
 CRIMPING:
 USE CRIMP TOOL: 360X10409X
 WITH TOOL INSERT: 360X20029X
 SELECTOR SETTINGS: 5 FOR AWG 12
 4 FOR AWG 14

STRIPPING DIMENSIONS



Directive 2002/95/EC RoHS compliant

3	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL							
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED							
1	1	MATING SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL							
item	quantity	part description	material	plating							
partlist											
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND			tolerance			scale: 5:1				
				ISO 2768-m			material: see partlist				
						dim. in mm	title: HIGH POWER CONTACT MALE CRIMP VERSION 20A / AWG 12-14 PREMATING D-SUB COMBINATION	dwg no: Inventor 10	DIN-A3 sh: 1		
						date				name	
						drawn				10.06.10	Schmidt
						appd.				10.06.10	Koch
						norm					
		5 x c	Ä4115	27.09.201	K.H.	d-old					
		2 x b	Ä3728	23.08.2010	K.H.						
		a	Original								
rev.	description	date	name								
					part no: 131C11129X						

CONEC®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[131C11129X](#)