

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H4	HSG WIDTH DIM CORRECTED TO .199 MAX	18JAN2017	RP	PS

D

C

B


A

D


C

B
























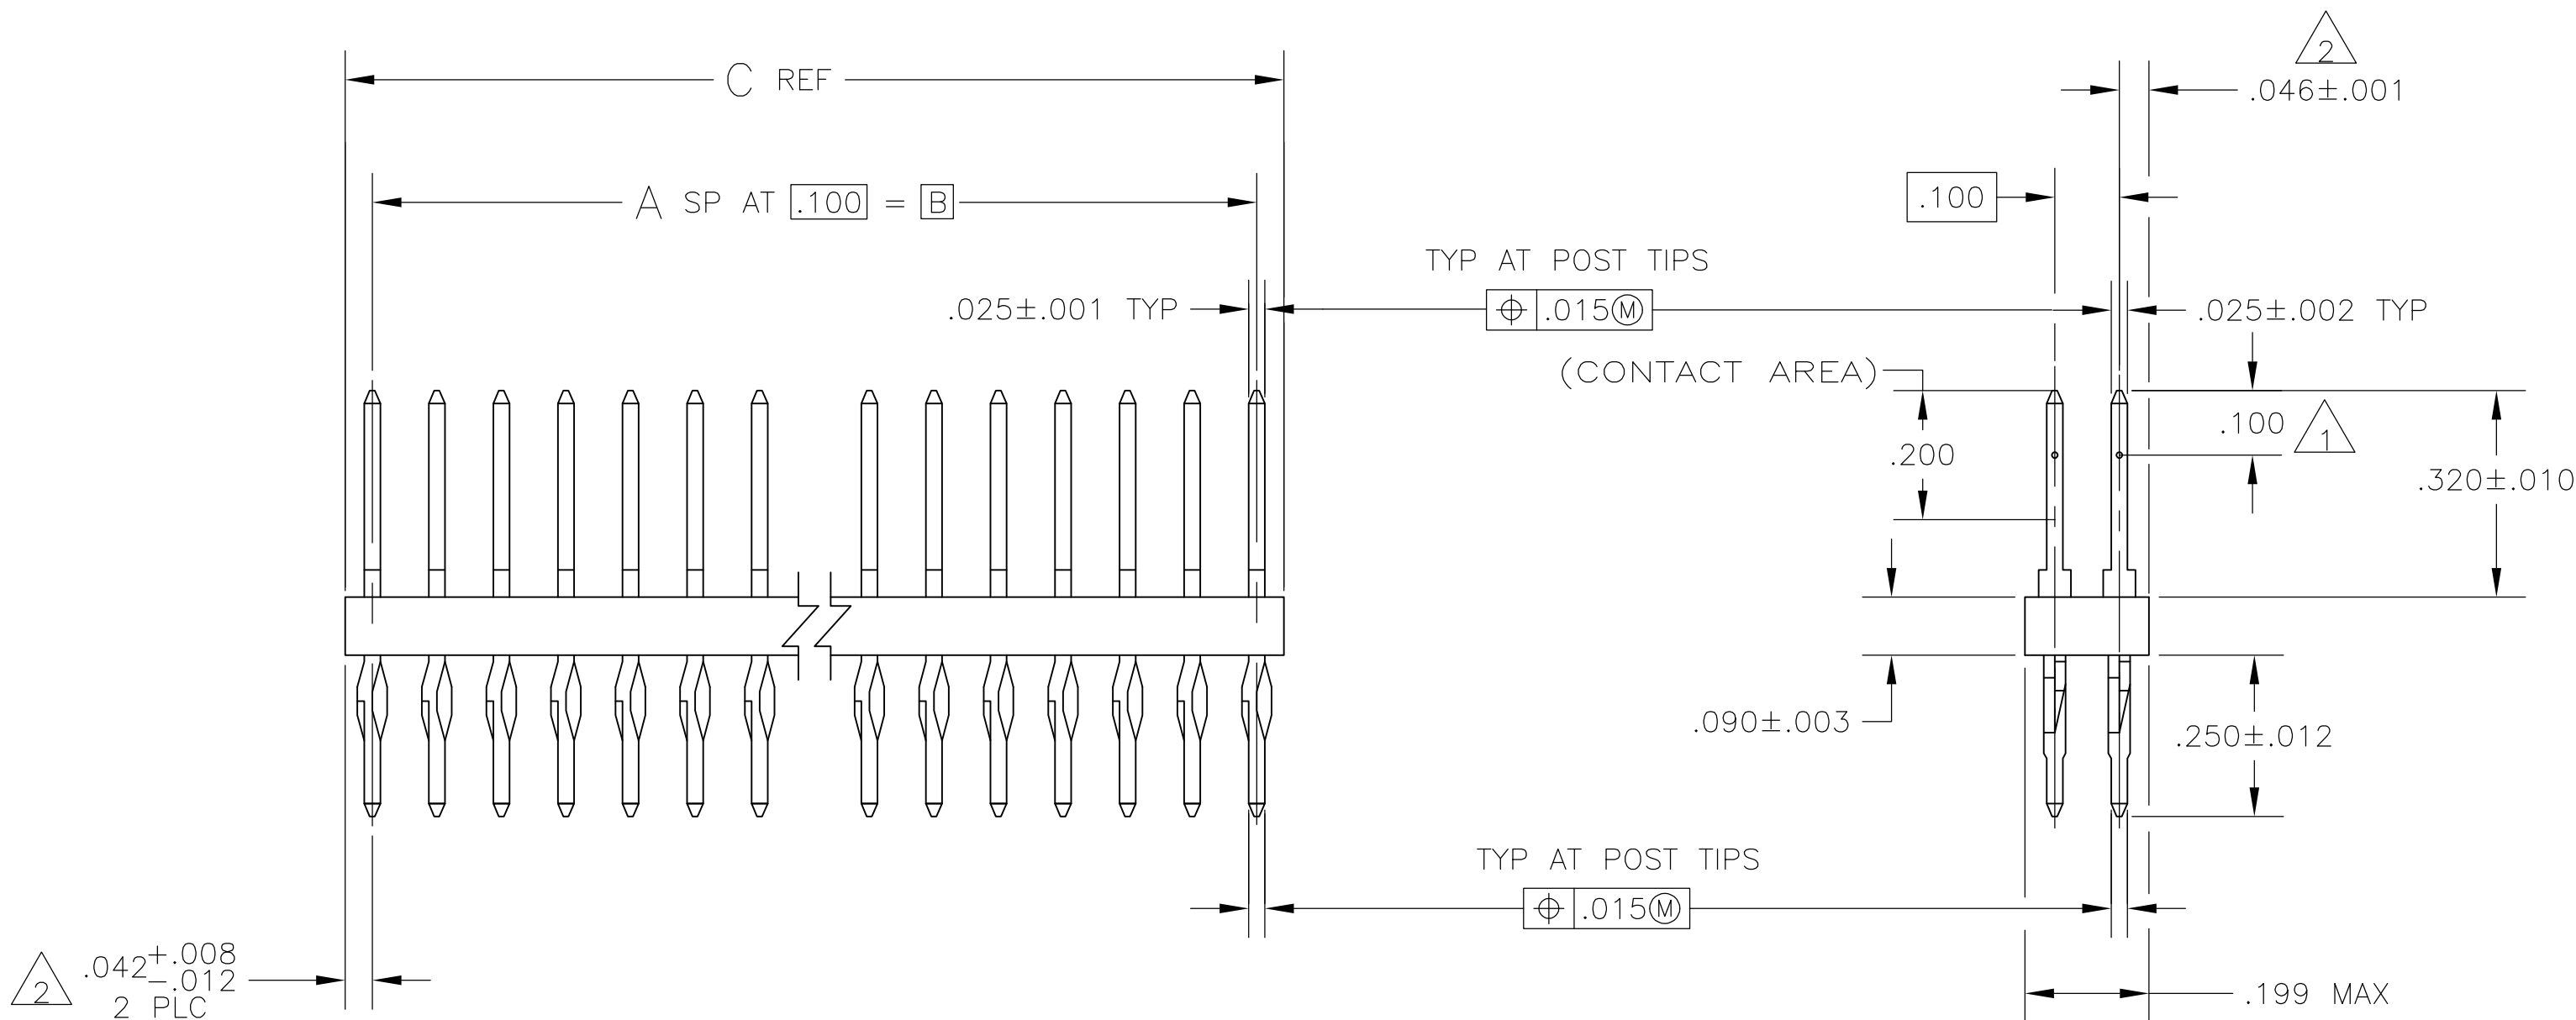A



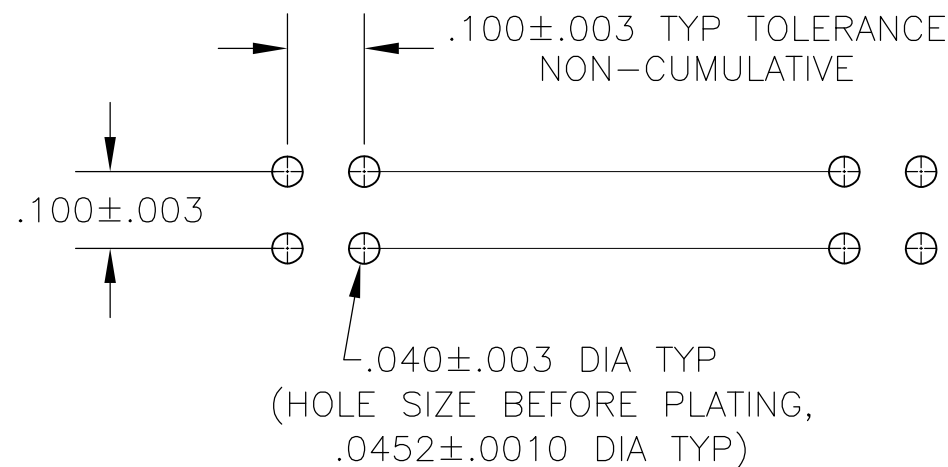












































- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 4 FINISH: POSTS, .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 5 FINISH: POSTS, .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.



RECOMMENDED HOLE LAYOUT

		3.984	3.900	39	80	8-103233-9
OBSOLETE		2.984	2.900	29	60	7-103233-9
OBSOLETE		2.484	2.400	24	50	7-103233-4
OBSOLETE		2.084	2.000	20	42	7-103233-0
		1.984	1.900	19	40	6-103233-9
		1.884	1.800	18	38	6-103233-8
OBSOLETE		1.784	1.700	17	36	6-103233-7
OBSOLETE		1.684	1.600	16	34	6-103233-6
OBSOLETE		1.584	1.500	15	32	6-103233-5
OBSOLETE		1.484	1.400	14	30	6-103233-4
OBSOLETE		1.384	1.300	13	28	6-103233-3
		1.284	1.200	12	26	6-103233-2
OBSOLETE		1.184	1.100	11	24	6-103233-1
OBSOLETE		1.084	1.00	10	22	6-103233-0
		.984	.900	9	20	5-103233-9
		.884	.800	8	18	5-103233-8
		.784	.700	7	16	5-103233-7
		.684	.600	6	14	5-103233-6
		.584	.500	5	12	5-103233-5
		.484	.400	4	10	5-103233-4
		.384	.300	3	8	5-103233-3
		.284	.200	2	6	5-103233-2
OBSOLETE		.184	.100	1	4	5-103233-1
	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

		3.984	3.900	39	80	3-103233-9
OBSOLETE		3.884	3.800	38	78	3-103233-8
OBSOLETE		3.784	3.700	37	76	3-103233-7
OBSOLETE		3.684	3.600	36	74	3-103233-6
OBSOLETE		3.584	3.500	35	72	3-103233-5
OBSOLETE		3.484	3.400	34	70	3-103233-4
OBSOLETE		3.384	3.300	33	68	3-103233-3
OBSOLETE		3.284	3.200	32	66	3-103233-2
OBSOLETE		3.184	3.100	31	64	3-103233-1
OBSOLETE		3.084	3.000	30	62	3-103233-0
		2.984	2.900	29	60	2-103233-9
OBSOLETE		2.884	2.800	28	58	2-103233-8
OBSOLETE		2.784	2.700	27	56	2-103233-7
OBSOLETE		2.684	2.600	26	54	2-103233-6
OBSOLETE		2.584	2.500	25	52	2-103233-5
		2.484	2.400	24	50	2-103233-4
OBSOLETE		2.384	2.300	23	48	2-103233-3
OBSOLETE		2.284	2.200	22	46	2-103233-2
 OBSOLETE		2.184	2.100	21	44	2-103233-1
 OBSOLETE		2.084	2.000	20	42	2-103233-0
		1.984	1.900	19	40	1-103233-9
		1.884	1.800	18	38	1-103233-8
 OBSOLETE		1.784	1.700	17	36	1-103233-7
		1.684	1.600	16	34	1-103233-6
		1.584	1.500	15	32	1-103233-5
 OBSOLETE		1.484	1.400	14	30	1-103233-4
 OBSOLETE		1.384	1.300	13	28	1-103233-3
		1.284	1.200	12	26	1-103233-2
		1.184	1.100	11	24	1-103233-1
 OBSOLETE		1.084	1.00	10	22	1-103233-0
		.984	.900	9	20	103233-9
		.884	.800	8	18	103233-8
		.784	.700	7	16	103233-7
		.684	.600	6	14	103233-6
		.584	.500	5	12	103233-5
		.484	.400	4	10	103233-4
		.384	.300	3	8	103233-3
		.284	.200	2	6	103233-2
		.184	.100	1	4	103233-1
	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H.MOLL 15 JULY 87
CHK L.A.MAYER 16 JULY 87
APVD T.C.CLARK 17 JULY 87

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

SEE TABLE

MATERIAL -

WEIGHT

CUSTOMER DRAWING

NAME HDR ASSY, MOD II
UNSHRD COMP PIN, DUAL ROW
.100 X .100 C/L, .025 SQ POSTS

SIZE CAGE CODE DRAWING NO
A1 00779 103233

RESTRICTED TO -

TE Connectivity

SCALE 4:1 SHEET 1 OF 1 REV H4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103233-1](#)