

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, 19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD

C

REV / 0720-0967-96

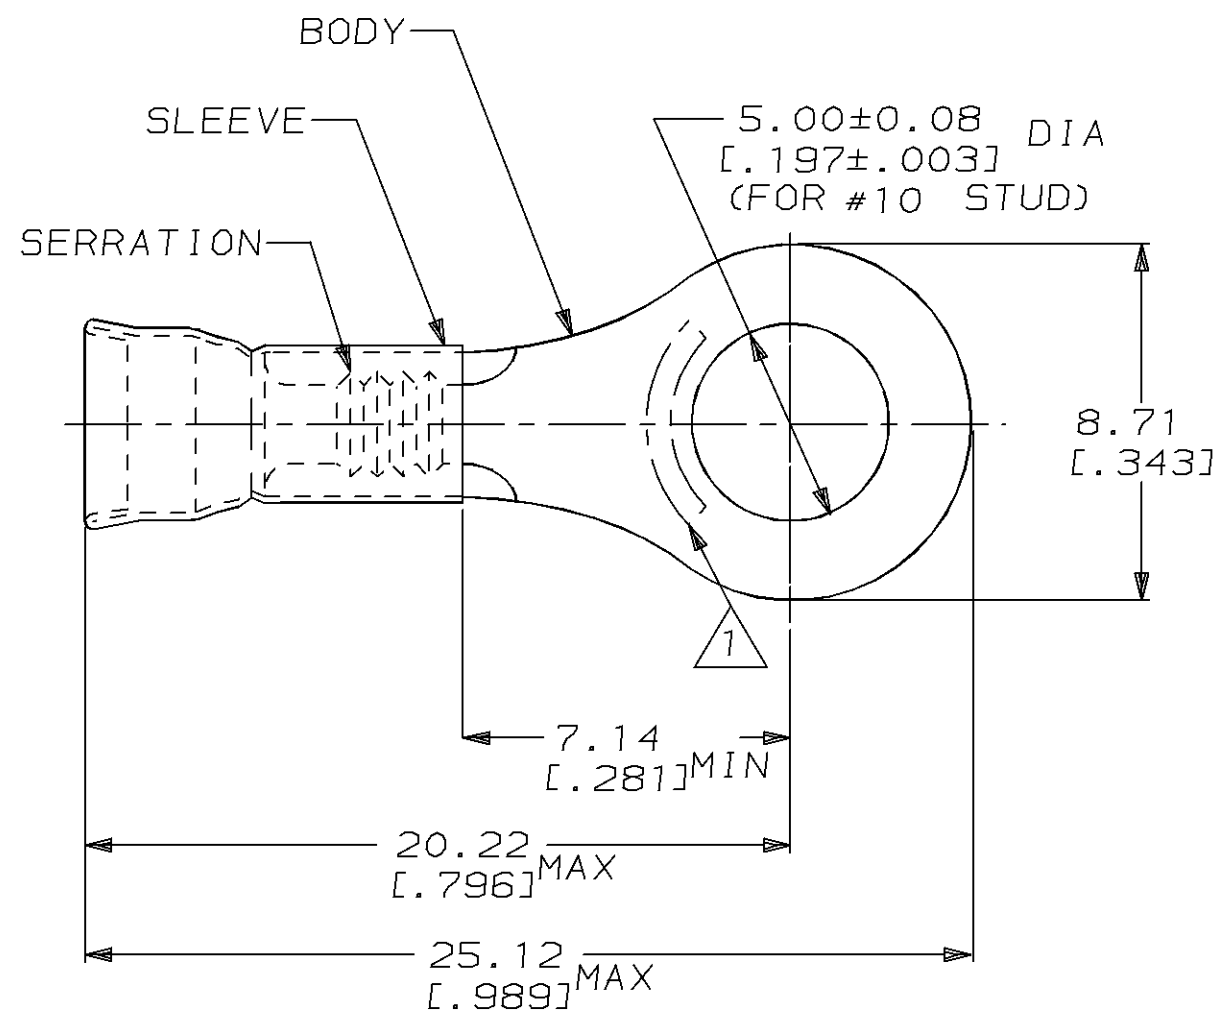
09SEP96

ME

TM

AMP
WIRE RANGE

UL E13288

LR7189
Certified16-14 AWG
SOLID OR STRANDED16-14 AWG
SOLID OR STRANDED16-14 AWG
SOLID OR STRANDED


1 STAMP AMP 16-14HD* LOCATE
APPROX AS SHOWN

2. WIRE INSUL DIA, 3.81-5.84 [.150-.230]

3. TONGUE MATL THK, 1.22±0.05 [.048±.002]

2500	ON TAPE, REEL	2-33722-1
500	LOOSE PIECE	33722
QTY	PACKAGE TYPE	PART NO

DWN L OLMEDA	23JAN95	AMP		AMP Incorporated		
CHK M ELLIS	23JAN95			Harrisburg, PA 17105-3608		
APVD S BORTNER	23JAN95	NAME	TERMINAL, RING, DIAMOND GRIP, WIRE SIZE, 16-14HD AWG			
PRODUCT SPEC UL486A		SIZE A3	CAGE CODE 00779	DRAWING NO C-33722		
APPLICATION SPEC -				SCALE 4:1		
WEIGHT -		SHEET 1 OF 1		REV C		
CUSTOMER DRAWING						

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING
TEMPERATURE:
170°C [338°F]THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:
mm [in]MATERIAL
BODY, CU, SLV, CU PER
ASTM B152TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ±-
1 PLC ±-
2 PLC ±0.20 [.008]
3 PLC ±-
4 PLC ±-
ANGLES ±-FINISH
TIN PLATE
PER MIL-T-10727FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

CIRCULAR MIL AREA:
1.04mm²-2.62mm² [2050-5180]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[33722](#)