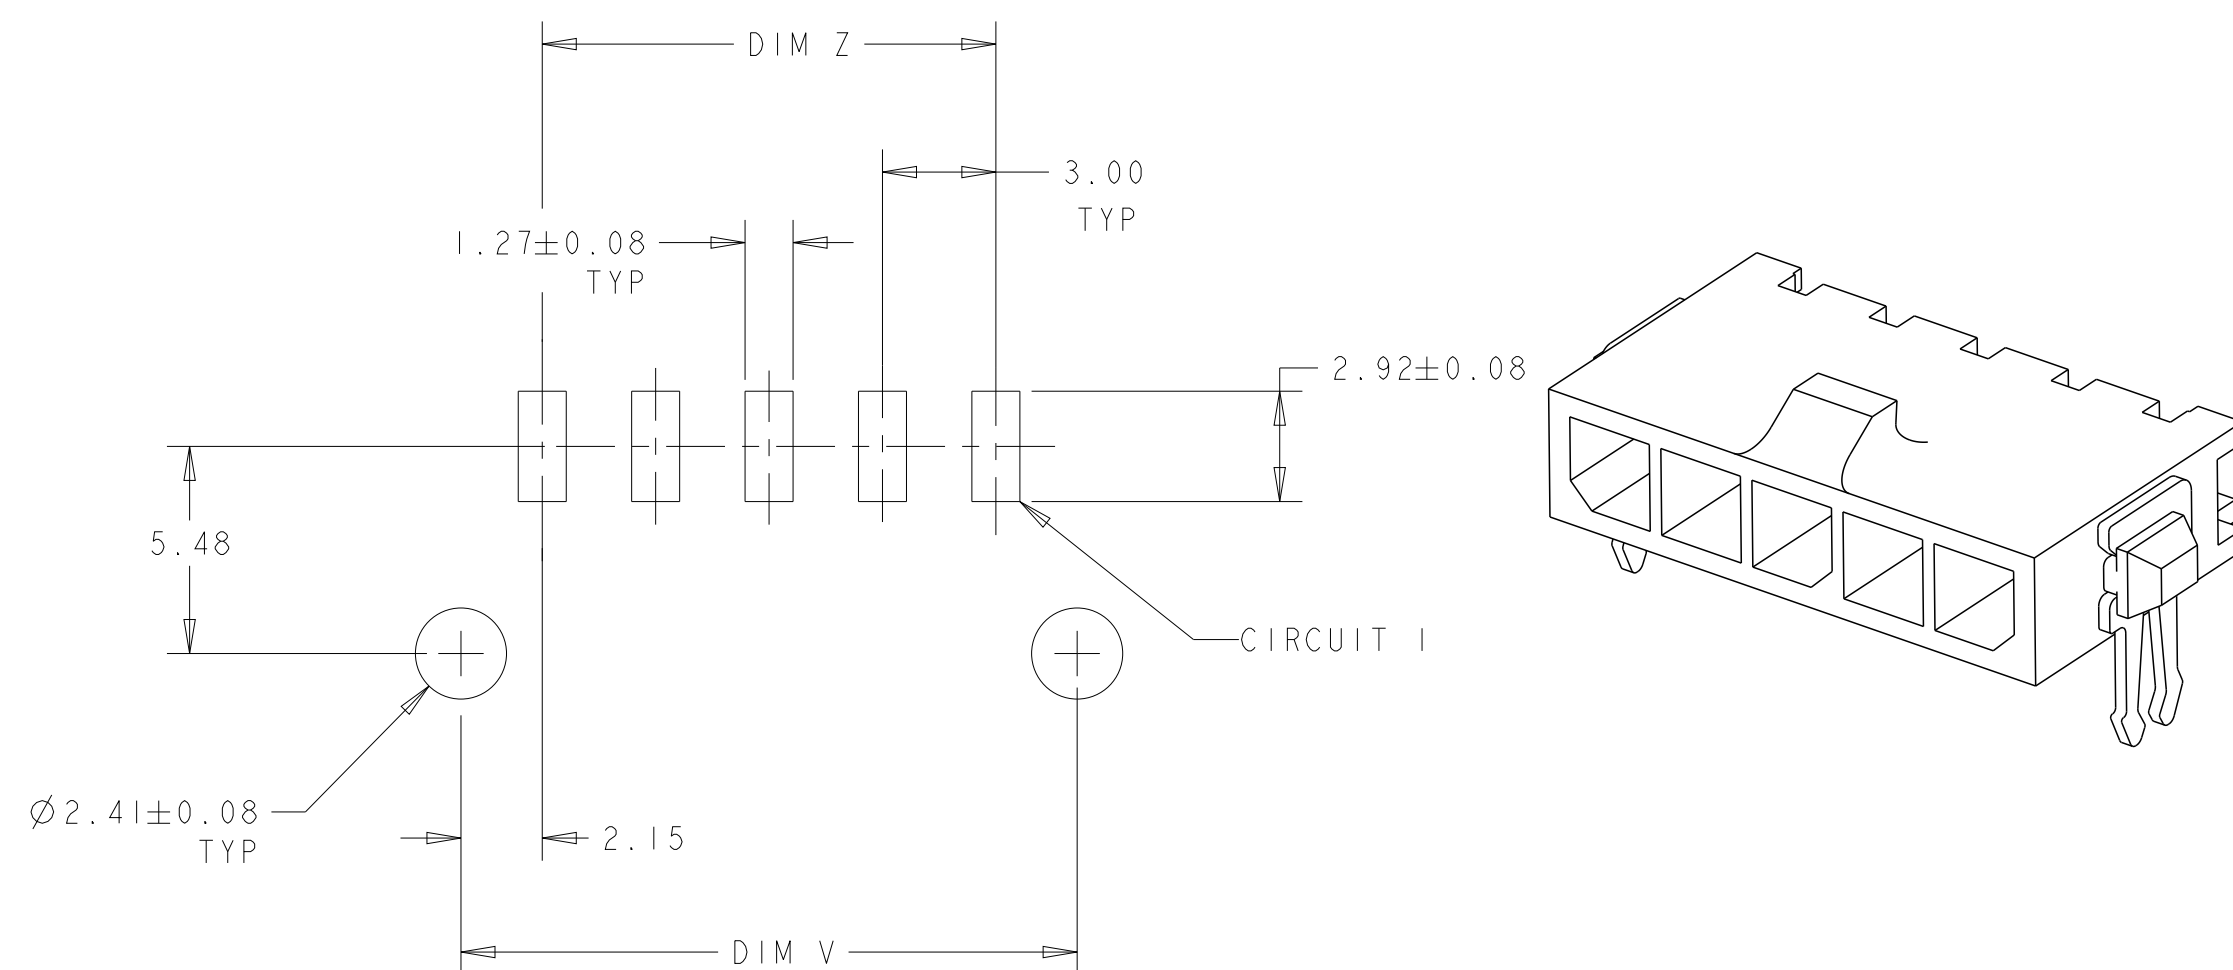
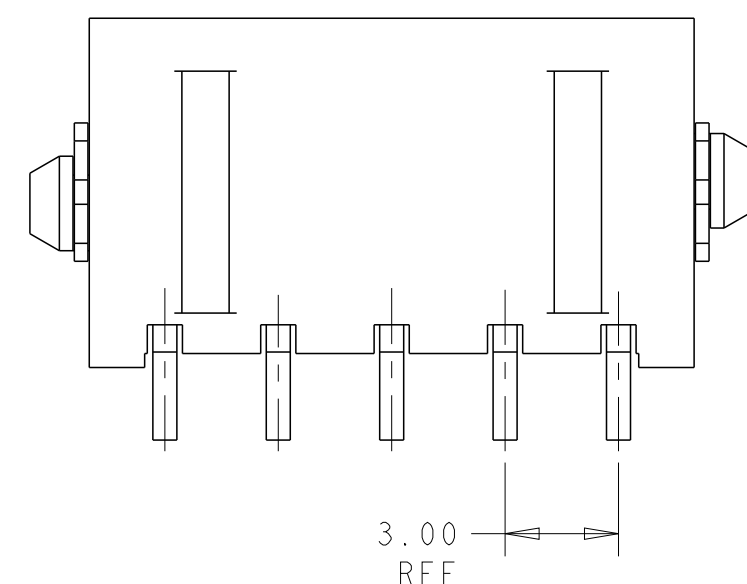
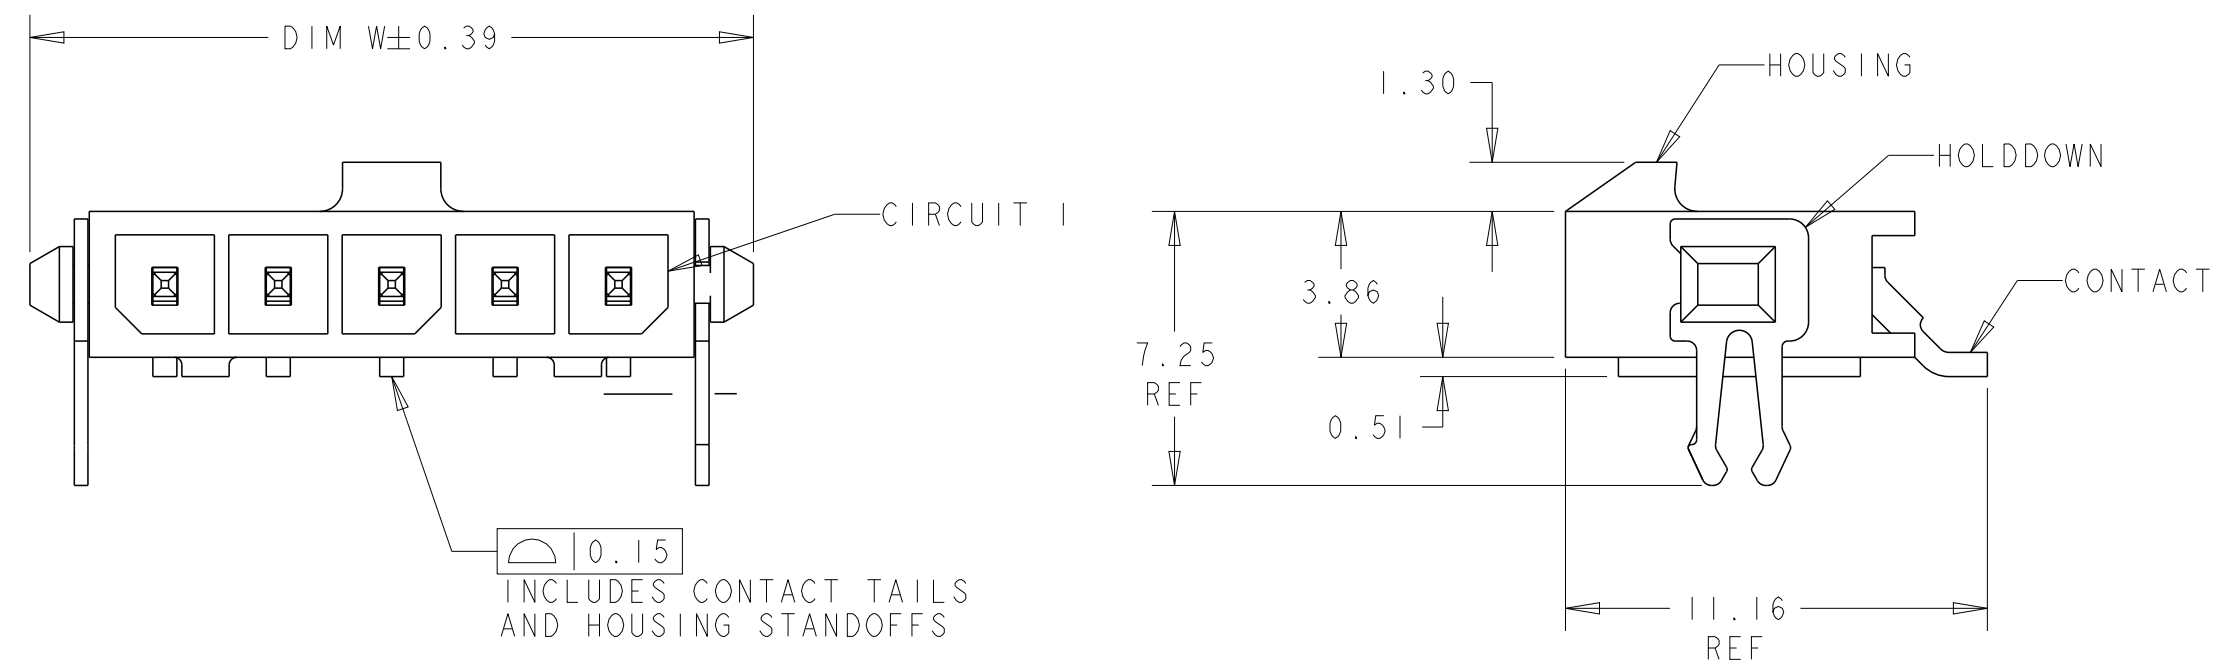


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B2	REVISED PER ECR-16-011506	23JUN2017	NK	CX

PCB LAYOUT COMPONENT SIDE

- ① MATERIAL: CONTACTS - BRASS
 HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
 HOLDDOWNS: - PHOSPHOR BRONZE.
- ② PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END,
 2.54µm MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
 1.27µm MINIMUM NICKEL.
 HOLDDOWNS: 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM
 NICKEL.
- ④ RECOMMENDED PC BOARD THICKNESS OF 1.57.
- ⑤ PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END,
 2.54µm MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
 1.27µm MINIMUM NICKEL.
 HOLDDOWNS: 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM
 NICKEL.

	33.00	37.43	40.00	12	3-1445099-2
	30.00	34.43	37.00	11	3-1445099-1
	27.00	31.43	34.00	10	3-1445099-0
	24.00	28.43	31.00	9	2-1445099-9
	21.00	25.43	28.00	8	2-1445099-8
	18.00	22.43	25.00	7	2-1445099-7
	15.00	19.43	22.00	6	2-1445099-6
	12.00	16.43	19.00	5	2-1445099-5
	9.00	13.43	16.00	4	2-1445099-4
	6.00	10.43	13.00	3	2-1445099-3
	3.00	7.43	10.00	2	2-1445099-2

SUPERSEDED BY 3-1445099-2	$\triangle_2$	33.00	37.43	40.00	12	+1445099-2
SUPERSEDED BY 3-1445099-1	$\triangle_2$	30.00	34.43	37.00	11	+1445099-1
SUPERSEDED BY 3-1445099-0	$\triangle_2$	27.00	31.43	34.00	10	+1445099-0
SUPERSEDED BY 2-1445099-9	$\triangle_2$	24.00	28.43	31.00	9	+445099-9
SUPERSEDED BY 2-1445099-8	$\triangle_2$	21.00	25.43	28.00	8	+445099-8
SUPERSEDED BY 2-1445099-7	$\triangle_2$	18.00	22.43	25.00	7	+445099-7
SUPERSEDED BY 2-1445099-6	$\triangle_2$	15.00	19.43	22.00	6	+445099-6
SUPERSEDED BY 2-1445099-5	$\triangle_2$	12.00	16.43	19.00	5	+445099-5
SUPERSEDED BY 2-1445099-4	$\triangle_2$	9.00	13.43	16.00	4	+445099-4
SUPERSEDED BY 2-1445099-3	$\triangle_2$	6.00	10.43	13.00	3	+445099-3
SUPERSEDED BY 2-1445099-2	$\triangle_2$	3.00	7.43	10.00	2	+445099-2

FINISH	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER
--------	-------	-------	-------	-------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ROOT 09OCT2000		 TE Connectivity	
		CHK K. WHITAKER 17-APR-2001			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE SURFACE MNT HEADER ASSY, 0.76 MIC GOLD CONTACTS, W/THRU HOLE HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK	
mm		APVD C. JONES 17-APR-2001			
		PRODUCT SPEC			
		APPLICATION SPEC			
0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± MATERIAL FINISH		WEIGHT		SIZE A2	
 SEE TABLE		-		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-1445099	
				RESTRICTED TO -	
				SCALE 5:1	
				SHEET OF 1	
				REV B2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1445099-0](#)