


SERPAC C6

Electronic Enclosures

NOTES:

1) When machine or I-plates modifications are required, use the center of the enclosure to dimension.

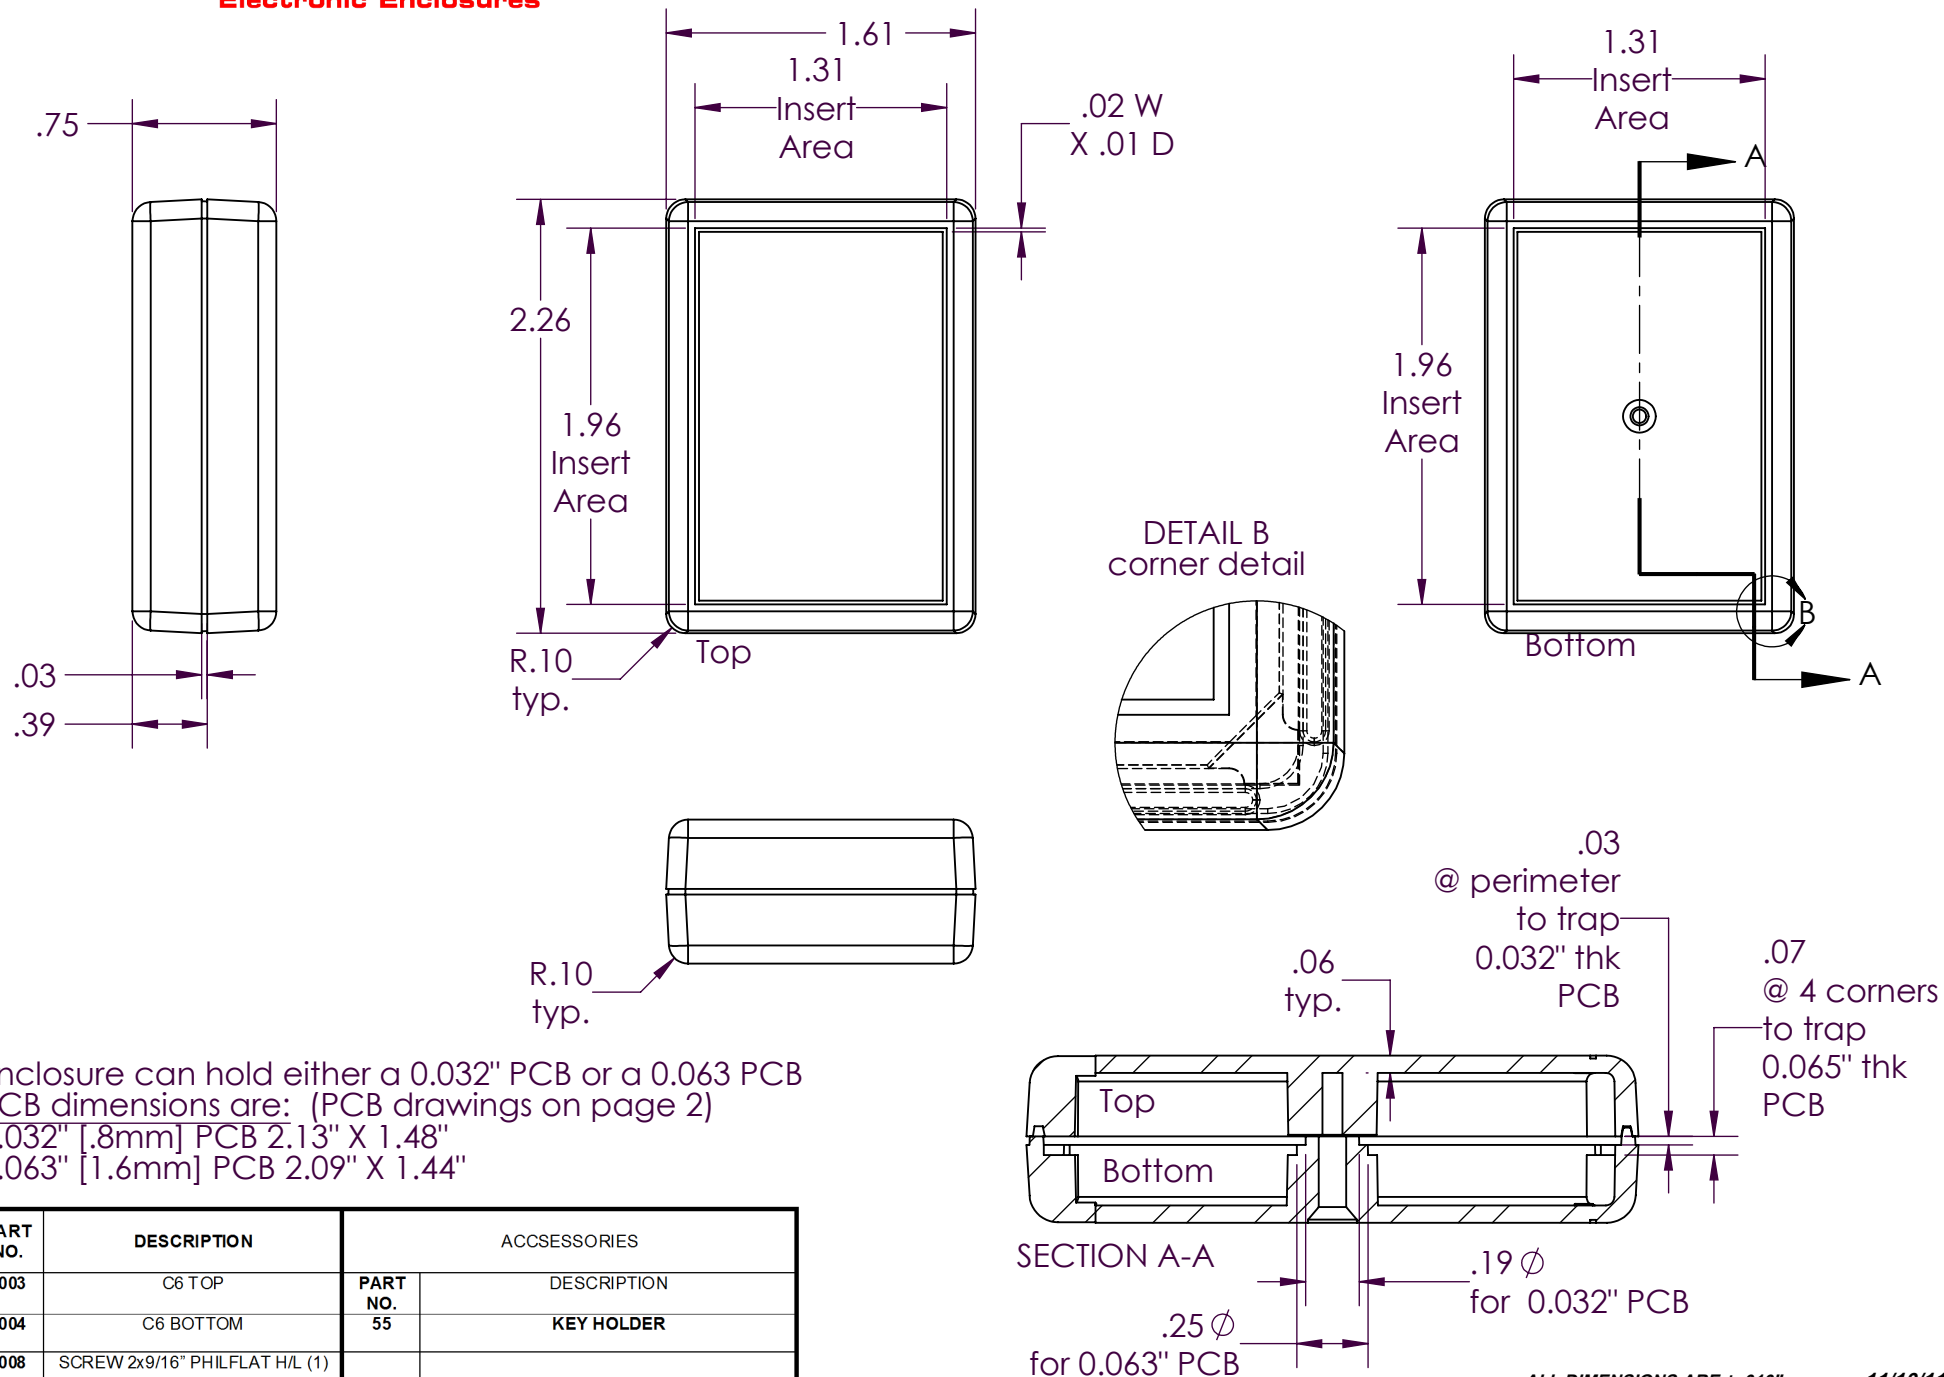


Enclosure can hold either a 0.032" PCB or a 0.063" PCB
 PCB dimensions are: (PCB drawings on page 2)
 0.032" [.8mm] PCB 2.13" X 1.48"
 0.063" [1.6mm] PCB 2.09" X 1.44"

PART NO.	DESCRIPTION	ACCESSORIES	
1003	C6 TOP	PART NO. 55	DESCRIPTION
1004	C6 BOTTOM	55	KEY HOLDER
6008	SCREW 2x9/16" PHILFLAT H/L (1)		


ALL DIMENSIONS ARE $\pm .010"$ 11/10/11
 2009 Wright Ave., La Verne, CA 91750
 Ph. (626) 331-0517 Fx. (626) 331-8584 www.serpac.com

SERPAC CIRCUIT BOARD C6

Electronic Enclosures

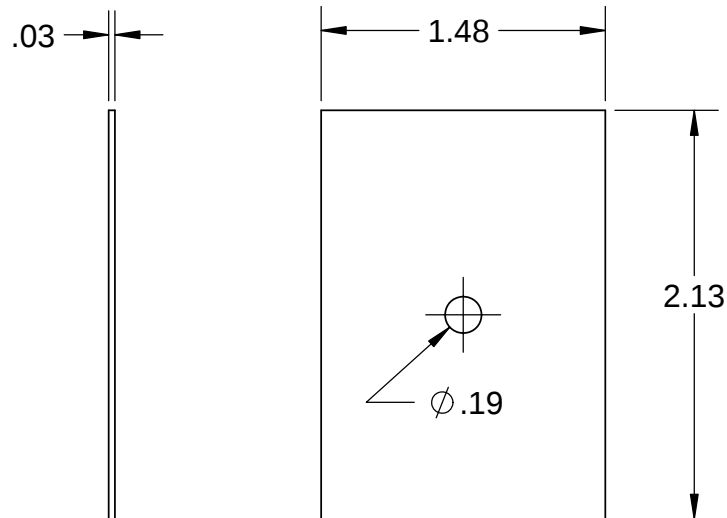

.032 board

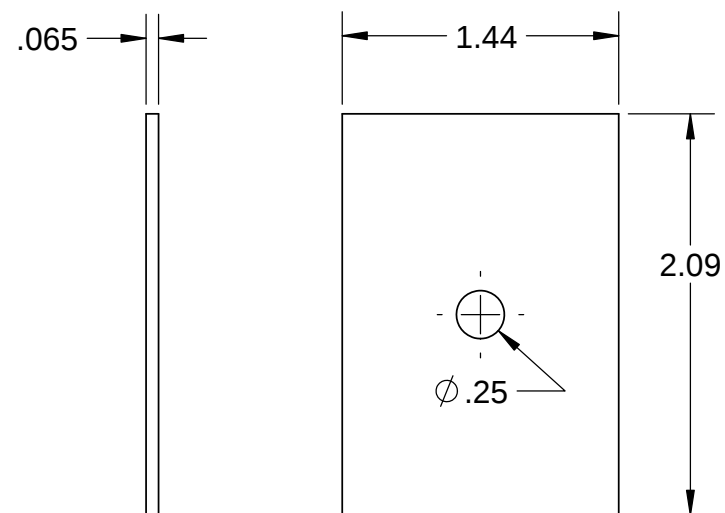

.065 board

NOTES:

These are suggested dimensions.

Plastic parts have a ± 0.010 " manufacturing tolerance.

11/14/2011

2009 Wright Ave., La Verne, CA 91750

(626) 331-0517 Fax (626) 331-8584 <http://www.serpac.com>.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

SERPAC:

[C-6-PC-BLACK](#) [C-6-PC-ALMOND](#) [C-6-PC-GRAY](#) [C-6TR-BL](#) [C-6TR-GR](#) [C-6TR-GY](#) [C-6TR-RD](#) [C-6-A](#) [C-6-B](#) [C-6-](#)
[G](#)