

#### Is Now Part of



# ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



April 2007

# 74VHC374 Octal D-Type Flip-Flop with 3-STATE Outputs

#### **Features**

- High Speed: t<sub>PD</sub> = 5.4ns (typ) at V<sub>CC</sub> = 5V
- High noise immunity:  $V_{NIH} = V_{NIL} = 28\% V_{CC}$  (Min.)
- Power down protection is provided on all inputs
- Low power dissipation:  $I_{CC} = 4\mu A$  (Max) @  $T_A = 25$ °C
- Pin and function compatible with 74HC374

## **General Description**

The VHC374 is an advanced high speed CMOS octal flip-flop with 3-STATE output fabricated with silicon gate CMOS technology. It achieves the high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation. This 8-bit D-type flip-flop is controlled by a clock input (CP) and an output enable input  $(\overline{OE})$ . When the  $\overline{OE}$  input is HIGH, the eight outputs are in a HIGH impedance state.


An input protection circuit ensures that 0V to 7V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5V to 3V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.

## **Ordering Information**

Order Number	Package Number	Package Description
74VHC374M	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
74VHC374SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74VHC374MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Surface mount packages are also available on Tape and Reel. Specify by appending the suffix letter "X" to the ordering number. Pb-Free package per JEDEC J-STD-020B.


## **Connection Diagram**



#### **Pin Descriptions**

Description
Data Inputs
Clock Pulse Input
3-STATE Output Enable Input
3-STATE Outputs

## **Logic Symbol**



### **Functional Description**

The VHC374 consists of eight edge-triggered flip-flops with individual D-type inputs and 3-STATE true outputs. The buffered clock and buffered Output Enable are common to all flip-flops. The eight flip-flops will store the state of their individual D inputs that meet the setup and hold time requirements on the LOW-to-HIGH Clock (CP) transition. With the Output Enable  $\overline{(OE)}$  LOW, the contents of the eight flip-flops are available at the outputs. When the  $\overline{OE}$  is HIGH, the outputs go to the high impedance state. Operation of the  $\overline{OE}$  input does not affect the state of the flip-flops.

#### **Truth Table**

	Outputs		
D <sub>n</sub>	СР	ŌĒ	O <sub>n</sub>
Н	<i></i>	L	Н
L	<i></i>	L	L
Х	Х	Н	Z

H = HIGH Voltage Level


L = LOW Voltage Level

X = Immaterial

Z = High Impedance

✓ = LOW-to-HIGH Transition

## **Logic Diagram**

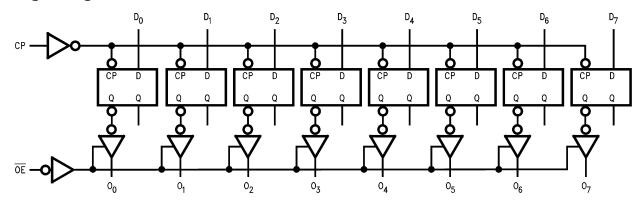

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Figure 1.

## **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	-0.5V to +7.0V
V <sub>IN</sub>	DC Input Voltage	-0.5V to +7.0V
V <sub>OUT</sub>	DC Output Voltage	–0.5V to V <sub>CC</sub> + 0.5V
I <sub>IK</sub>	Input Diode Current	–20mA
I <sub>OK</sub>	Output Diode Current	±20mA
I <sub>OUT</sub>	DC Output Current	±25mA
I <sub>CC</sub>	DC V <sub>CC</sub> /GND Current	±75mA
T <sub>STG</sub>	Storage Temperature	–65°C to +150°C
T <sub>L</sub>	Lead Temperature (Soldering, 10 seconds)	260°C

## Recommended Operating Conditions<sup>(1)</sup>

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	2.0V to +5.5V
V <sub>IN</sub>	Input Voltage	0V to +5.5V
V <sub>OUT</sub>	Output Voltage	0V to V <sub>CC</sub>
T <sub>OPR</sub>	Operating Temperature	-40°C to +85°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time,	
	$V_{CC} = 3.3V \pm 0.3V$	0ns/V ~ 100ns/V
	$V_{CC} = 5.0V \pm 0.5V$	0ns/V ~ 20ns/V

#### Note:

1. Unused inputs must be held HIGH or LOW. They may not float.

## **DC Electrical Characteristics**

					T <sub>A</sub> =						
				Conditions		25°C			-40°C to +85°C		1
Symbol	Parameter	V <sub>CC</sub> (V)	Cor			Тур.	Max.	Min.	Max.	Units	
V <sub>IH</sub>	HIGH Level	2.0			1.50			1.50		V	
	Input Voltage	3.0–5.5			0.7 x V <sub>CC</sub>			0.7 x V <sub>CC</sub>			
V <sub>IL</sub>	LOW Level Input	2.0					0.50		0.50	V	
	Voltage	3.0-5.5					0.3 x V <sub>CC</sub>		0.3 x V <sub>CC</sub>		
V <sub>OH</sub>	HIGH Level	2.0	$V_{IN} = V_{IH}$	$I_{OH} = -50\mu A$	1.9	2.0		1.9		V	
	Output	3.0	or V <sub>IL</sub>		2.9	3.0		2.9			
	Voltage	4.5			4.4	4.5		4.4			
		3.0		$I_{OH} = -4mA$	2.58			2.48			
		4.5		$I_{OH} = -8mA$	3.94			3.80			
V <sub>OL</sub>	LOW Level	2.0	$V_{IN} = V_{IH}$	$I_{OL} = 50\mu A$		0.0	0.1		0.1	V	
	Output Voltage	3.0	or V <sub>IL</sub>			0.0	0.1		0.1		
		4.5				0.0	0.1		0.1		
		3.0		I <sub>OL</sub> = 4mA			0.36		0.44		
		4.5		I <sub>OL</sub> = 8mA			0.36		0.44		
I <sub>OZ</sub>	3-STATE Output Off-State Current	5.5	$V_{IN} = V_{IH}$ $V_{OUT} = V_{OUT}$	or V <sub>IL</sub> ; <sub>CC</sub> or GND			±0.25		±2.5	μΑ	
I <sub>IN</sub>	Input Leakage Current	0–5.5	V <sub>IN</sub> = 5.5V or GND				±0.1		±1.0	μΑ	
Icc	Quiescent Supply Current	5.5	$V_{IN} = V_{CC}$	or GND			4.0		40.0	μА	

## **Noise Characteristics**

				$T_A = 25^{\circ}C$		
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Тур.	Limits	Units
V <sub>OLP</sub> <sup>(2)</sup>	Quiet Output Maximum Dynamic V <sub>OL</sub>	5.0	C <sub>L</sub> = 50pF	0.6	0.9	V
V <sub>OLV</sub> <sup>(2)</sup>	Quiet Output Minimum Dynamic V <sub>OL</sub>	5.0	C <sub>L</sub> = 50pF	-0.6	-0.9	V
V <sub>IHD</sub> <sup>(2)</sup>	Minimum HIGH Level Dynamic Input Voltage	5.0	C <sub>L</sub> = 50pF		3.5	V
V <sub>ILD</sub> <sup>(2)</sup>	Maximum LOW Level Dynamic Input Voltage	5.0	C <sub>L</sub> = 50pF		1.5	V

#### Note:

2. Parameter guaranteed by design.

#### **AC Electrical Characteristics**

					Т	' <sub>A</sub> = 25°	С		–40°C 85°C	
Symbol	Parameter	V <sub>CC</sub> (V)	Cond	itions	Min.	Тур.	Max.	Min.	Max.	Units
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay	3.3 ± 0.3		$C_L = 15pF$		8.1	12.7	1.0	15.0	ns
	Time (CP to O <sub>n</sub> )			$C_L = 50pF$		10.6	16.2	1.0	18.5	
		5.0 ± 0.5		C <sub>L</sub> = 15pF		5.4	8.1	1.0	9.5	ns
				$C_L = 50pF$		6.9	10.1	1.0	11.5	
t <sub>PZL</sub> , t <sub>PZH</sub>	3-STATE Output	3.3 ± 0.3	$R_L = 1k\Omega$	C <sub>L</sub> = 15pF		7.1	11.0	1.0	13.0	ns
	Enable Time			$C_L = 50pF$		9.6	14.5	1.0	16.5	
		5.0 ± 0.5		C <sub>L</sub> = 15pF		5.1	7.6	1.0	9.0	ns
				$C_L = 50pF$		6.6	9.6	1.0	11.0	
t <sub>PLZ</sub> , t <sub>PHZ</sub>	3-STATE Output	3.3 ± 0.3	$R_L = 1k\Omega$	$C_L = 50pF$		10.2	14.0	1.0	16.0	ns
	Disable Time	5.0 ± 0.5		$C_L = 50pF$		6.1	8.8	1.0	10.0	
t <sub>OSLH</sub> ,	Output to Output	3.3 ± 0.3	(3)	$C_L = 50pF$			1.5		1.5	ns
toshl	Skew	5.0 ± 0.5		$C_L = 50pF$			1.0		1.0	
f <sub>MAX</sub>	Maximum Clock	3.3 ± 0.3		C <sub>L</sub> = 15pF	80	130		70		MHz
	Frequency			$C_L = 50pF$	55	85		50		
		5.0 ± 0.5		C <sub>L</sub> = 15pF	130	185		110		
				$C_L = 50pF$	85	120		75		
C <sub>IN</sub>	Input Capacitance		V <sub>CC</sub> = Open			4	10		10	pF
C <sub>OUT</sub>	Output Capacitance		$V_{CC} = 5.0V$			6				pF
C <sub>PD</sub>	Power Dissipation Capacitance		(4)			32				pF

#### Notes:


- 3. Parameter guaranteed by design.  $t_{OSLH} = |t_{PLH\;max} t_{PLH\;min}|; \ t_{OSHL} = |t_{PHL\;max} t_{PHL\;min}|$
- 4.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC}$  (opr.) =  $C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC} / 8$  (per F/F). The total  $C_{PD}$  when n pcs. of the Octal D Flip-Flop operates can be calculated by the equation:  $C_{PD}$  (total) = 20 + 12n.


## **AC Operating Requirements**

			Т	A = 25°	С	T <sub>A</sub> = -40°0	C to +85°C	
Symbol	Parameter	V <sub>CC</sub> (V)	Min.	Тур.	Max.	Min.	Max.	Units
$t_W(H), t_W(L)$	Minimum Pulse Width	3.3 ± 0.3	5.0			5.5		ns
	(CP)	5.0 ± 0.5	5.0			5.0		
t <sub>S</sub>	Minimum Set-Up Time	3.3 ± 0.3	4.5			4.5		ns
		5.0 ± 0.5	3.0			3.0		
t <sub>H</sub>	Minimum Hold Time	3.3 ± 0.3	2.0			2.0		ns
		5.0 ± 0.5	2.0			2.0		

## **Physical Dimensions**

Dimensions are in inches (millimeters) unless otherwise noted.










Figure 2. 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Package Number M20B


## Physical Dimensions (Continued)


Dimensions are in millimeters unless otherwise noted.





LAND PATTERN RECOMMENDATION






DIMENSIONS ARE IN MILLIMETERS

## NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.

  B. DIMENSIONS ARE IN MILLIMETERS.

  C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.





M20DREVC

Figure 3. 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide Package Number M20D


## Physical Dimensions (Continued)

Dimensions are in millimeters unless otherwise noted.

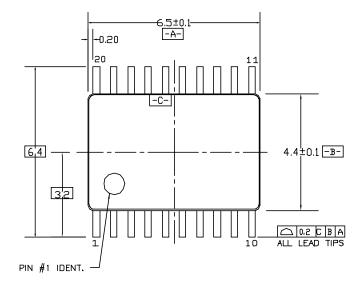




LAND PATTERN RECOMMENDATION





#### NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AC, REF NOTE 6, DATE 7/93.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLDS FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.



SEE DETAIL A

DETAIL A

MTC20REVD1

Figure 4. 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide Package Number MTC20





#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx® TinyLogic<sup>®</sup> HiSeC™ Programmable Active Droop™ Across the board. Around the world.™ QFĔT<sup>®</sup> TINYOPTO™ i-Lo™ ActiveArray™ ImpliedDisconnect™  $\mathsf{Q}\mathsf{S}^{\scriptscriptstyle\mathsf{TM}}$ TinyPower™ TinyWire™ Bottomless™ IntelliMAX™ QT Optoelectronics™ Build it Now™ Quiet Series™ TruTranslation™ ISOPLANAR™ μSerDes™ CoolFET™ MICROCOUPLER™ RapidConfigure™ CROSSVOLT™ RapidConnect™ **UHC®** MicroPak™  $\mathsf{CTL^{\mathsf{TM}}}$ UniFET™ MICROWIRE™ ScalarPump™ Current Transfer Logic™ VCX™ SMART START™  $MSX^{\text{TM}}$ DOME™ SPM® Wire™ MSXPro™

E<sup>2</sup>CMOS™  $\mathsf{STEALTH}^{\mathsf{TM}}$  $OCX^{TM}$ EcoSPARK® SuperFET™ OCXPro™ EnSigna™ OPTOLOGIC® SuperSOT™-3 FACT Quiet Series™ **OPTOPLANAR®** SuperSOT™-6 FACT<sup>®</sup> SuperSOT™-8 PACMAN™  $\mathsf{FAST}^{^{\circledR}}$ SyncFET™ РОР™ FASTr™

FAS Ir  $^{\text{IM}}$  Power 220 $^{\text{©}}$  TCM $^{\text{TM}}$  FPS $^{\text{TM}}$  Power 247 $^{\text{©}}$  The Power Franchise $^{\text{©}}$ 

FRFET® PowerEdge™

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

#### As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **PRODUCT STATUS DEFINITIONS**

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition				
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.				
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.				
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.				
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.				

Rev. I24

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## **ON Semiconductor:**

74VHC374SJX 74VHC374MX 74VHC374MTC 74VHC374M 74VHC374MTCX