




8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1852267-1		A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1852267-2		A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1852267-3		A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1852267-6		A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1852267-7		A	-	-	-	SPARE PARTS	

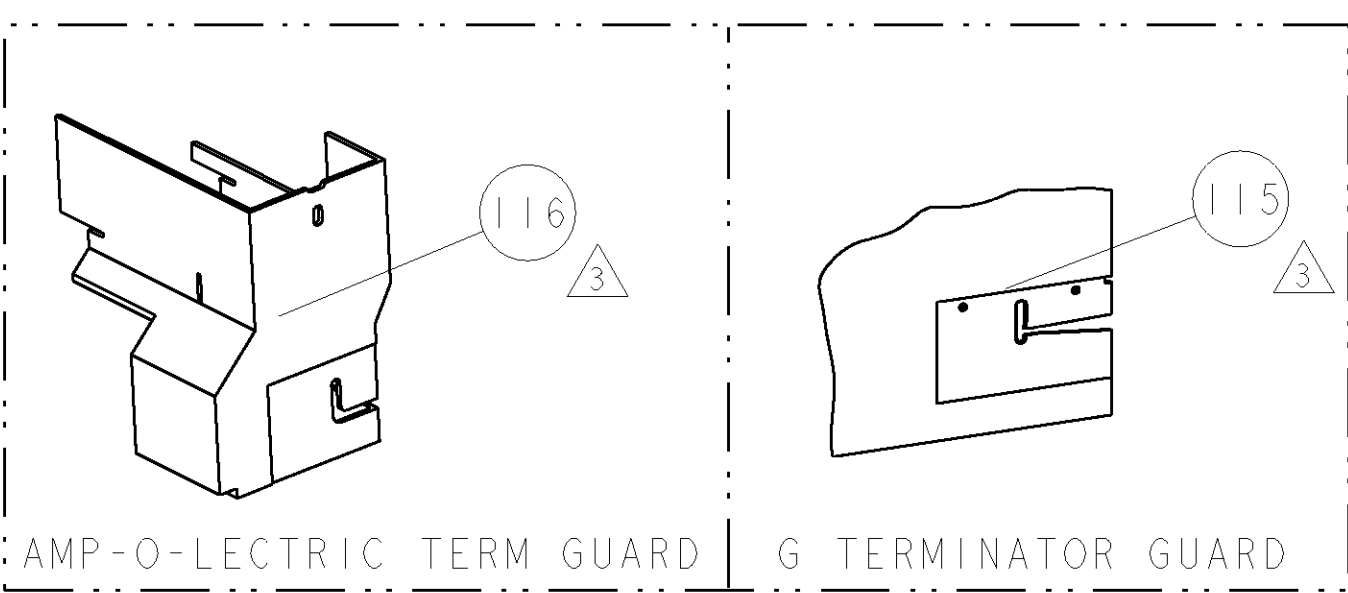



AMP-O-LECTRIC TERM GUARD G TERMINATOR GUARD

TERMINAL NAME: PACKARD					
TYCO	MANF	PACKARD TERMINAL - PACKARD CRIMP SPECS			
1949050	15324340				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	2.35±0.05mm[.093±.002]	5.0mm	
-	-	B	2.15±0.05mm[.085±.002]	3.0mm	
-	-	C	±.002[±0.05mm]	-	
-	-	D	±.002[±0.05mm]	-	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	3.58mm [.141]	F	3.0-5.0mm
-	-	INSUL	5.08mm [1.200]	F	3.00-5.33
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPL INSTRUCTIONS	SET UP GAGE	
.186 - .201	NONE	.658	408-8040	458637-1	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

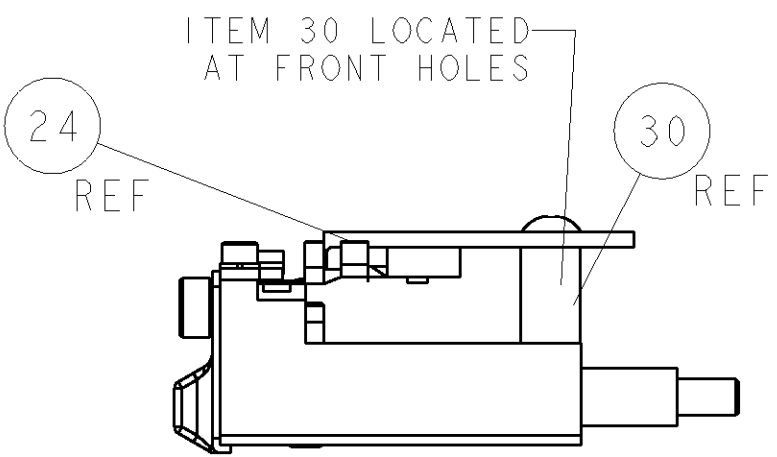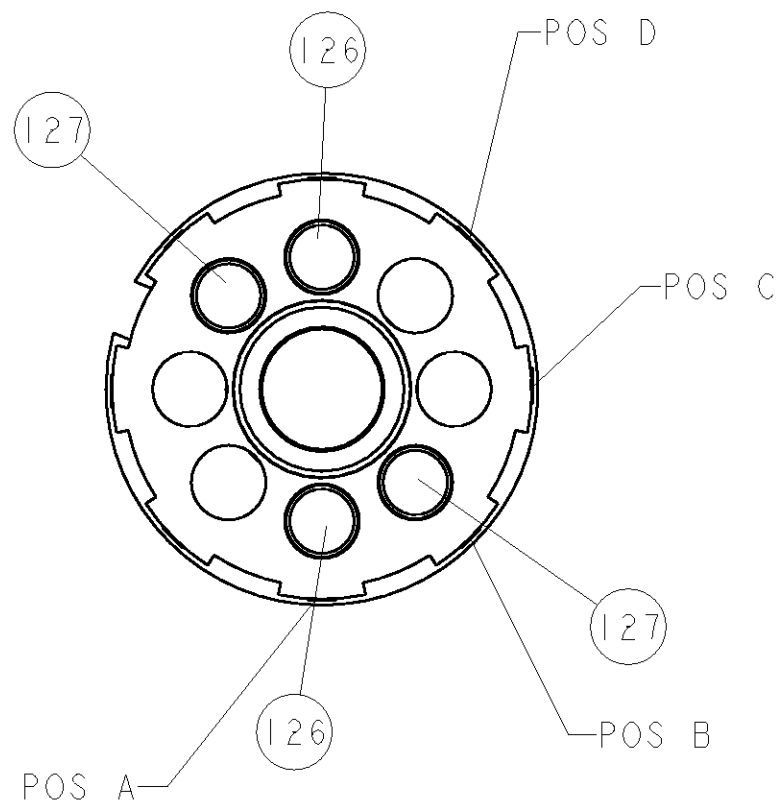

FEED TRACK POSITION

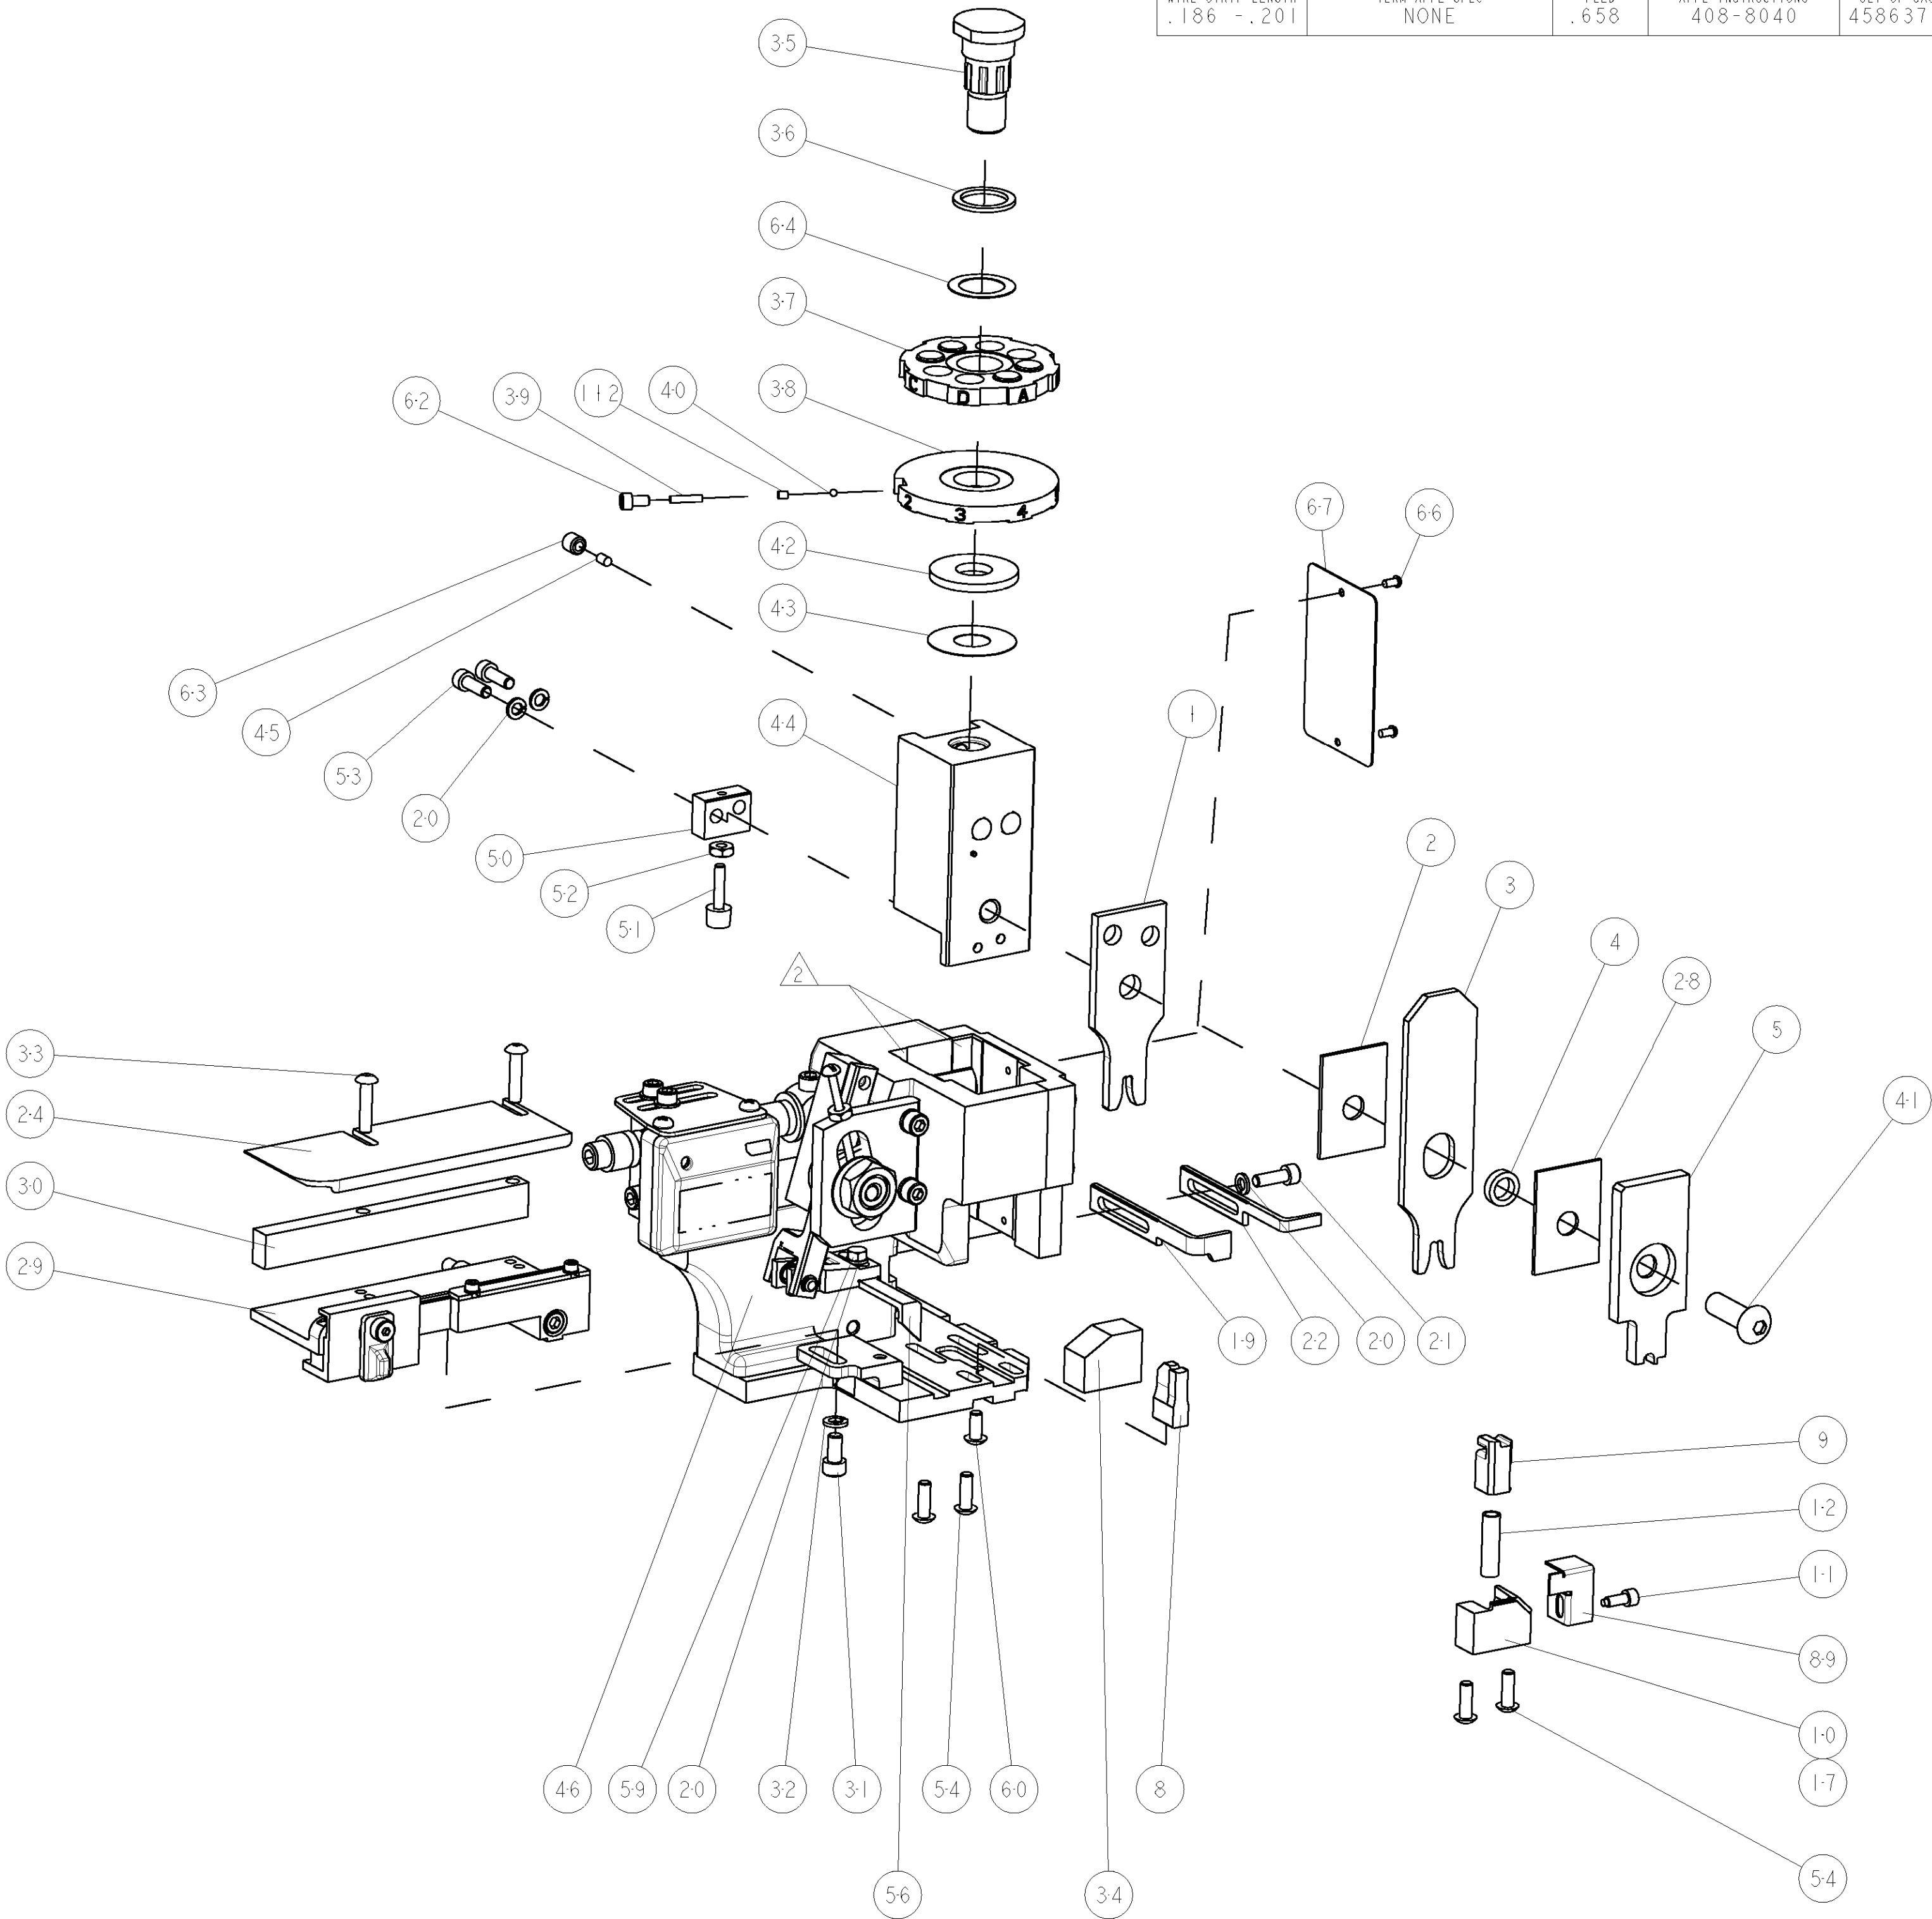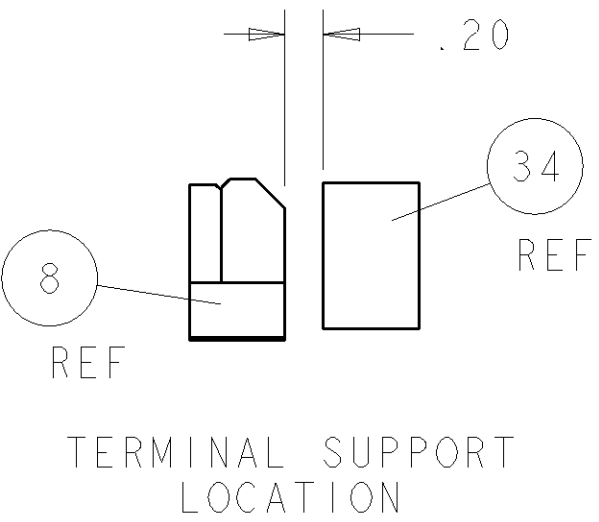

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852267-3](#)