


PIN RECEPTACLES

FOR .015" - .025" DIAMETER PINS

1802/3802/4030/8866

XXXX-0-15-XX-43-XX-04-0

Press-fit in .057 mounting hole

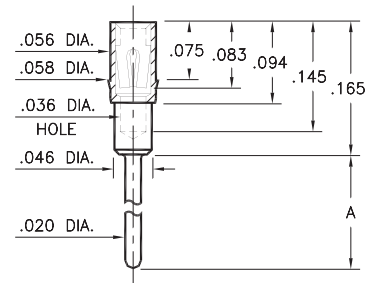


Basic Part Number	Length A
1802-0	.125
3802-0	.165
8866-0	.775
4030-0	.815

1803/1805/1808/3805

XXXX-0-15-XX-XX-XX-04-0

Press-fit in .057 mounting hole

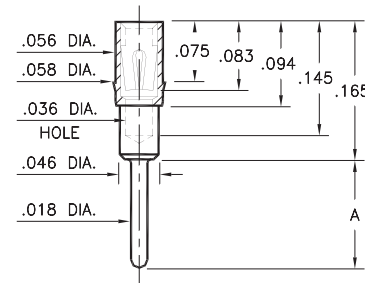


Basic Part Number	Length A
1808-0	.100
1803-0	.145
1805-0	.213
3805-0	.393

1804/1806

180X-0-15-XX-43-XX-04-0

Press-fit in .057 mounting hole




Basic Part Number	Length A
1804-0	.080
1806-0	.115

1807

1807-0-15-XX-43-XX-04-0


Press-fit in .057 mounting hole



4728

4728-15-XX-30-XX-10-0


Solder mount in .054 min. mounting hole



8830

8830-15-XX-22-XX-10-0


Solder mount in .057 min. mounting hole



8363

8363-0-15-XX-35-XX-10-0


Solder mount in .057 min. mounting hole



4622

4622-0-15-XX-30-XX-10-0


Hex press-fit in .053 plated through-hole



6252

6252-0-15-XX-32-XX-10-0

Hex press-fit in .057 plated through-hole



SPECIFICATIONS:

Shell Material: Brass Alloy 360, 1/2 Hard

Contact Material: Beryllium Copper Alloy 172, HT

Dimensions: Inches

Tolerances On: Lengths: $\pm .005$

Diameters: $\pm .002$

Angles: $\pm 2^\circ$



ORDER CODE: XXXX - X - 15 - XX - XX - XX - XX - 0

BASIC PART #

SPECIFY SHELL FINISH:

01 200 μ " TIN/LEAD OVER NICKEL

◆ 80 200 μ " TIN OVER NICKEL (RoHS)

◆ 15 10 μ " GOLD OVER NICKEL (RoHS)

SPECIFY CONTACT FINISH:

02 100 μ " TIN/LEAD OVER NICKEL

◆ 84 100 μ " TIN OVER NICKEL (RoHS)

◆ 27 30 μ " GOLD OVER NICKEL (RoHS)

SELECT CONTACT:

#22, #30, #32 or #43 CONTACT (DATA ON PAGES 252, 253 & 254)

(For alternate contact choices, see groups B and C on page 248)



Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[1808-0-15-01-43-27-04-0](#) [1807-0-15-01-43-27-04-0](#) [1806-0-15-01-43-27-04-0](#) [1805-0-15-01-43-27-04-0](#) [1804-0-15-01-43-27-04-0](#) [1803-0-15-01-43-27-04-0](#) [1802-0-15-01-43-27-04-0](#) [1802-0-15-00-00-00-04-0](#) [1802-0-15-15-43-27-04-0](#) [1803-0-15-15-43-27-04-0](#) [1804-0-15-15-43-27-04-0](#) [1805-0-15-15-43-27-04-0](#) [1806-0-15-15-43-27-04-0](#) [1807-0-15-15-43-27-04-0](#) [1808-0-15-15-43-27-04-0](#) [1802-0-15-00-00-00-04-4](#) [1802-0-15-01-43-27-04-4](#) [1802-0-15-80-43-27-04-4](#) [8866-0-15-00-00-00-04-0](#) [4030-0-15-00-00-00-04-0](#) [4622-0-15-00-00-00-10-0](#) [6252-0-15-00-00-00-10-0](#) [3805-0-15-00-00-00-04-4](#) [8363-0-15-00-00-00-10-0](#) [3805-0-15-80-43-27-04-4](#) [8830-0-15-01-22-14-10-0](#) [1808-0-15-01-43-14-04-0](#) [1804-0-15-01-43-14-04-0](#) [1805-0-15-01-43-14-04-0](#) [1803-0-15-01-43-14-04-0](#) [1807-0-15-01-43-14-04-0](#) [1806-0-15-01-43-14-04-0](#) [1804-0-15-80-43-14-04-0](#) [1808-0-15-80-43-14-04-0](#) [1802-0-15-01-43-14-04-0](#) [1802-0-15-80-43-14-04-0](#) [1807-0-15-80-43-14-04-0](#) [1805-0-15-80-43-14-04-0](#) [1806-0-15-80-43-14-04-0](#) [1803-0-15-80-43-14-04-0](#) [1802-0-15-01-32-02-04-0](#) [1802-0-15-80-30-84-04-0](#) [1802-0-15-15-32-14-04-0](#) [1802-0-15-80-30-14-04-0](#) [1802-0-15-01-30-14-04-0](#) [1802-0-15-15-30-27-04-0](#) [1802-0-15-01-32-27-04-0](#) [1802-0-15-80-32-84-04-0](#) [1802-0-15-01-32-14-04-0](#) [1802-0-15-80-30-27-04-0](#) [1802-0-15-15-43-14-04-0](#) [1802-0-15-01-30-27-04-0](#) [1802-0-15-01-30-02-04-0](#) [1802-0-15-80-32-14-04-0](#) [1802-0-15-15-32-27-04-0](#) [1802-0-15-15-30-14-04-0](#) [1802-0-15-80-32-27-04-0](#) [8363-0-15-01-35-14-10-0](#) [1802-0-15-01-30-02-04-4](#) [4030-0-15-01-43-14-04-0](#) [1802-0-15-01-32-14-04-4](#) [4622-0-15-01-30-14-10-0](#) [1802-0-15-80-43-14-04-4](#) [1802-0-15-01-32-02-04-4](#) [1802-0-15-01-43-14-04-4](#) [6252-0-15-80-32-14-10-0](#) [1802-0-15-80-32-84-04-4](#) [1802-0-15-15-32-14-04-4](#) [8363-0-15-80-35-14-10-0](#) [1802-0-15-01-30-27-04-4](#) [1802-0-15-80-32-27-04-4](#) [1802-0-15-15-30-14-04-4](#) [1802-0-15-80-32-14-04-4](#) [8866-0-15-80-43-14-04-0](#) [1802-0-15-01-30-14-04-4](#) [1802-0-15-15-30-27-04-4](#) [1802-0-15-80-30-84-04-4](#) [4622-0-15-80-30-14-10-0](#) [1802-0-15-80-30-14-04-4](#) [6252-0-15-01-32-14-10-0](#) [1802-0-15-80-30-27-04-4](#) [4030-0-15-80-43-14-04-0](#) [8830-0-15-80-22-14-10-0](#) [1802-0-15-01-32-27-04-4](#) [1802-0-15-15-32-27-04-4](#) [8866-0-15-01-43-14-04-0](#)