

# Force Guided Relay SR4 D/M

- 4 pole relay with force guided contacts according to EN EN61810-3 (formerly EN50205)
- **■** Compact design and space efficient

Typical applications

Emergency shut-off, press control, machine control, elevator and escalator control, safety relays



E0244-C








Approvals


VDE Cert. No. 40005334, UL E214025, TUV 968/EL 230, CCC 2019010303217075

Technical data of approved types on request

Contact Data					
Contact arrangement	3 form A + 1 form B contacts				
	3 NO + 1 NC				
	2 form A + 2 form B contacts				
	2 NO + 2 NC				
Rated voltage	250VAC				
Max. switching voltage	400VAC				
Rated current	8A				
Contact material	AgSnO <sub>2</sub>				
Contact style	single contact, force guided				
	type A according to EN61810-3				
	(formerly EN50205)				
Min. recommended contact load	5V/10mA				
Initial contact resistance	≤100mΩ at 1A, 24VDC				
	≤20Ω at 10mA, 5VDC				
Frequency of operation, with/without load 6/150min <sup>-1</sup>					

Contact ratings IEC60947-5-1 AC15-3A on 1 form A (NO) contact DC13-3A






10x10<sup>6</sup> operations Mechanical endurance

Coil data 5 to 110VDC Coil voltage range

Coil versions, DC-coil									
Coil	Rated	Operate	Release	Coil	Rated coil				
code	voltage	voltage	voltage	resistance	power				
	VDC	VDC	VDC	$\Omega \pm 10\%$	mW				
005	5	3.8	0.5	31	806				
006	6	4.5	0.6	45	800				
009	9	6.8	0.9	101	802				
012	12	9.0	1.2	180	800				
015	15	11.3	1.5	281	801				
018	18	13.5	1.8	405	800				
021	21	16.0	2.1	551	800				
024	24	18.0	2.4	720	800				
036	36	27.0	3.6	1620	800				
040	40	30.0	4.0	2000	800				
048	48	36.0	4.8	2880	800				
060	60	45.0	6.0	4500	800				
085	85	63.8	8.5	9031	800				
110	110	83.0	11.0	15125	800				

All figures are given for coil without pre-energization, at ambient temperature +23°C.



Datasheets and product data is subject to the

terms of the disclaimer and all chapters of

the 'Definitions' section, available at

http://relays.te.com/definitions

S0413-BB

S0413-BA



## Force Guided Relay SR4 D/M (Continued)

PCB layout / terminal assignment

2 form A + 2 form B. 2 NO + 2 NC contacts

Bottom view on solder pins

#### **Insulation Data** 1500Vrms between open contacts between contact and coil 4000Vrms between adjacent contacts 2500Vrms between open contacts microdisconnection between contact and coil ≥10/10mm between adjacent contacts ≥3/3.5mm between contact and coil reinforced

# Initial dielectric strenath Clearance/creepage Insulation to EN 50178, type of insulation between adjacent contacts basic

# Ø1,3<sup>+0,1</sup> S0413-BC





For more detailed information see product specification 2158002

# 3 form A + 1 form B, 3 NO + 1 NC contacts

### **Dimensions**

**Other Data** 

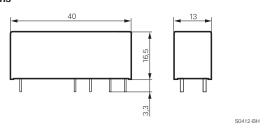

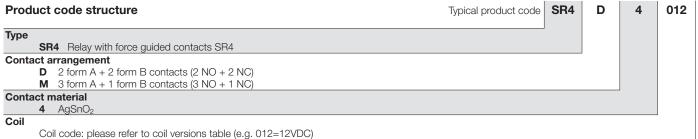

Other types on request



# Force Guided Relay SR4 D/M (Continued)

Product code	Туре	Contact arrangement	Contact material	Coil	Part number
SR4D4005	4 pole	2 form A + 2 form B,	AgSnO <sub>2</sub>	5VDC	7-1415054-1
SR4D4006	relay with	2 NO + 2 NC		6VDC	8-1415054-1
SR4D4009	force guided contacts	contacts		9VDC	9-1415054-1
SR4D4012				12VDC	1415055-1
SR4D4018				18VDC	1-1415055-1
SR4D4021				21VDC	2-1415055-1
SR4D4024				24VDC	3-1415055-1
SR4D4036				36VDC	4-1415055-1
SR4D4040				40VDC	5-1415055-1
SR4D4048				48VDC	6-1415055-1
SR4D4060				60VDC	7-1415055-1
SR4D4085				85VDC	8-1415055-1
SR4D4110				110VDC	9-1415055-1
SR4M4005		3 form A + 1 form B,		5VDC	5-1415053-1
SR4M4006		3 NO + 1 NC		6VDC	6-1415053-1
SR4M4009		contacts		9VDC	7-1415053-1
SR4M4012				12VDC	8-1415053-1
SR4M4018				18VDC	9-1415053-1
SR4M4021				21VDC	1415054-1
SR4M4024				24VDC	4-1415053-1
SR4M4036				36VDC	1-1415054-1
SR4M4040				40VDC	2-1415054-1
SR4M4048				48VDC	3-1415054-1
SR4M4060				60VDC	4-1415054-1
SR4M4085				85VDC	5-1415054-1
SR4M4110				110VDC	6-1415054-1