

C-MOS QUAD SPST ANALOG SWITCH

■ GENERAL DESCRIPTION


The NJU201A is a quad break-before-make SPST analog switch protected up to 44V operating voltage.

All switches are controlled by TTL or C-MOS compatible input.

The low on-state resistance is about half compare with the NJU7301.

The NJU201A is functionally and pin-to-pin compatible with SILICONIX DG201A.

■ PACKAGE OUTLINE




NJU201AD

NJU201AM

■ FEATURES

- High Break Down Voltage -- 44V
- Low On-state Resistance
- Package Outline
- -- DIP/DMP 16
- C-MOS Technology


■ PIN CONFIGURATION



TRUTH TABLE

Logic (In)	Switch
0	ON
1	OFF

■ EQUIVALENT CIRCUIT

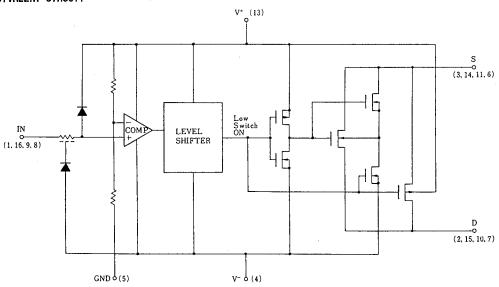

* Logic input threshold voltage $V_{\rm TH}$ is about V^+ x 0.128(V). When the designing, enough margin is required.



■ TERMINAL DESCRIPTION

No.	SYMBOL	FUNCTION	No.	SYMBOL	FUNCTION
1	IN1	Control Signal Input	9	1 N3	Control Signal Input
2	D1	Innut (0tmt 1	10	D3	1
3	S 1	Input/Output 1	11	S 3	Input/Output 3
4	V ⁻	Negative (V ⁻) Power Supply	12	NC	Non Connection
5	GND	Ground	13	V +	Positive (V ⁺) Power Supply
6	S4	lance /Outace 4	14	S2	1
7	D4	Input/Output 4	15	D2	Input/Output 2
8	1 N4	Control Signal Input	16	1N2	Control Signal Input

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25℃)

PARAMETER	SYMBOL	RATINGS	UNIT
	V+ - V-	44	
Supply Voltage	V ⁺ - GND	19	٧
	GND - V	25	
Input Voltage	V _I ,V _S ,V _D	V ⁻ -0.5 ~ V ⁺ +0.5 *	٧
	I I	30	mA
Input Current	Is,ID Continuous	20	
	Peak Value (PW=1ms,Duty0.1)	70	
Power Dissipation	P _D	500 (DIP)/ 200 (DMP)	mW
Operating Temperature Range	Topr	0 ~+ 70	Ç
Storage Temperature Range	Tstg	- 65 ~ + 125	ပ

^{*} $V^++0.5V$ must be 44V or less.



■ ELECTRICAL CHARACTERISTICS (DC CHARACTERISTICS)

($V^{+}=15V$, $V^{-}=-15V$, GND=0V)

	SYMBOL	CONDITIONS		TYP		MAX		UNIT	
PARAMETER				25℃	0℃	25℃	70 ℃	UNII	
Analog Signal Range	Vanalog			±15		±15	±15	٧	
On-state Resistance	Ron	V _{1N} =0.8V	V _D =10V	50	100	100	125	Ω	
		1s=-1mA	V _D =-10V	50	100	100	125		
Source-off	1 ((()	V =0 4V	Vs=14V,VD=-14V	0.01		5	100		
Leakage Current	ls(off)	V:=2.4V	V _S =-14V, V _D =14V	-0.02		- 5	-100	nA	
Drain-off	I _D (off) V ₁ =2.4	U 0 414	VD=14V, VS=-14V	0.01		5	100	1	
Leakage Current		ID(OTT)	1D(0TT)	V:=2.4V	V _D =-14V, V _S =14V	-0.02		- 5	-100
Drain-on	1 ()	V₁=0.8V ⊢	V _D =V _S =14V	0.1		5	200	nA.	
Leakage Current	l _D (on)		VD=VS=-14V	-0.15		- 5	-200	IIA	
Input Current	I I H	V:=2.4V		-0.0004		- 1	- 10	μA	
		V :=15V		0.003		1	10		
	l 1 L	V ₁ =0V		-0.0004		- 1	- 10		
0	. 1+	V:=0 or 2.4V		0.9		2		mA	
Quiescent Current	1-			-0.3		- 1			

SWITCHING CHARACTERISTICS

($V^{+}=15V$, $V^{-}=-15V$, GND=0V)

	avuno.	0.0 11.0	CONDITIONS		MAX			IINIT						
PARAMETER	SYMBOL	CUND			0℃	25℃	70℃	UNIT						
Turn-on Time	ton	R _L =1kΩ, G _L =35pF		480		600								
Turn-off Time	toff	KL=IK32,	GL-SOPF	370		450		ns						
Charge Injection	Q	$C_{\rm L} = 1000 \mbox{pF}$, $V_{\rm GEN} = 0 \mbox{V}$, $R_{\rm GEN} = 0 \Omega$		20				рС						
Source-Off Capacit.	Cs(off)		V _s =0V, V _I =5V	5										
Drain-Off Capacit.	CD(off)	f=100kHz	£=1001.U=	£=1001.U=	f=100kU→	£=1001.U=	£=1001.U-	£=1001.U=	V _D =0V, V _I =5V	5				pF
Channel-On Capacitance	C _D (on) +C _S (on)		V _D =V _S =0V, V _I =0V	16				P1						
Off Isolation	OIRR	V =2V	s=2V _{P−P} , f=100kHz, L=75Ω	70				dB						
Channel-to-channel Crosstalk	CCRR	Vs=2Vp-p, R _L =75Ω		90				ub.						

NJU201A

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

NJU201AD NJU201AM NJU201AM-TE2 NJU201AM-TE1