


LFB155G37CB1C032

In Production Recommended RoHS REACH

Appearance & Shape

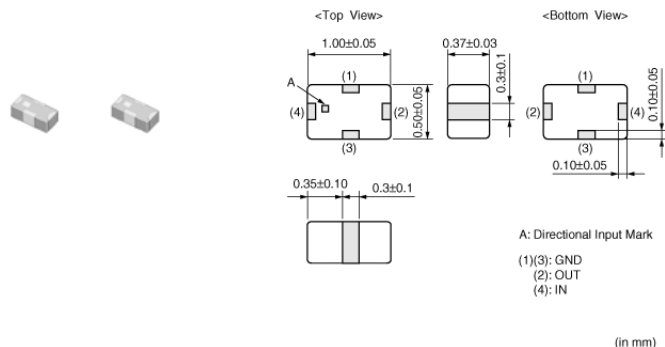

Features

Ultra-small, low-profiled, lightweight chip filters based on ceramic multilayer technology.

Extremely ultra-small band-pass filters.

1. Ultra-small, low-profiled, lightweight band-pass filters.
2. Absolutely no adjustment required.
3. Reflow solderable.
4. Available in tape and reel packagings for automatic mounting.
5. Available in the 4900MHz to 5850MHz frequency range.

Packaging Information

Packaging	Specifications	Minimum Order Quantity
-	180mm Paper Tape	10000

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

LFB155G37CB1C032



Specifications

Applications	WLAN BT
Nominal Center Frequency(fo)	5375.00MHz
Bandwidth(BW)	fo±475.00MHz
Insertion Loss in BW I)	1.50dB max. (at 25°C)
Insertion Loss in BW II)	1.70dB max. (-40 to +85°C)
Attenuation(Absolute Value)I)	10.0dB min. at 3800.00MHz
Attenuation(Absolute Value)II)	5.0dB min. at 7500.00MHz
VSWR(max.)	2.1
Characteristic Impedance(Nom.)	50Ω
Power Capacity	500mW
Operating Temperature Range	-40°C to 85°C
L x W (size)	1.00x0.50mm
Thickness(max.)	0.4mm


Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2.This datasheet has only typical specifications because there is no space for detailed specifications.
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

LFB155G37CB1C032

Product Data

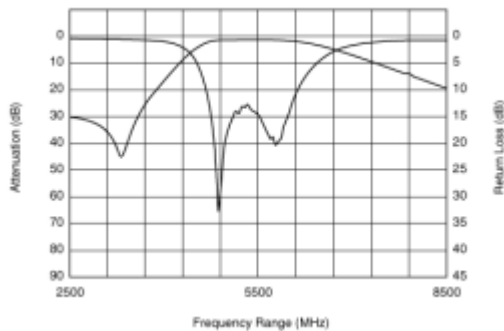

Frequency Characteristics

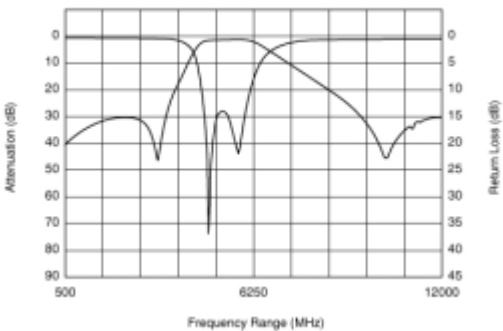

Spurious Response

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

[LFB315G82SN5A549](#) [LFB43815MAA1-385](#) [LFB32315MSC1-604](#) [LFB431G84SN1-651](#) [LFB32836MSA1-747](#)
[LFB32881MSA1-781](#) [LFB43458MAB1-643](#) [LFB311G50SL1A500](#) [LFB311G40SL1A562](#) [LFB315G82SN5-996](#)
[LFB32915MSC2-992](#) [LFB312G45SP1A559](#) [LFB31915MSL1A508](#) [LFB431G54SN1A-379](#) [LFB432G44AJ1-334](#)
[LFB432G45SN1-629](#) [LFB32205MSK1-948](#) [LFB31847MSL1-979](#) [LFB321G74SN1-770](#) [LFB321G84SN1-796](#)
[LFB31847MSL1A585](#) [LFB311G48SG1-985](#) [LFB315G51SN5A577](#) [LFB315G51SN5A533](#) [LFB43435MAB1-217](#)
[LFB321G66SB1-560](#) [LFB32739MSA1-800](#) [LFB32967MSA1A514](#) [LFB32350MSC1-772](#) [LFB322G45SN1-947](#)
[LFB321G96SG4A524](#) [LFB312G33SG2A602](#) [LFB311G46SG1A578](#) [LFB311G44SG1A558](#) [LFB311G89SP1A542](#)
[LFB32942MSC2A516](#) [LFB212G45BA1A235](#) [LFB215G51SG8A154](#) [LFB322G45SN1A504](#) [LFB32615MSC1-782](#)
[LFB182G45SG9A293](#) [LFB182G45SG9B740](#) [LFB185G73SGCB774](#) [LFB185G78SGAB790](#) [LFB212G45SG8A125](#)
[LFB212G45SG8A131](#) [LFB212G45SG8B742](#) [LFB32800MSC2-965](#) [LFB32871MSA1A595](#) [LFB431G54SN1-822](#)
[LFB315G51SG2A601](#) [LFB321G64SN4-761](#) [LFB182G45BG4D268](#)