


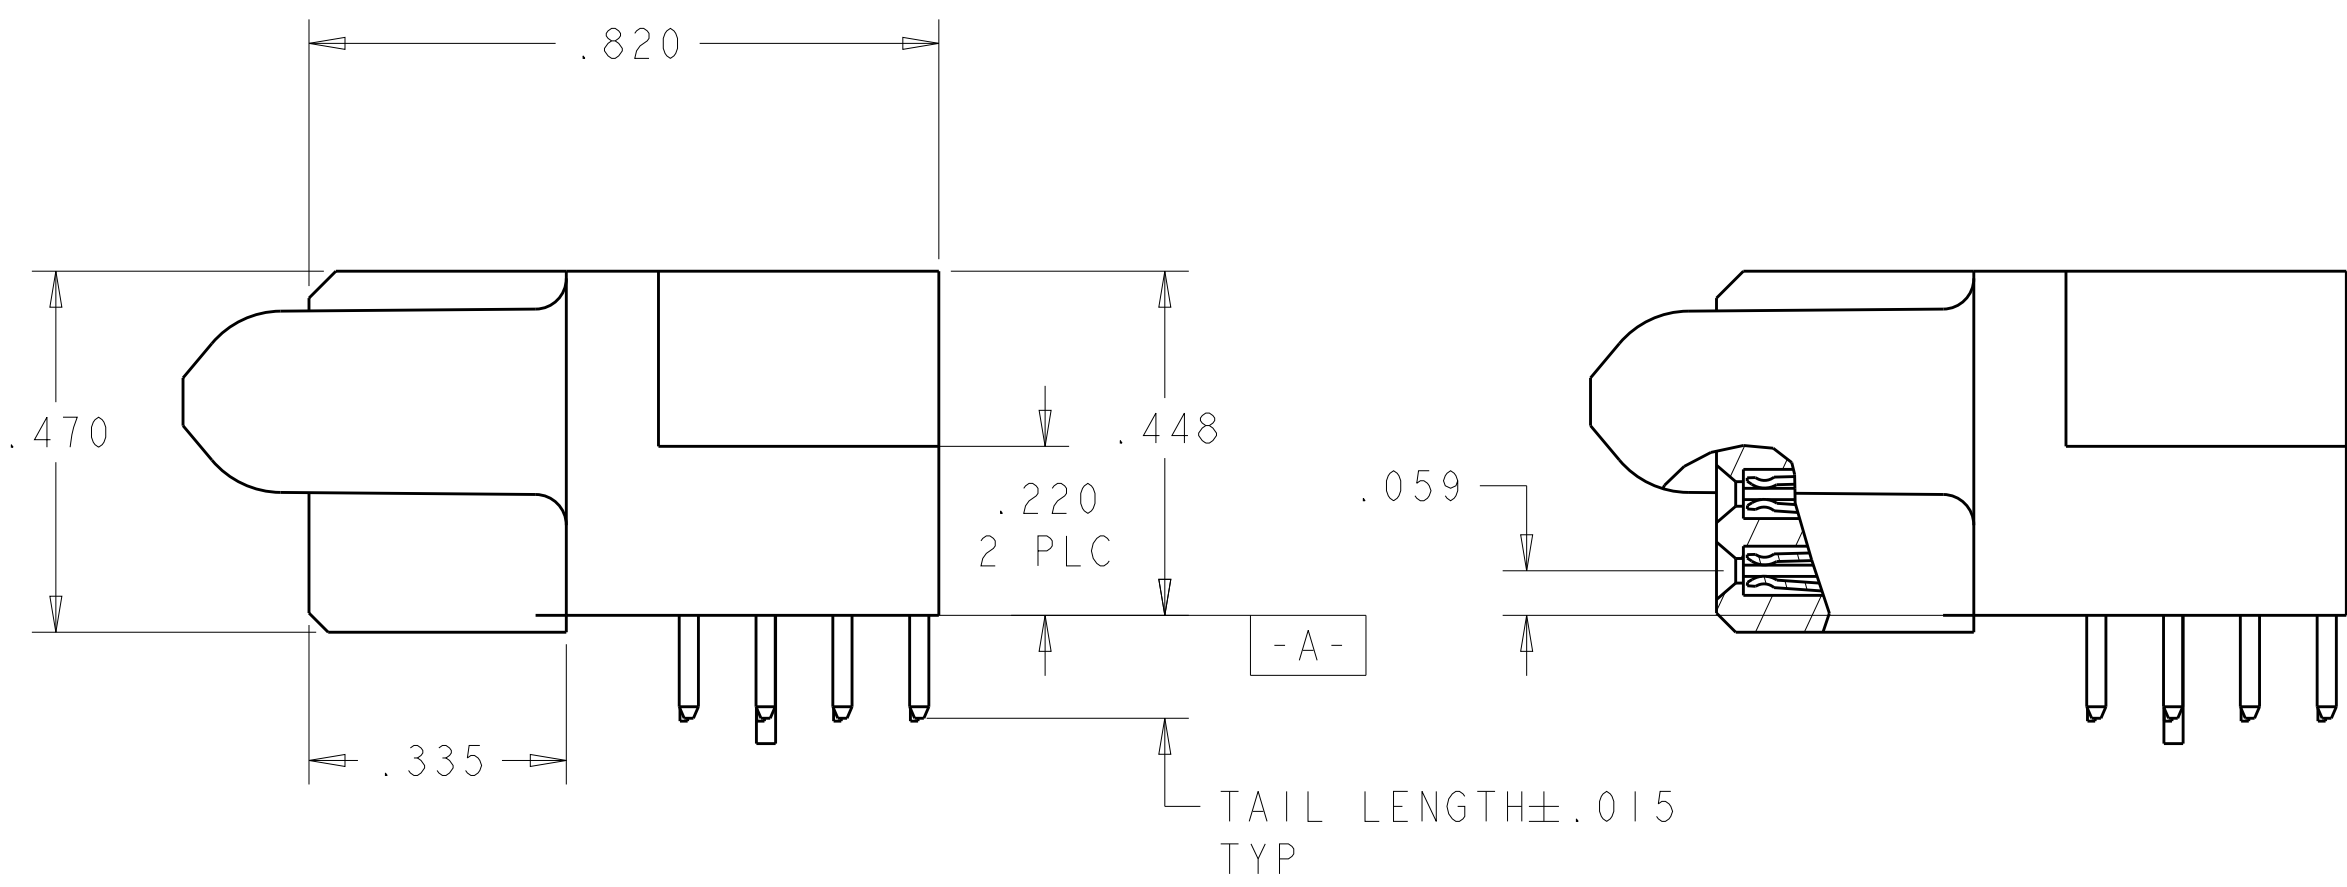


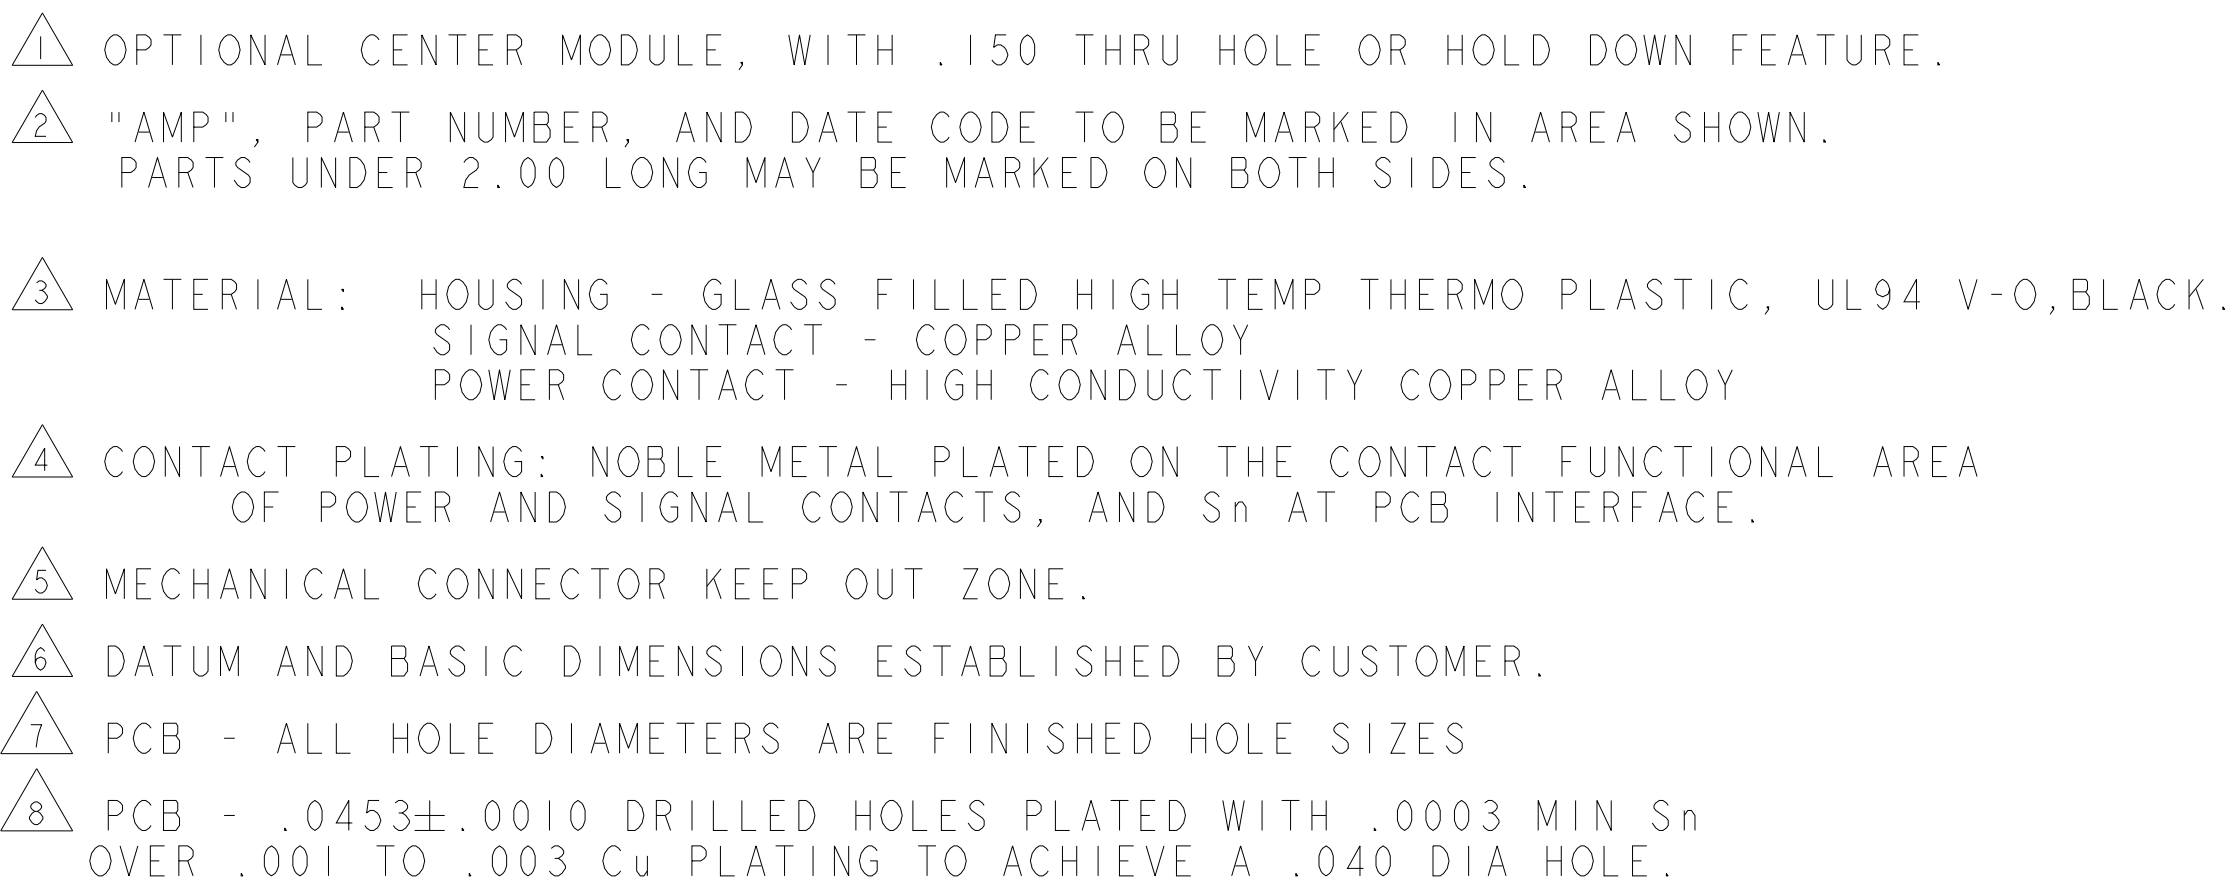

C7	4.125	.300	.250	2.775	1.900	4.175	-	4.475	.475	5ACP + 32S + 6P	1-6450370-4
	1.600	-	-	1.500	.625	1.650	-	1.950	.450	1P + 32S + 1P	1-6450370-3
	7.350	-	-	5.225	3.925	7.400	-	7.700	.475	12P + 48S + 8P	1-6450370-2
	2.400	.200	.200	2.100	.825	2.450	-	2.750	.450	2P + 48S + 2P	1-6450370-1
	1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 24S + 1P	1-6450370-0
	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	6450370-9
	2.800	.250	.300	1.950	1.275	2.850	-	3.150	.475	3ACP + 24S + 4P	6450370-5
	3.150	.250	.250	2.300	1.625	3.200	-	3.500	.450	5P+24S+4P	6450370-4
	1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P+24S+1P	6450370-3
	2.500	.300	.250	1.800	1.125	2.550	-	2.850	.450	3P+24S+3ACP	6450370-2
	2.550	.250	.300	2.200	1.525	2.600	-	2.900	.475	3ACP+1P+24S+2P	6450370-1
	DIM. U	DIM. T	DIM. S	DIM. R	DIM. W	DIM. D	DIM. M	DIM. L	DIM. K	DESCRIPTION	PART NUMBER

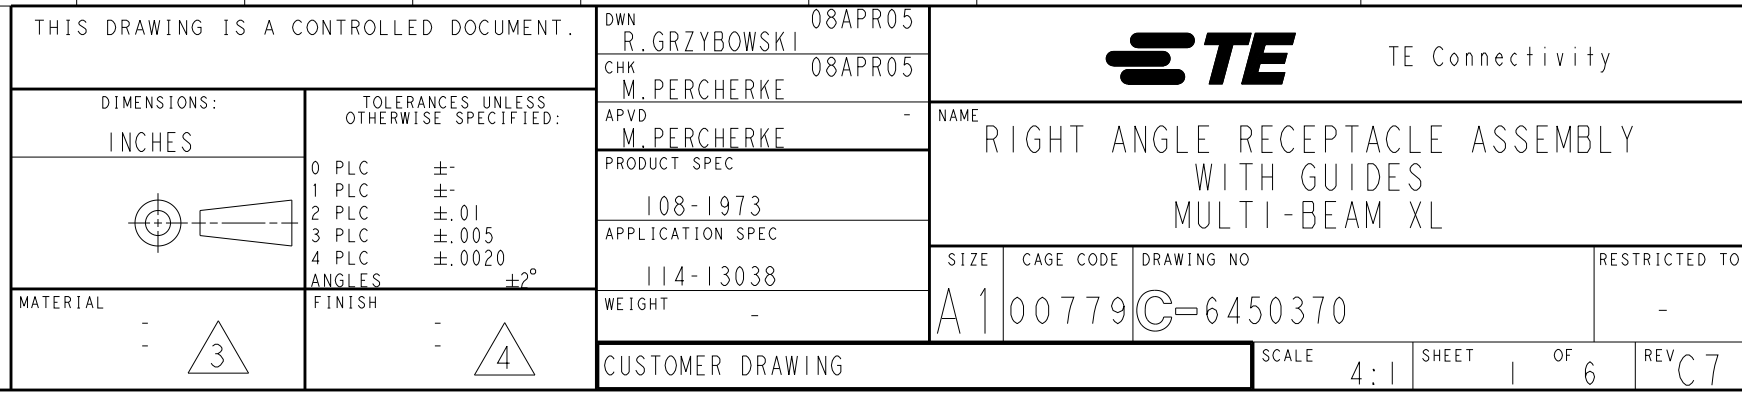


PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	
6450370-2	D C B A		 RM	 RM	 RM	 H	 H	 H	 H	 H	 H	 RM	 RM	 RA	
3P + 24S + 3ACP						 E	 E	 E	 E	 E	 E				

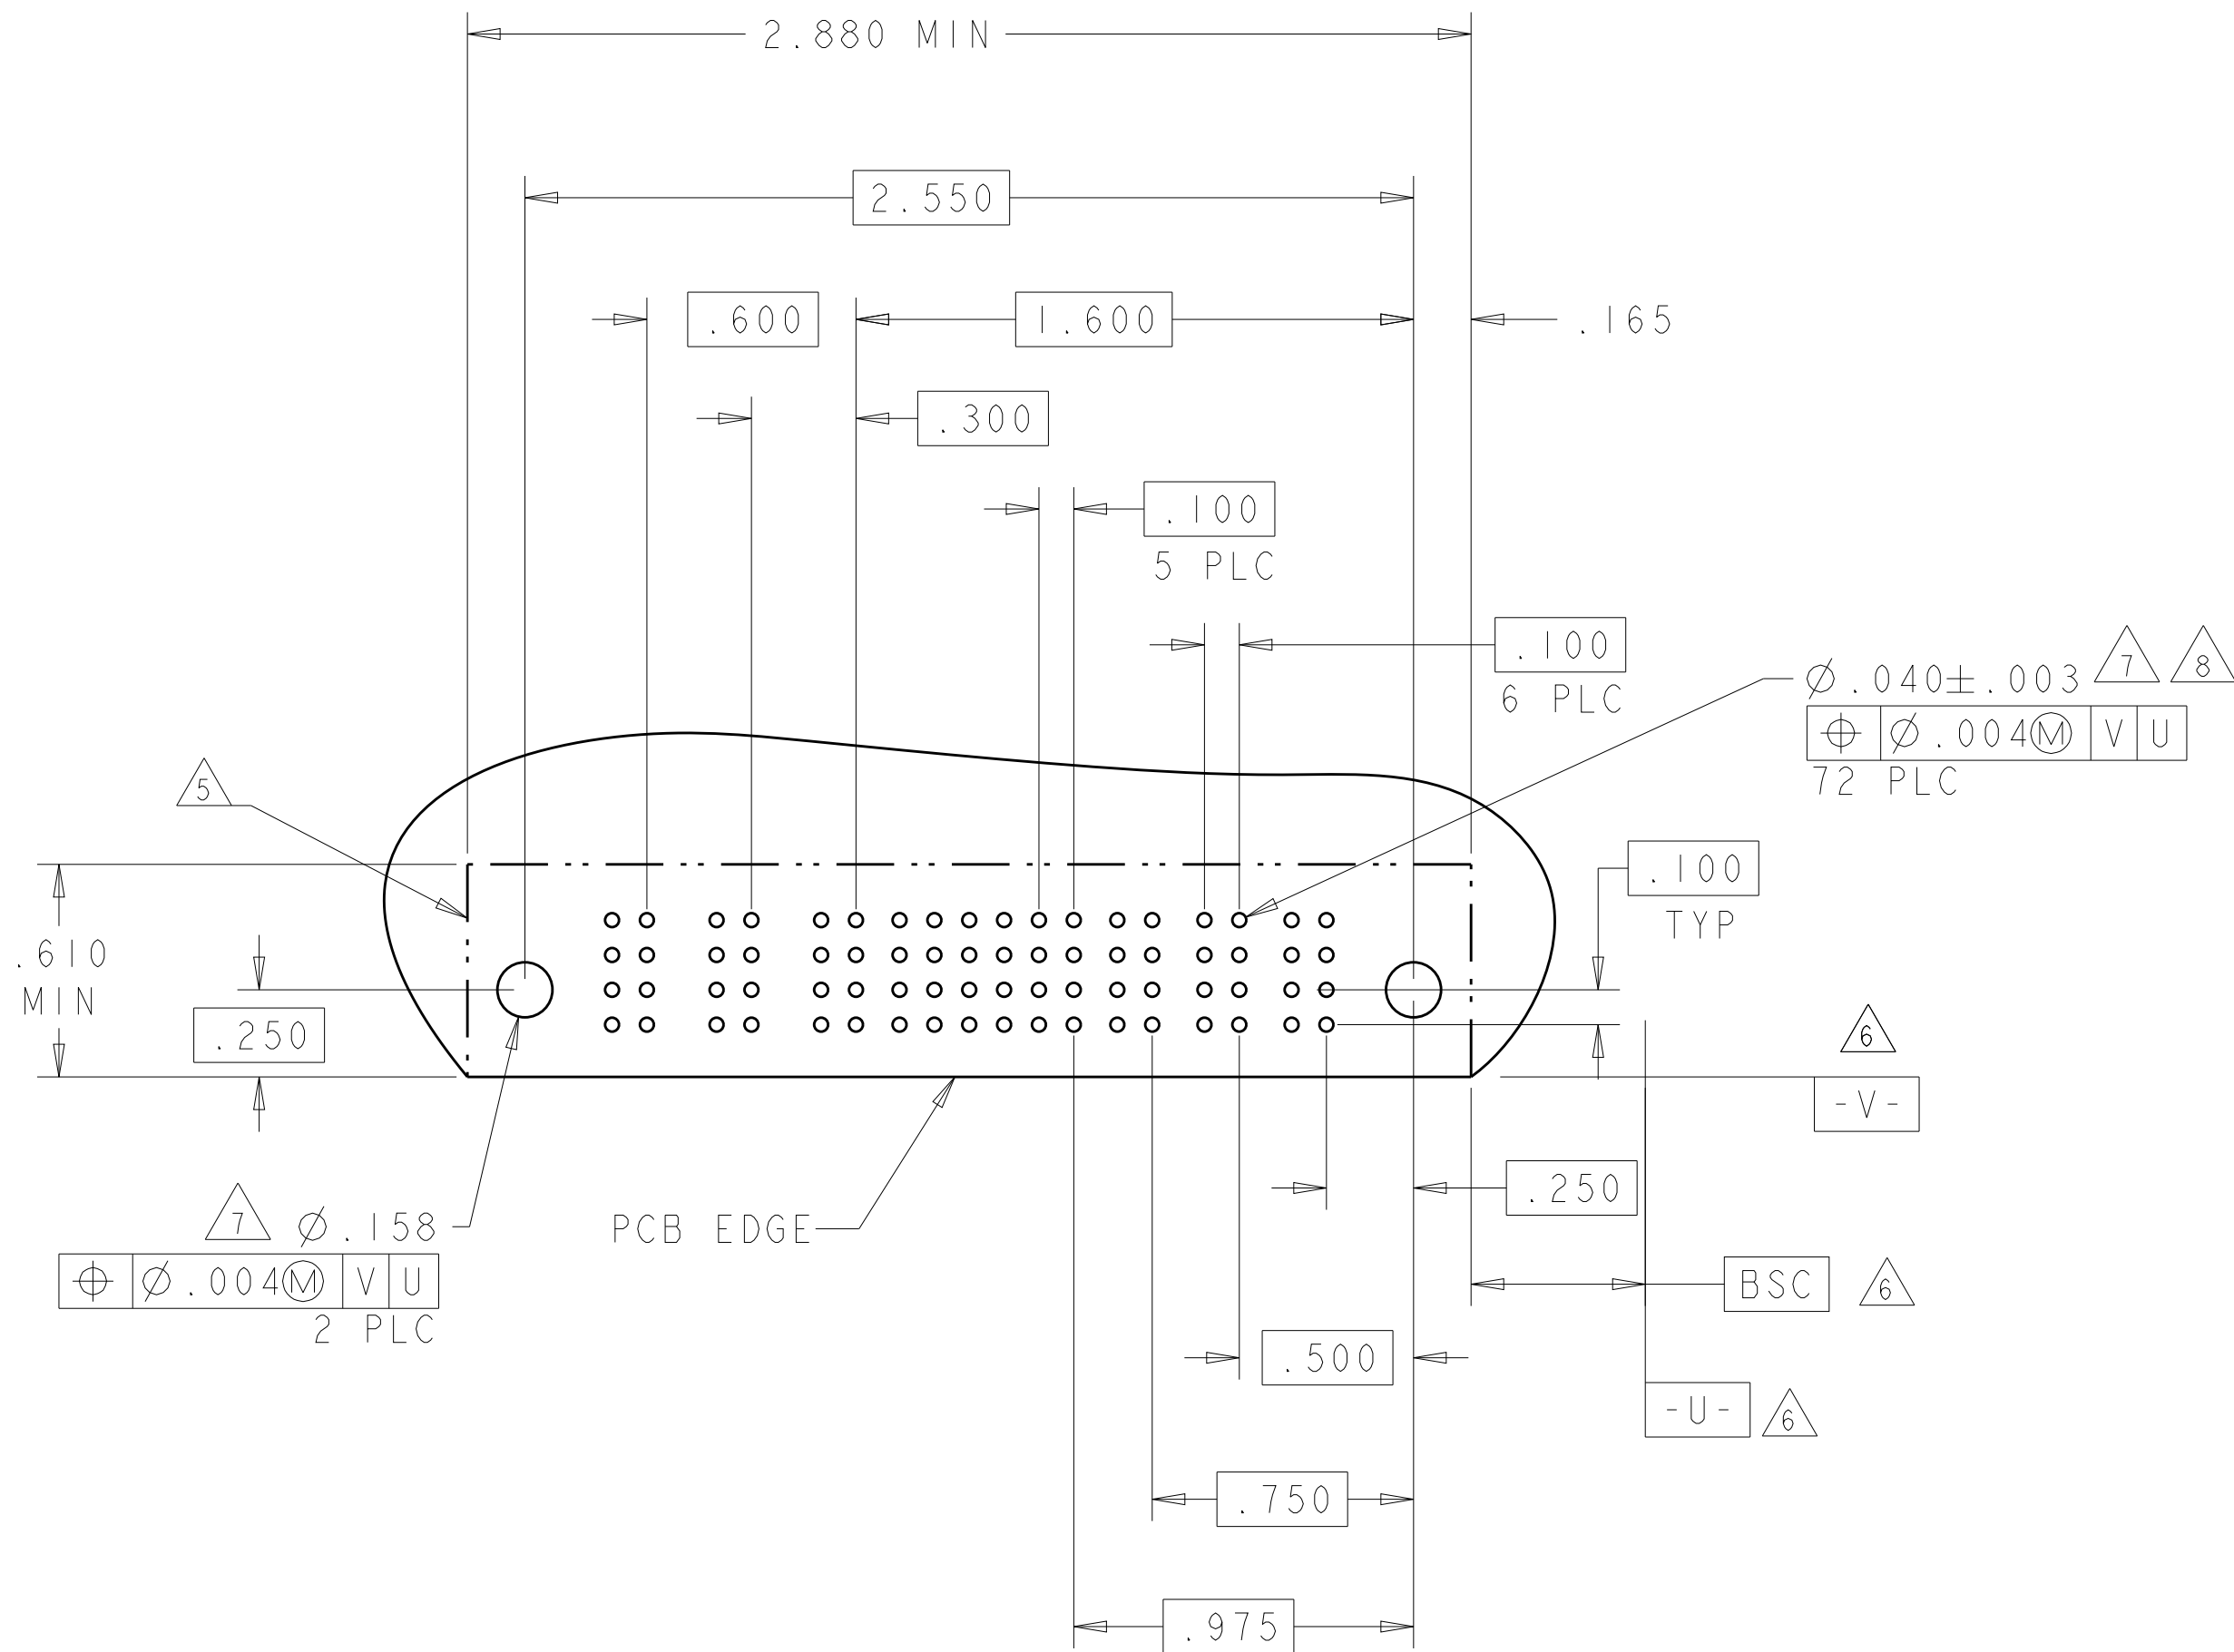


RB	.090	MFB
RN	.090	STD
RA	.135	MFB
RM	.135	STD
CODE	TAIL LENGTH	DESCRIPTION
POWER CONTACT		


L	.090	D
K	.090	C
J	.090	B
I	.090	A
H	.135	D
G	.135	C
F	.135	B
E	.135	A
CODE	TAIL LENGTH	ROW
SIGNAL CONTACT		

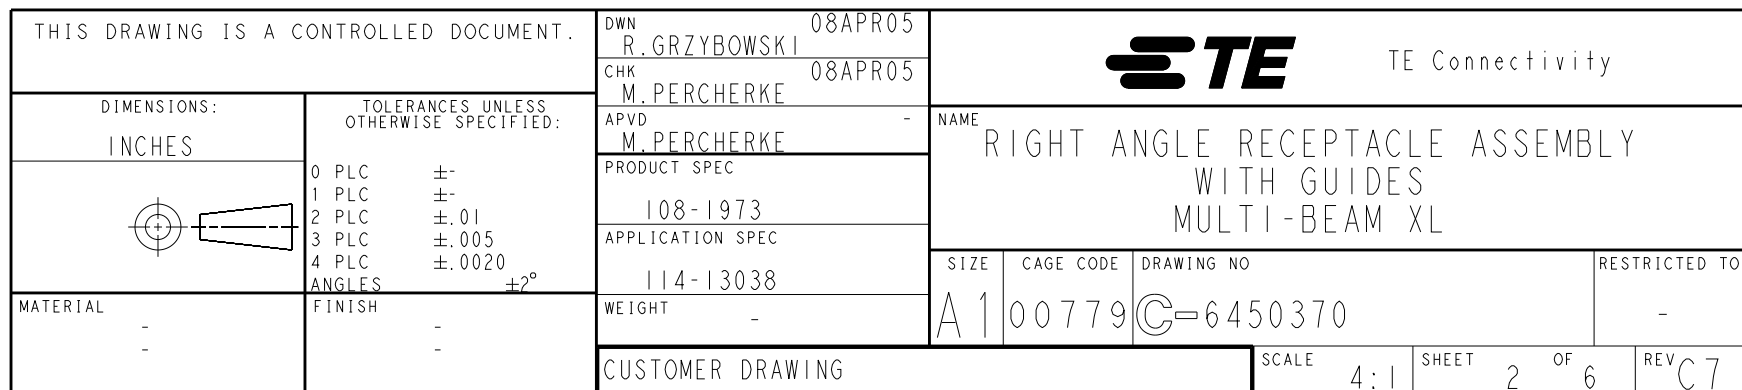

PART NUMBER	ROWS		POWER				SIGNAL						POWER			
			P7	P6	P5	P4	P6	5	4	3	2	1	P3	P2	P1	
6450370-5	D C B A					H	H	H	H	G	H	G				
						G	G	G	G	G	G	G				
						F	F	F	F	F	F	F				
						E	E	E	E	E	E	E				
3ACP + 24S + 4P																

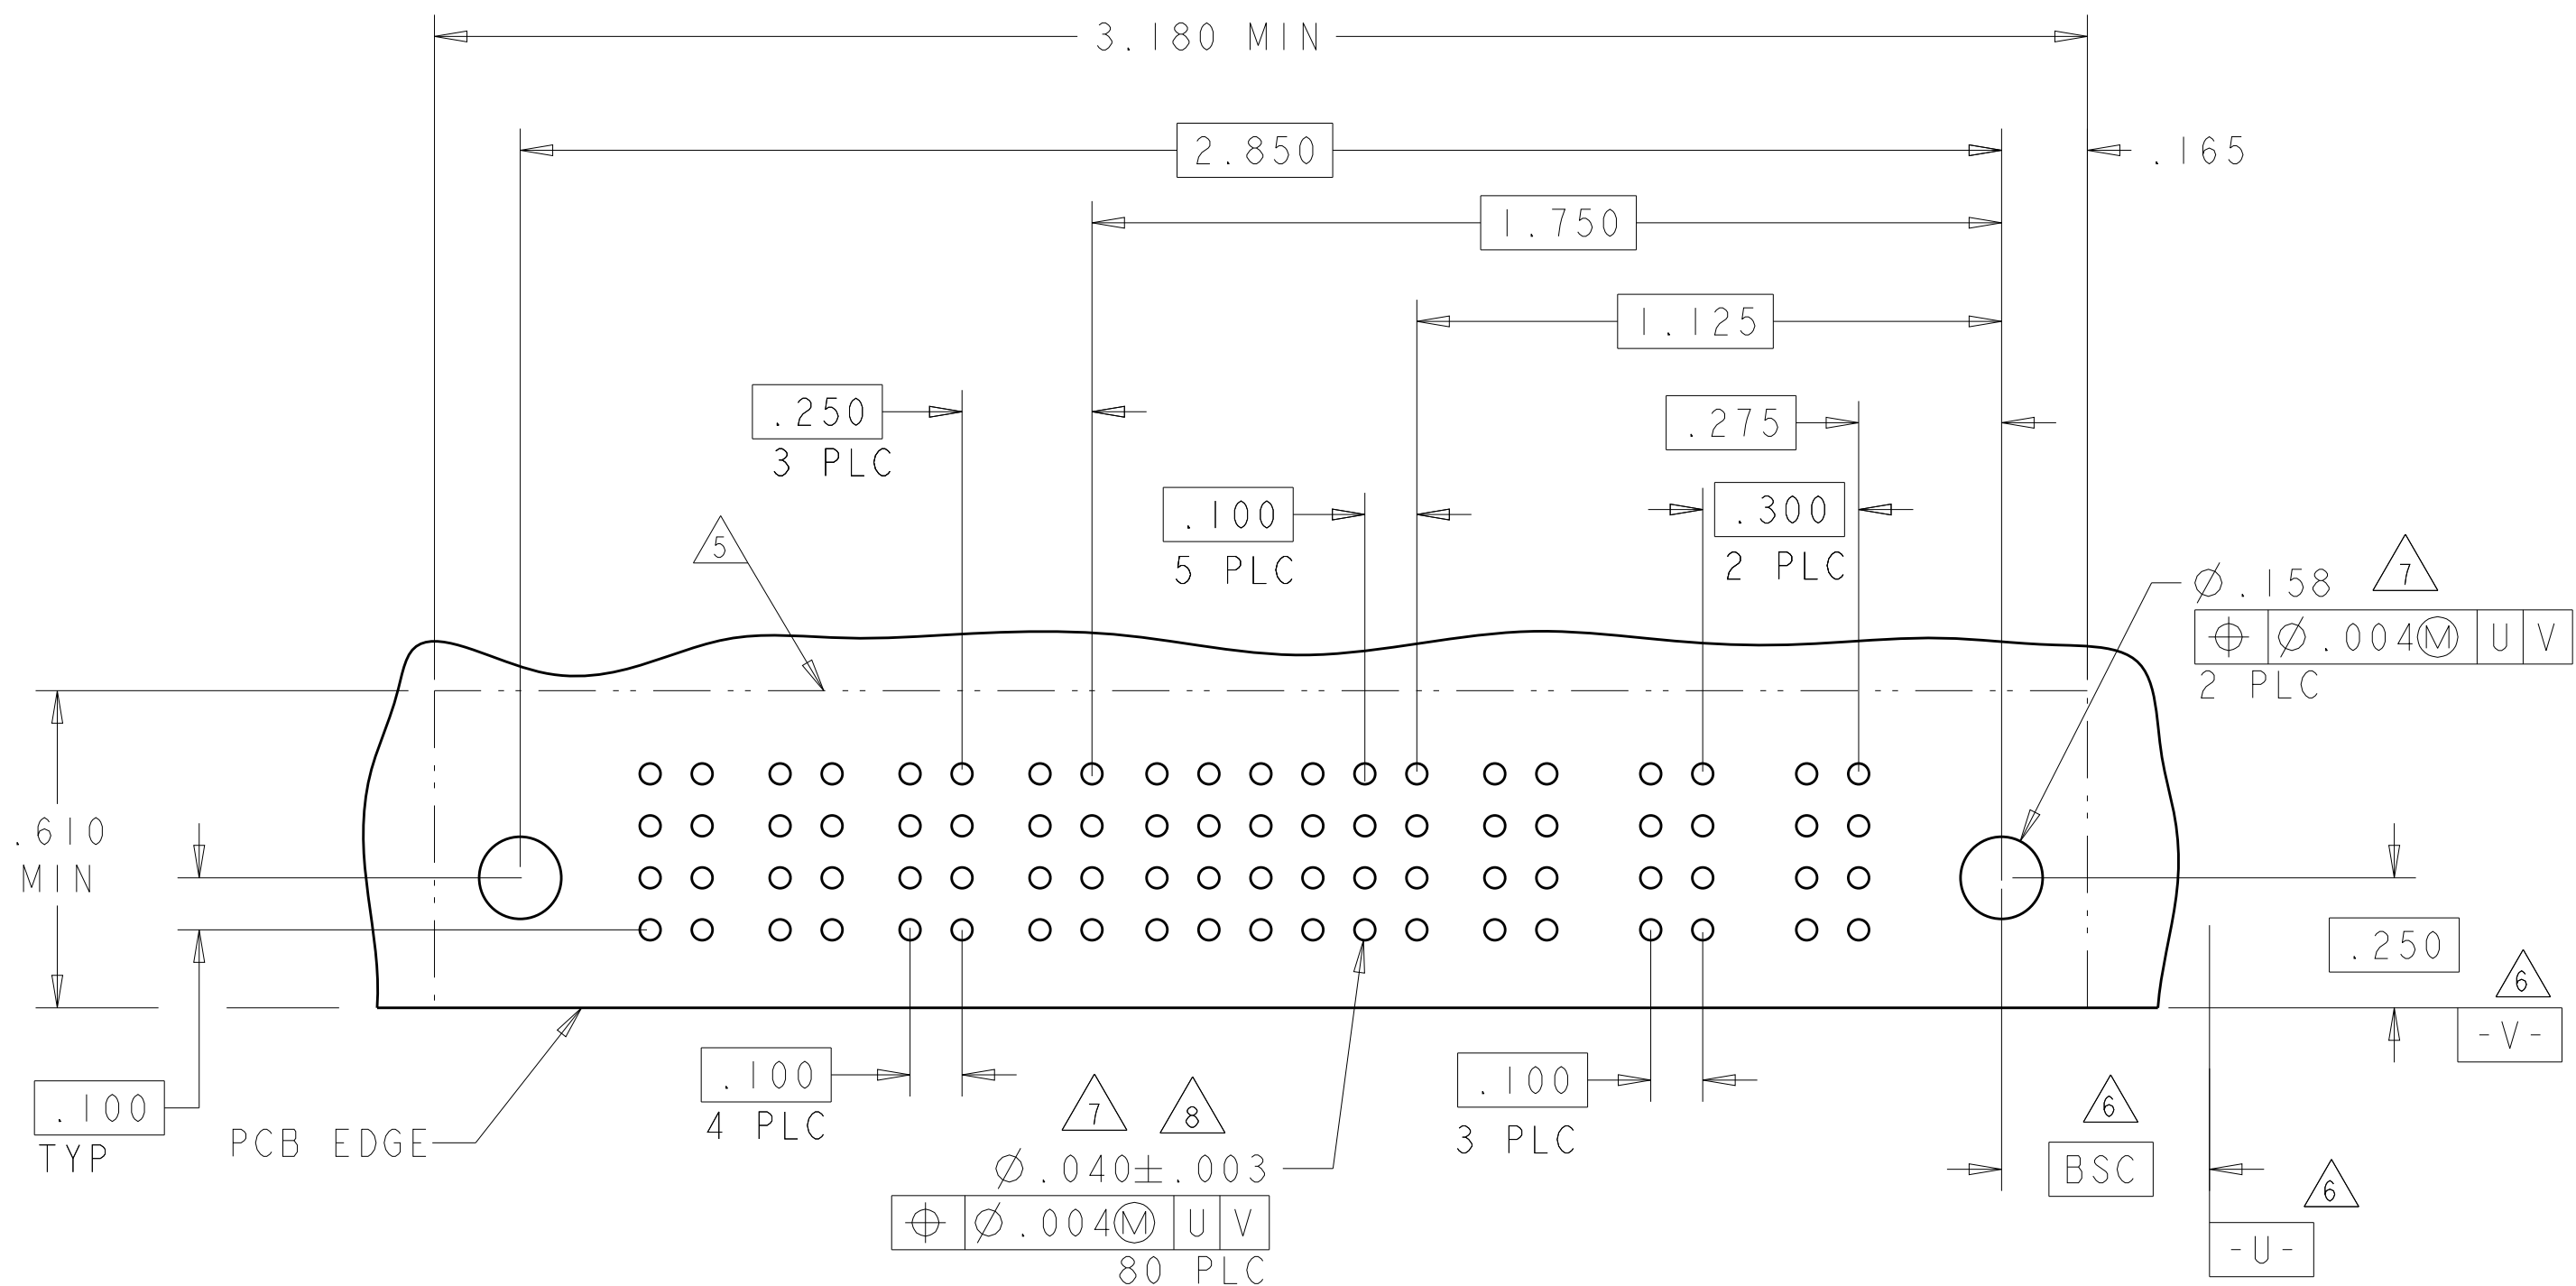


PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P2	4	3	2	1	P1			
I-6450370-0	D C B A			H	H	H	H	G			
				G	G	G	G	F			
				F	F	F	F	E			
				E	E	E	E				
IP + 16S + IP											

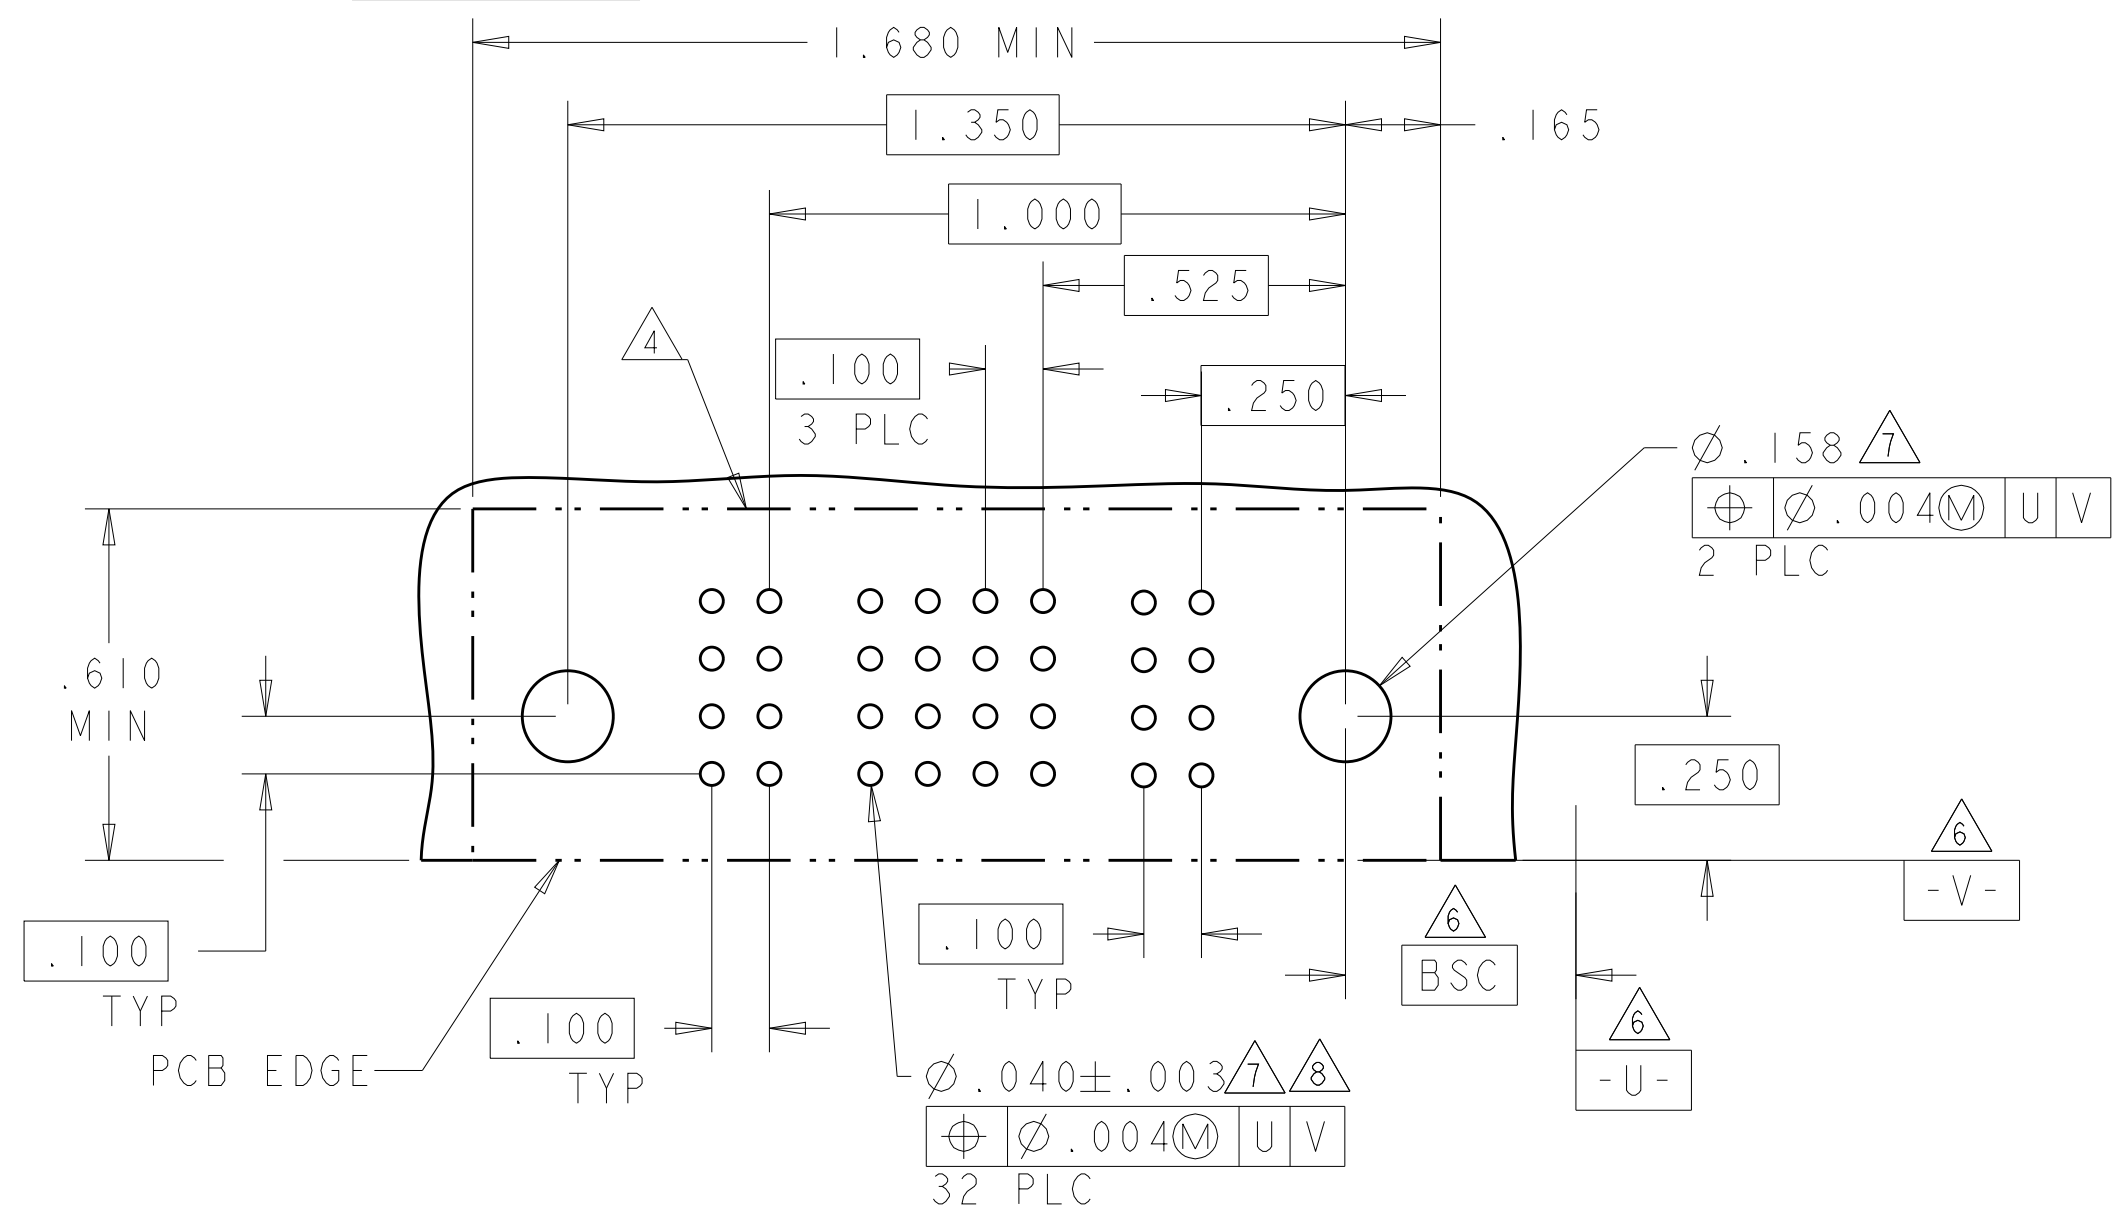4805 (3/11)

LOC		DIST		REVISONS			
ES		00		P	LTR	DESCRIPTION	DATE
							DWN
							APVD


PART NUMBER	ROWS		POWER		SIGNAL											POWER			
			P4	P3	I2	I1	I0	9	8	7	6	5	4	3	2	I	P2		P1
1-6450370-1	D		RM	RA	H	H	H	H	H	H	H	H	H	H	H	H	RA	RM	
	G				G	G	G	G	G	G	G	G	G	G	G				
	F				F	F	F	F	F	F	F	F	F	F	F	F			
	E				E	E	E	E	E	E	E	E	E	E	E	E			
2P + 48S + 2P																			

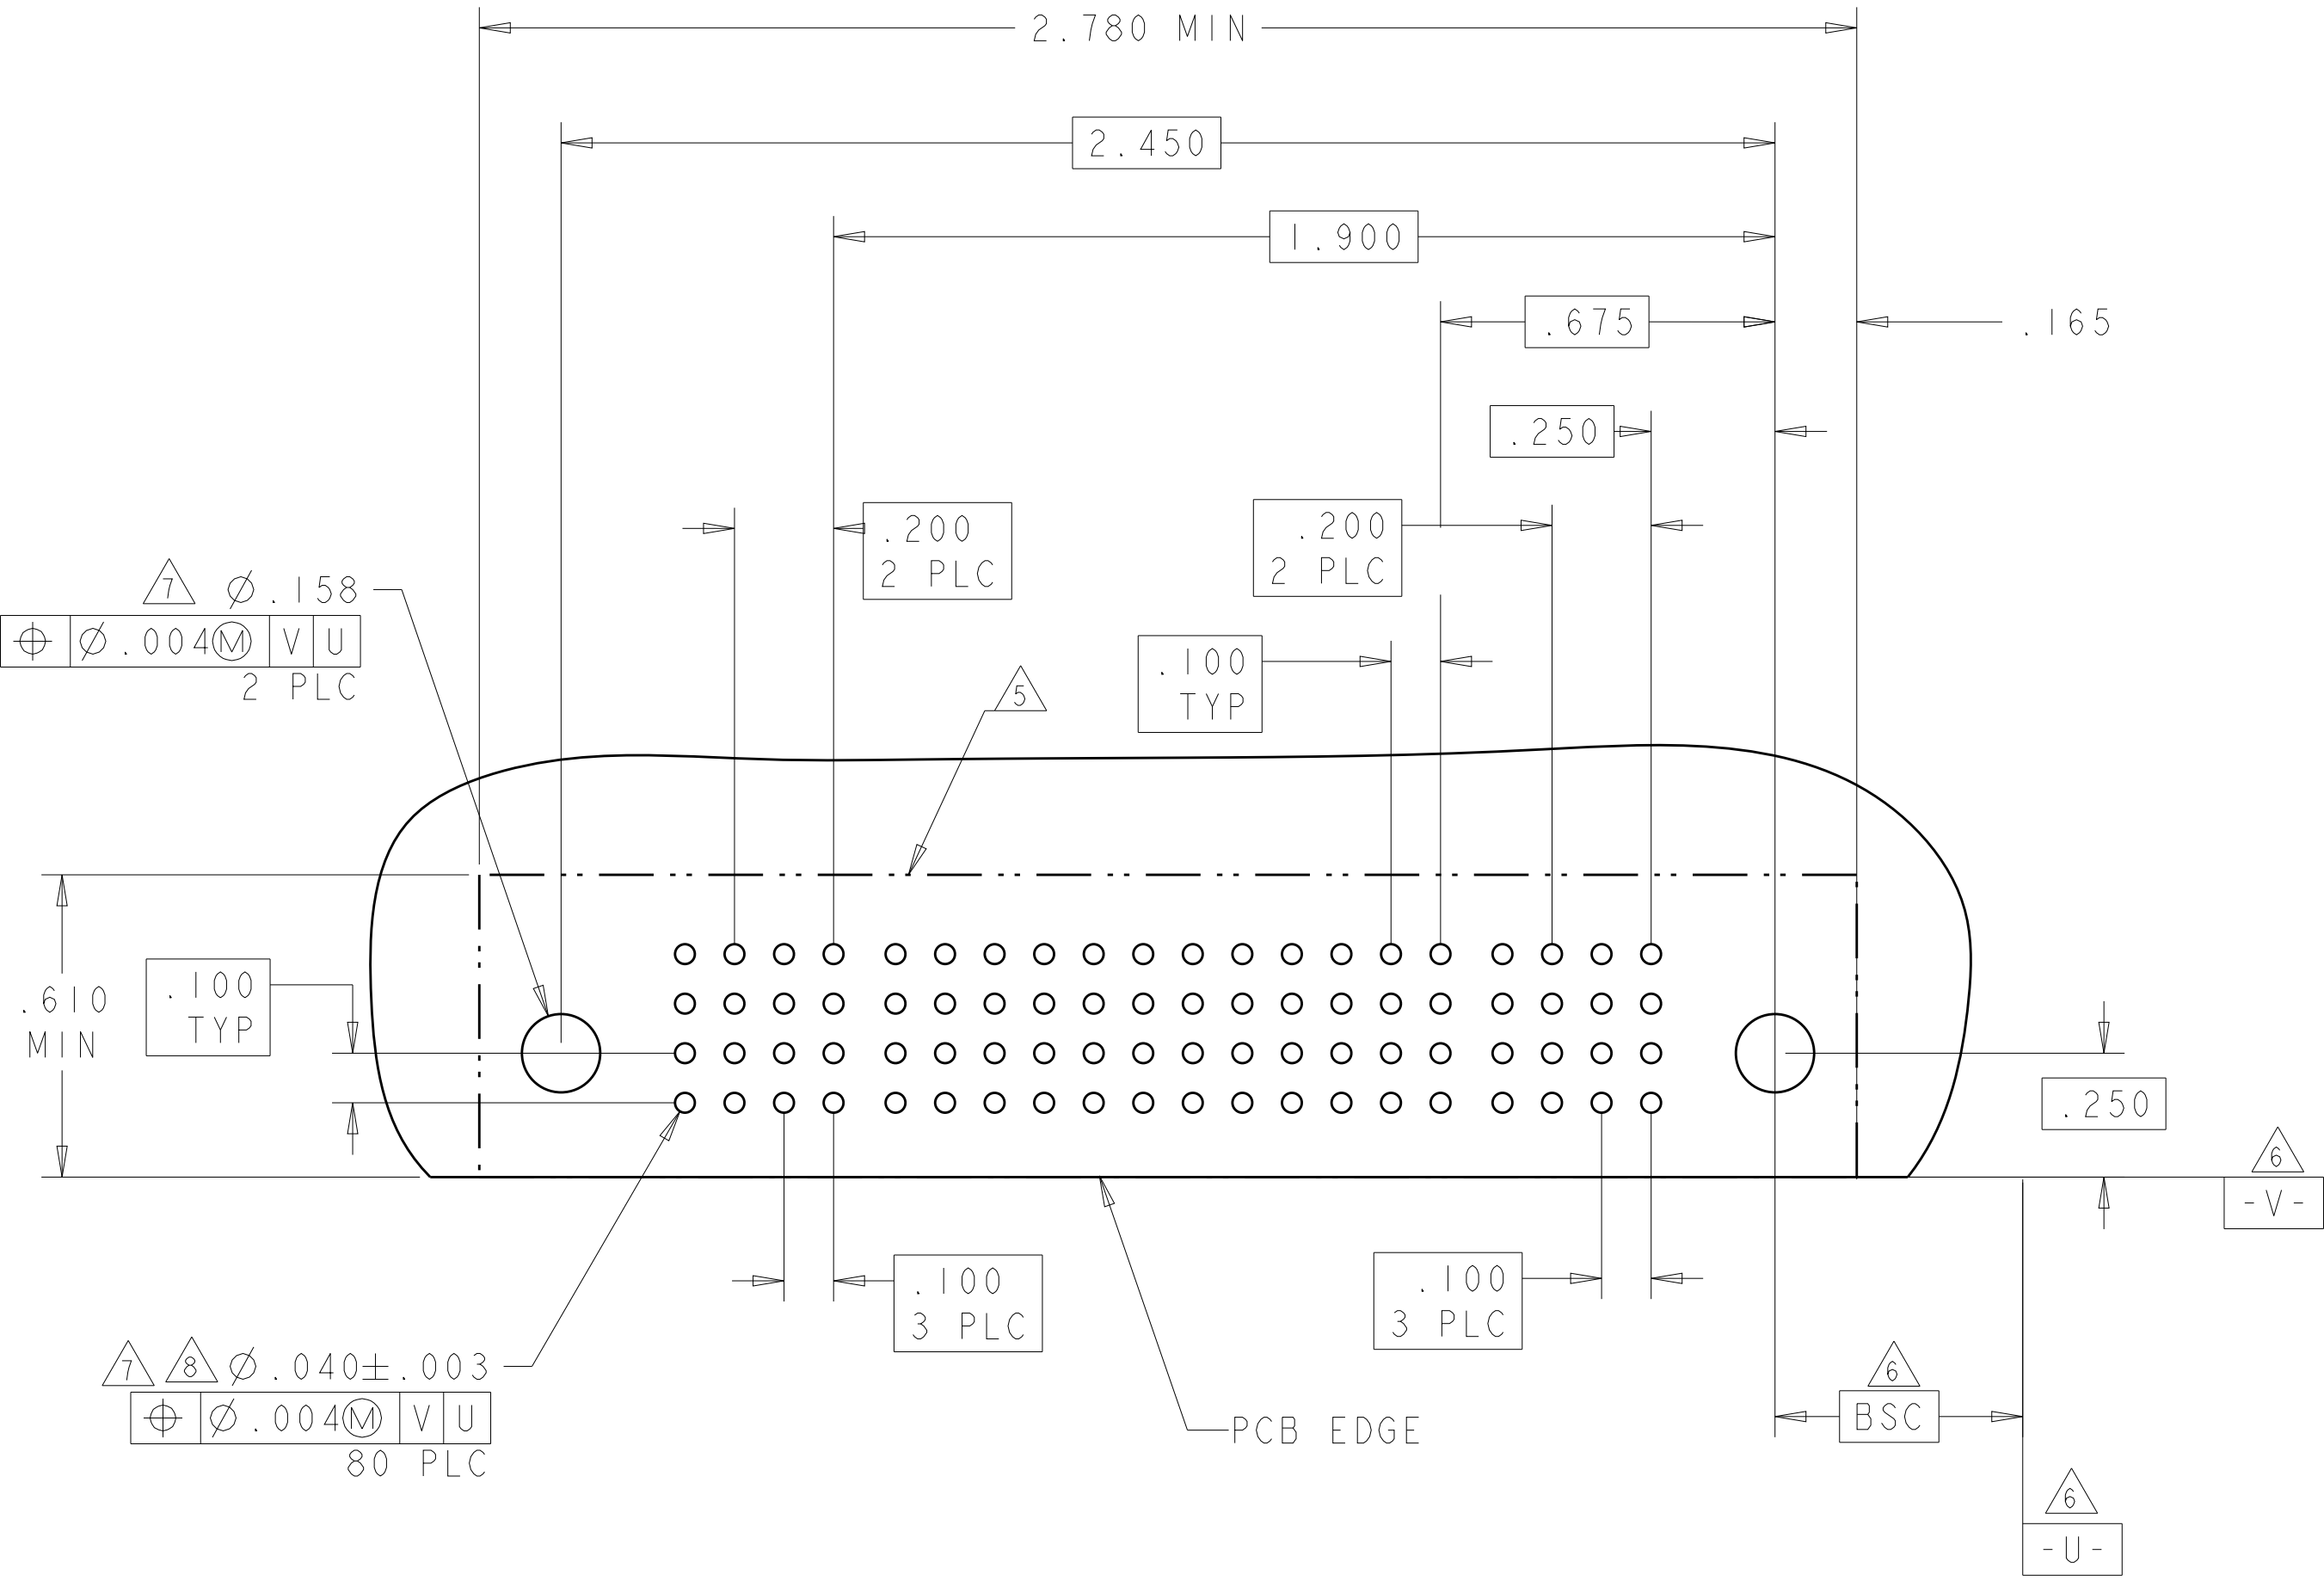

PART NUMBER	ROWS		POWER`						SIGNAL								POWER					
			P11	P10	P9	P8	P7	P6	8	7	6	5	4	3	2	1	P5	P4	P3	P2	P1	
1-6450370-4	D C B A							H	H	H	H				H	H						
								G	G	G	G			G	G							
								F	F	F	F			F	F							
								E	E	E	E			E	E							
5ACP + 32S + 6P																						

NO CONTACTS LOADED


C7

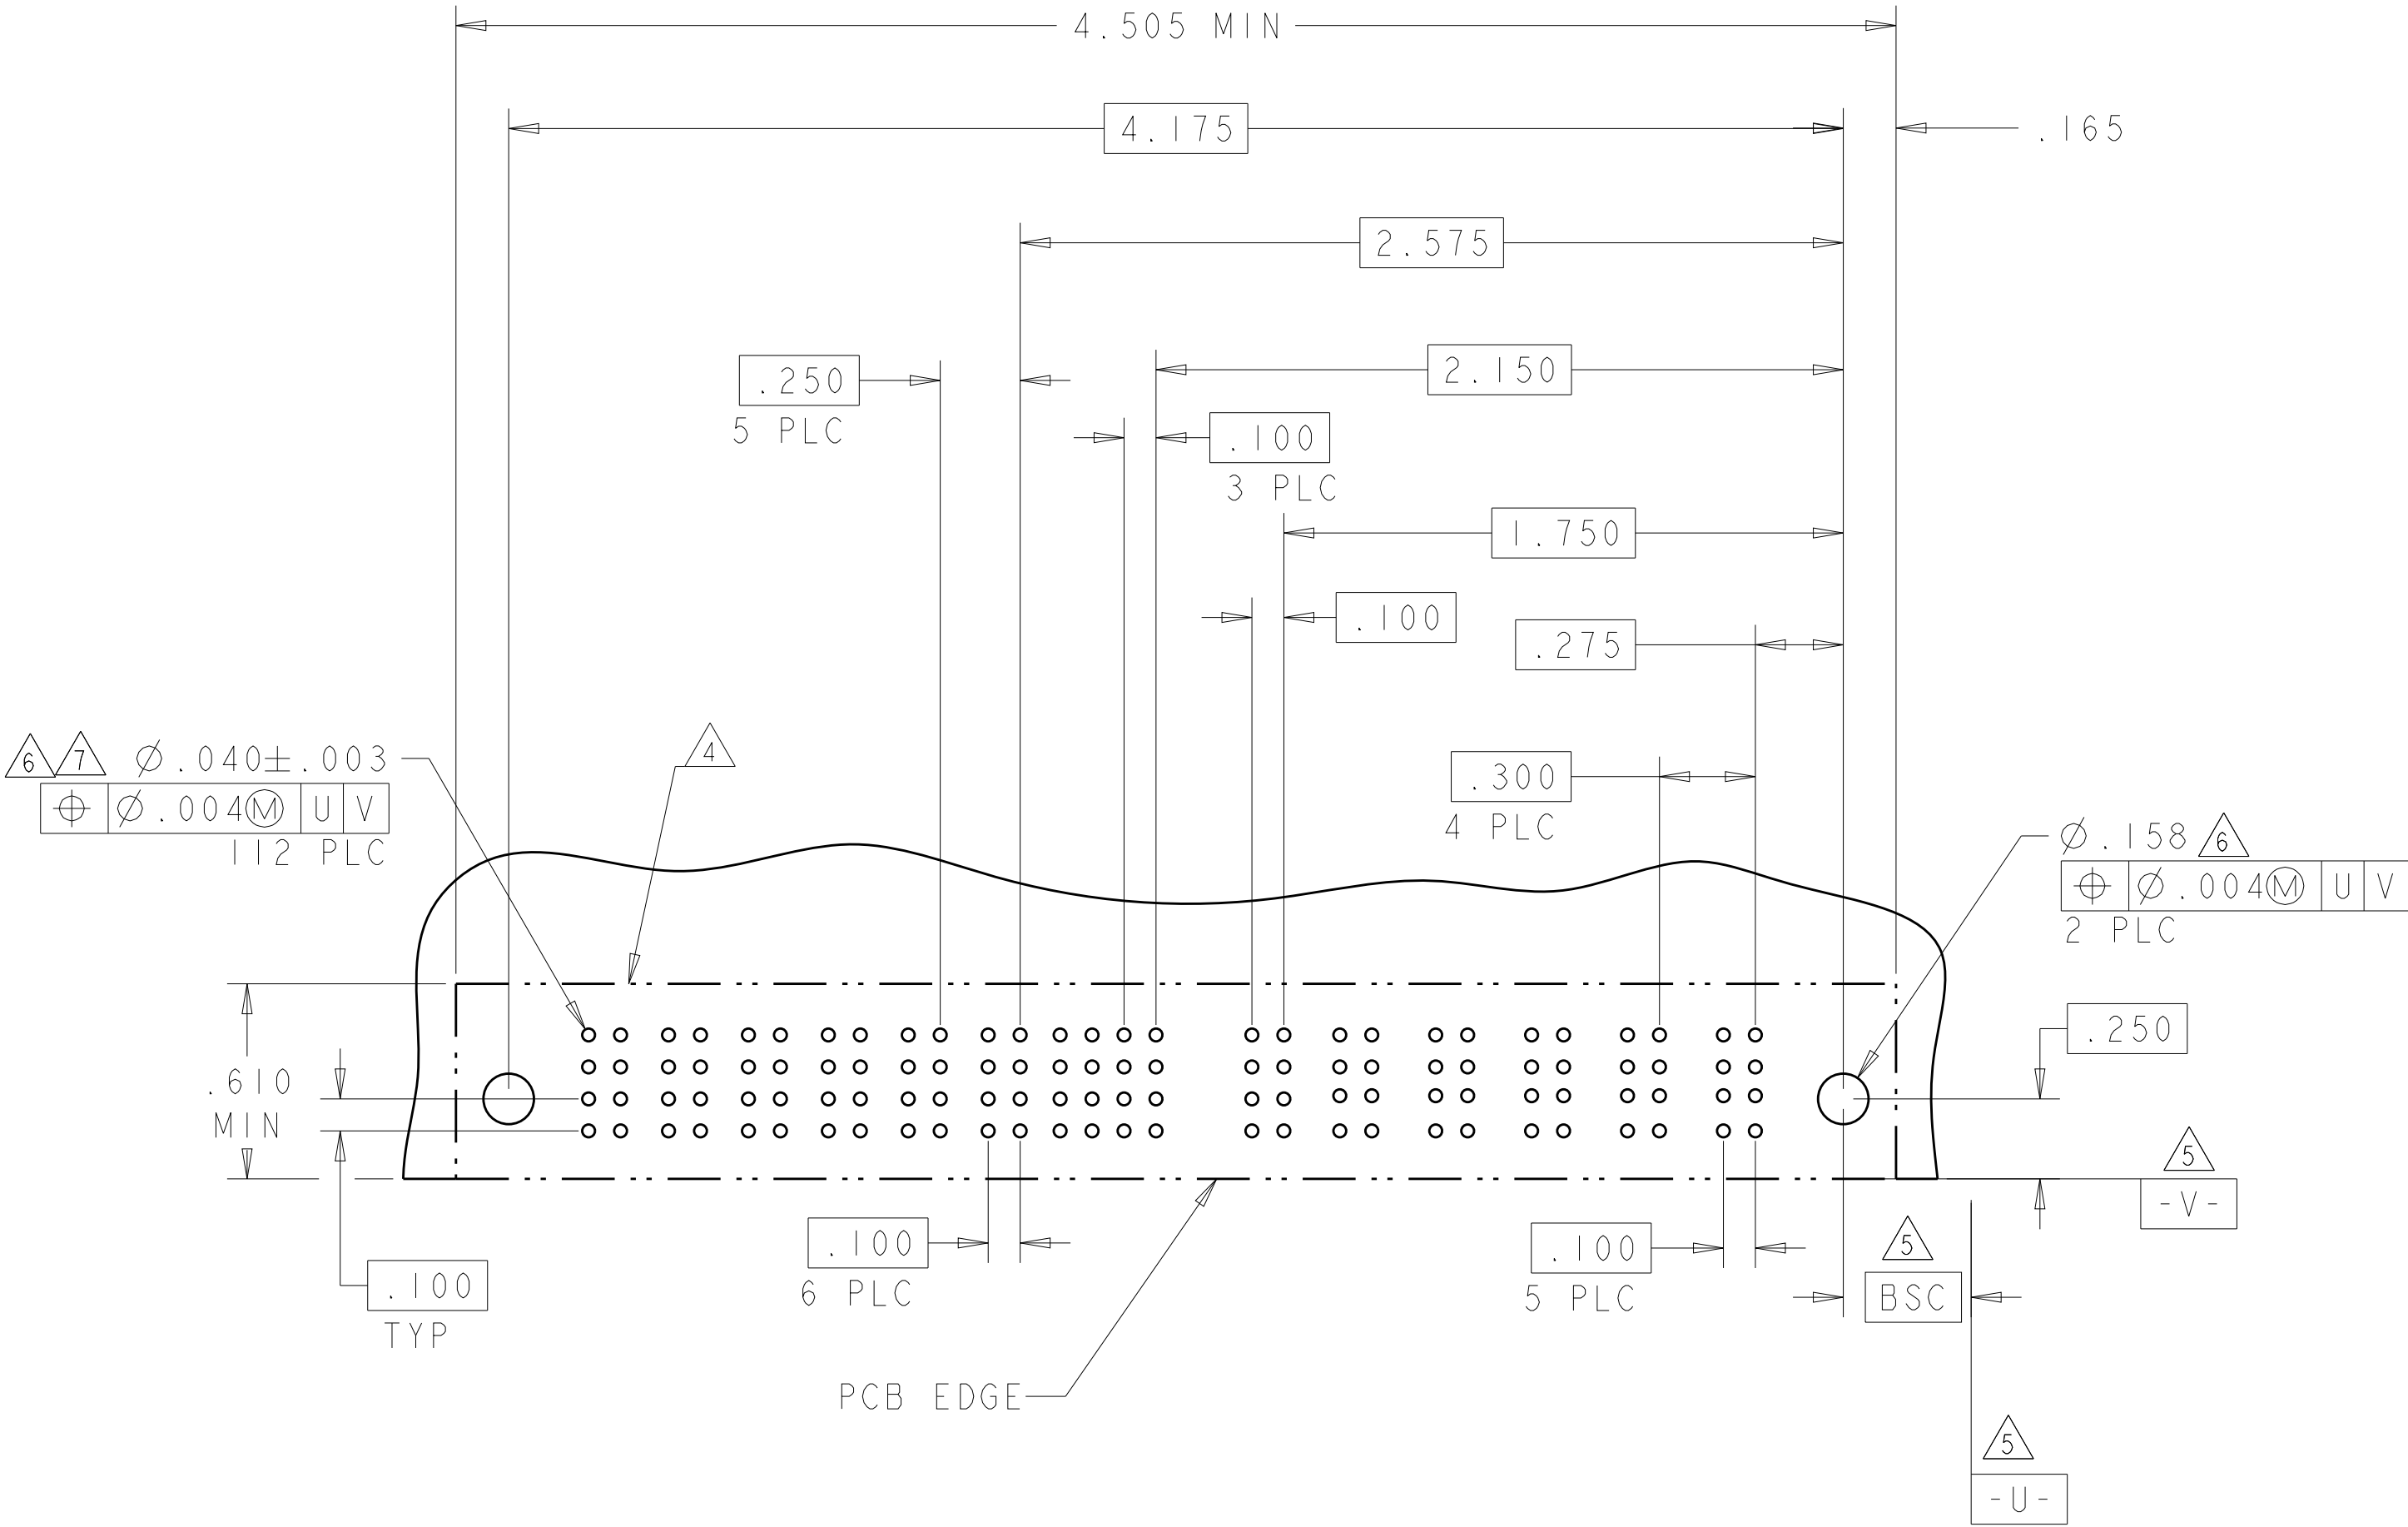

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	08APR05	TE Connectivity	
		CHK M. PERCHERKE	08APR05		
DIMENSIONS:		APVD M. PERCHERKE	-	NAME	
INCHES		PRODUCT SPEC		RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		108-1973		SIZE	
		APPLICATION SPEC		CAGE CODE	
		114-13038		DRAWING NO	
MATERIAL		WEIGHT		RESTRICTED TO	
		CUSTOMER DRAWING		A100779	
				C=6450370	
				SCALE	
				4:1	
				SHEET	
				4 OF 6	
				REV	
				C7	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00					APVD

PART NUMBER	ROWS		POWER								SIGNAL											POWER														
			P20	P19	P18	P17	P16	P15	P14	P13	I2	I1	I0	9	8	7	6	5	4	3	2	1	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3		P2	P1	
I-6450370-2	D C B A				RM	RM		RM	RM		H	H	H								H	H	H			RA			RM		RM		RM			
																						G	G	G												
													F	F	F								F	F	F											
													E	E	E								E	E	E											
12P + 48S + 8P																																				

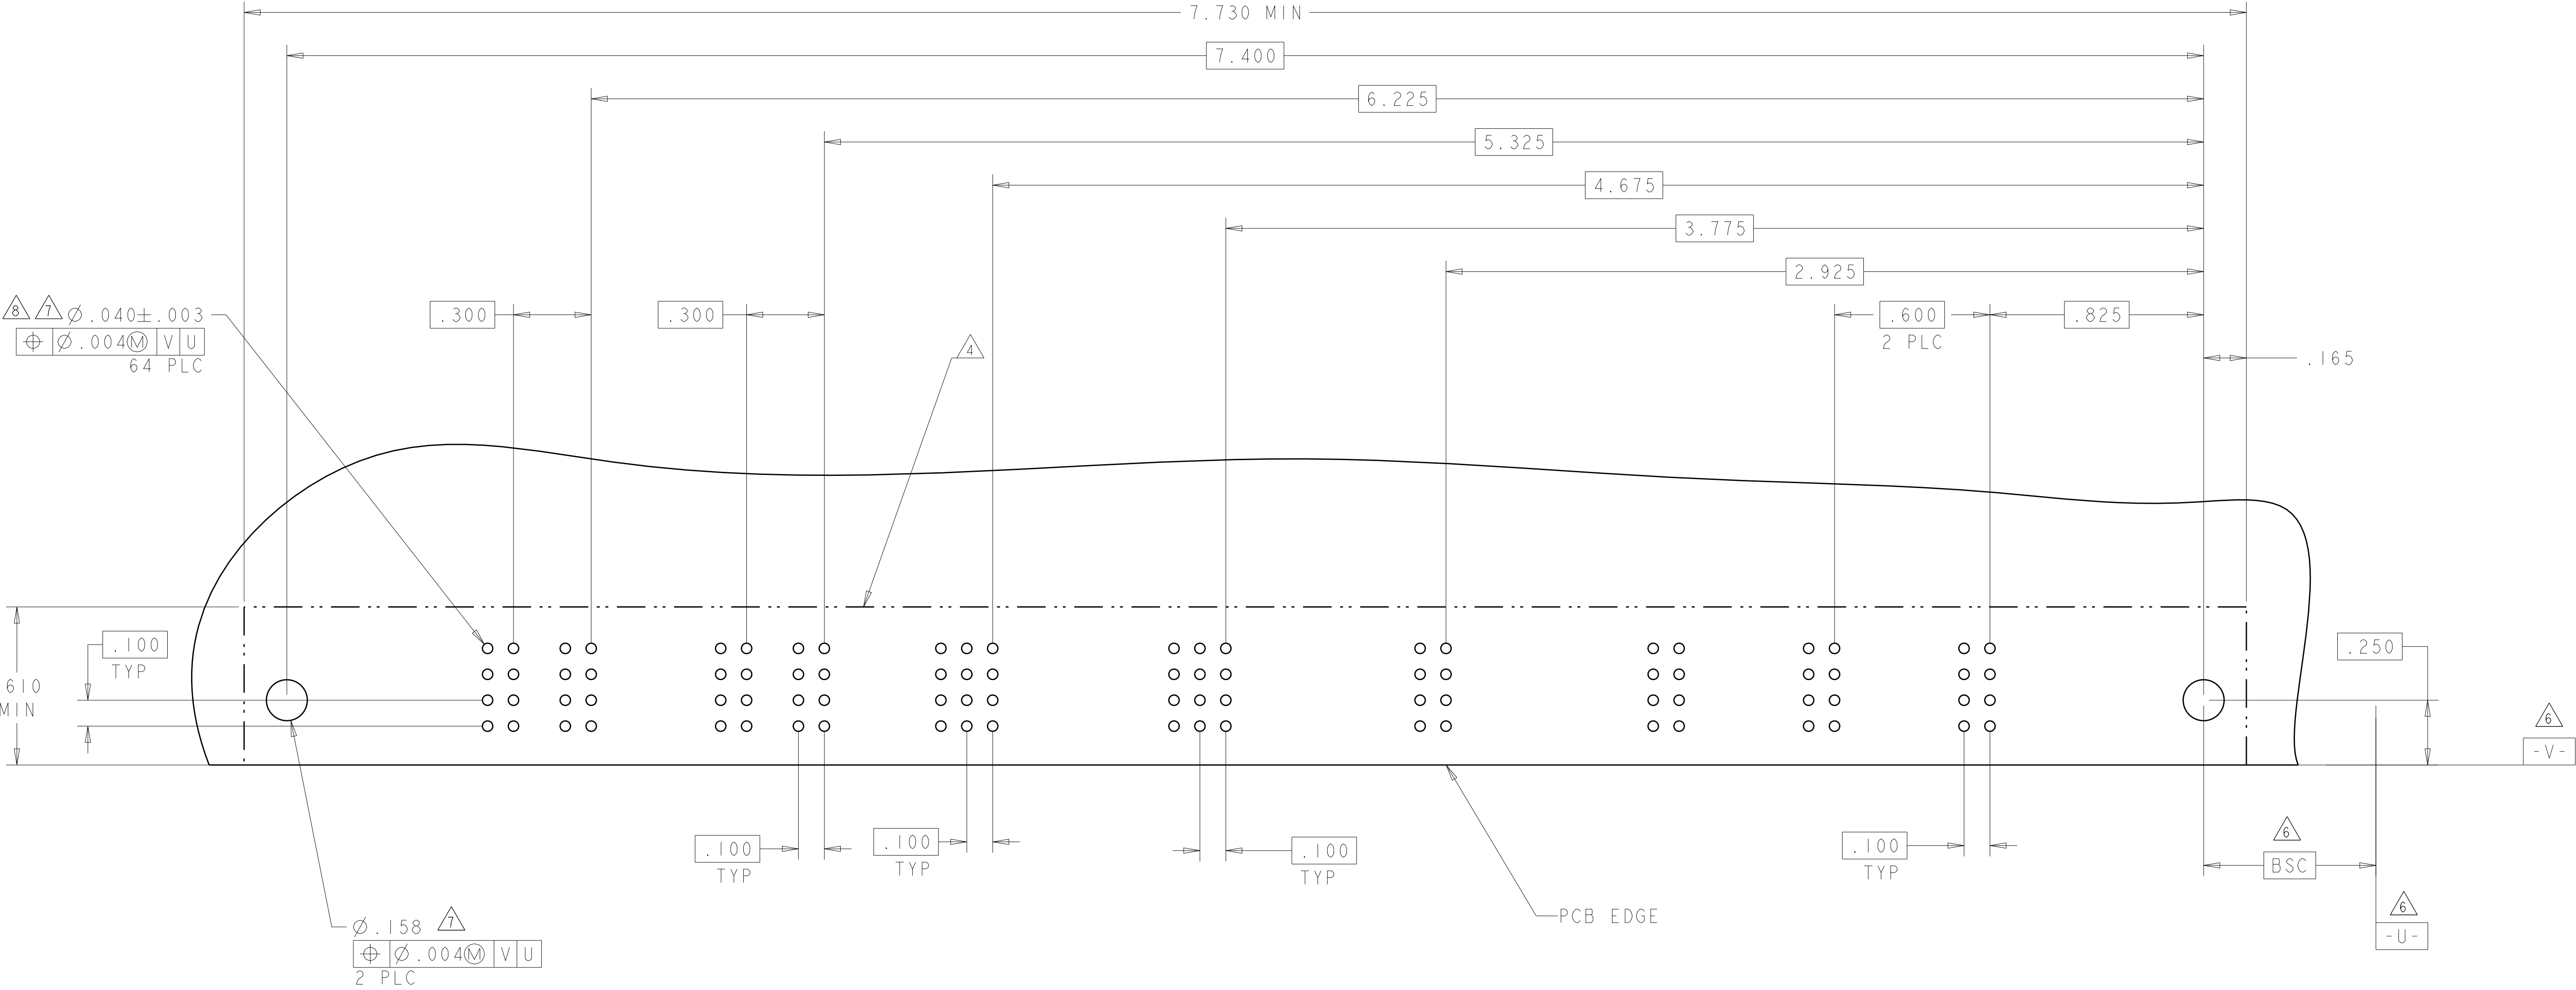

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL: -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES #2°

FINISH -

DWN: R.GRZYBOWSKI 08APR05

CHK: M.PERCHEKKE 08APR05

APVD: M.PERCHEKKE -

PRODUCT SPEC: 108-1973

APPLICATION SPEC: 114-13038

WEIGHT: -

CUSTOMER DRAWING

NAME: RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE: A1

CAGE CODE: 00779

DRAWING NO: C=6450370

RESTRICTED TO: -

SCALE: 4:1


SHEET: 5 OF 6

REV: C7

TE Connectivity

RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

C5

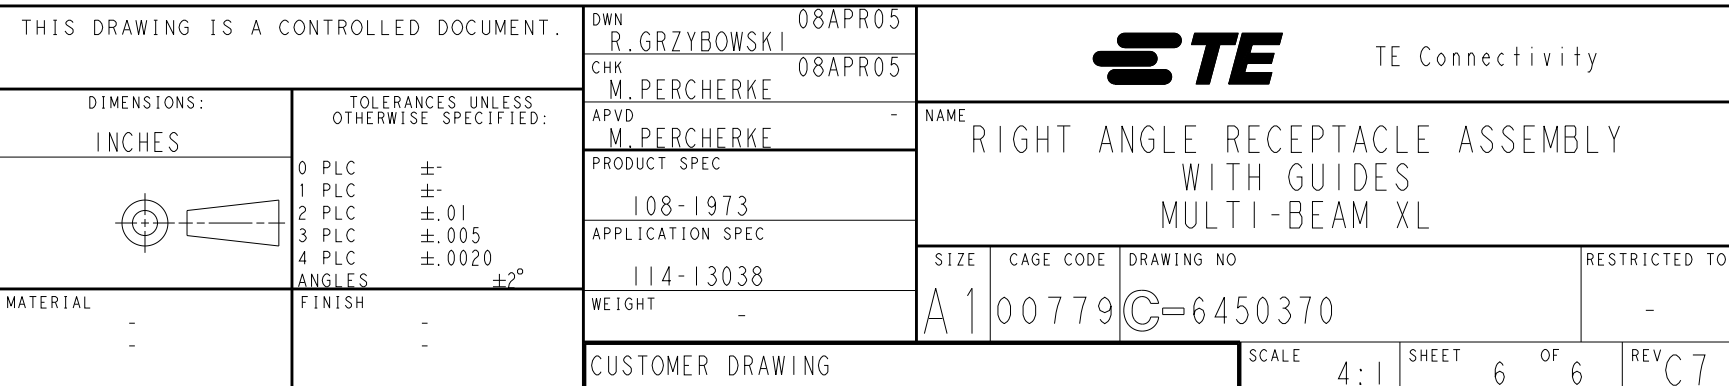

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6450370-2](#)