**Product data sheet** 

### 1. General description

The 74LV393 is a low–voltage Si-gate CMOS device and is pin and function compatible with 74HC393 and 74HCT393.

The 74LV393 is a dual 4-stage binary ripple counter. Each counter features a clock input ( $n\overline{CP}$ ), an overriding asynchronous master reset input (nMR) and 4 buffered parallel outputs (nQ0 to nQ3). The counter advances on the HIGH-to-LOW transition of  $n\overline{CP}$ . A HIGH on nMR clears the counter stages and forces the outputs LOW, independent of the state of  $n\overline{CP}$ .

### 2. Features and benefits

- Optimized for low voltage applications: 1.0 V to 3.6 V
- Accepts TTL input levels between V<sub>CC</sub> = 2.7 V and V<sub>CC</sub> = 3.6 V
- Typical V<sub>OLP</sub> (output ground bounce) 0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>amb</sub> = 25 °C
- Typical V<sub>OHV</sub> (output V<sub>OH</sub> undershoot) 2 V at V<sub>CC</sub> = 3.3 V, T<sub>amb</sub> = 25 °C
- Two 4-bit binary counters with individual clocks
- Divide-by any binary module up to 28 in one package
- Two master resets to clear each 4-bit counter individually
- Complies with JEDEC standard no. 7A
- ESD protection:
  - ♦ HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V


# 3. Ordering information


#### Table 1.Ordering information

Type number	er Package						
	Temperature range	Name	Description	Version			
74LV393D	–40 °C to +125 °C	SO14	plastic small outline package; 14 leads; body width 3.9 mm	SOT108-1			
74LV393DB	−40 °C to +125 °C	SSOP14	plastic shrink small outline package; 14 leads; body width 5.3 mm	SOT337-1			
74LV393PW	–40 °C to +125 °C	TSSOP14	plastic thin shrink small outline package; 14 leads; body width 4.4 mm	SOT402-1			

# nexperia


# 4. Functional diagram

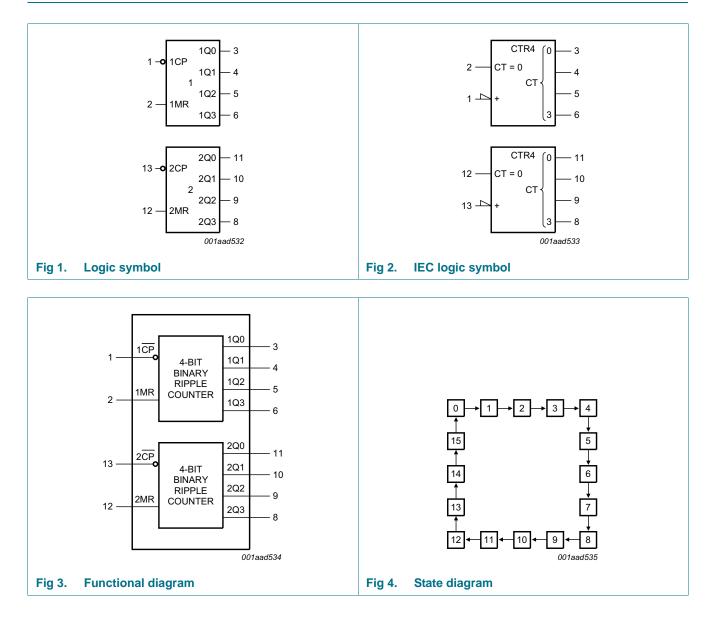

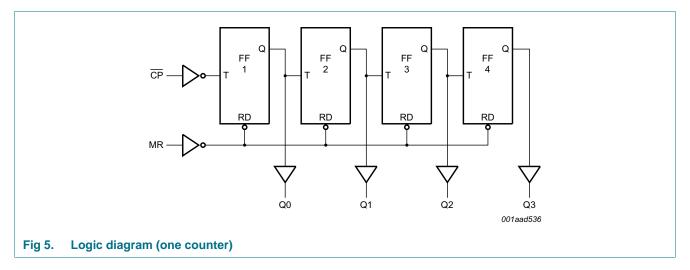

# 5. Pinning information

### 5.1 Pinning

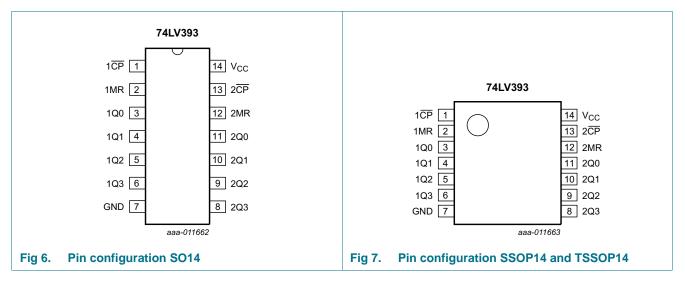

### 5.2 Pin description

Table 2. Pin description							
Symbol	Pin	Description					
1 <u>CP</u> , 2 <u>CP</u>	1, 13	clock input (HIGH-to-LOW, edge-triggered)					
1MR, 2MR	2, 12	asynchronous master reset input (active HIGH)					
1Q0, 1Q1, 1Q2, 1Q3	3, 4, 5, 6	flip-flop output					
GND	7	ground (0 V)					
2Q0, 2Q1, 2Q2, 2Q3	11, 10, 9, 8	flip-flop output					
V <sub>CC</sub>	14	supply voltage					

74LV393 Product data sheet

# 6. Functional description

Count		Output							
	nQ0	nQ1	nQ2	nQ3					
0	L	L	L	L					
1	Н	L	L	L					
2	L	Н	L	L					
3	Н	Н	L	L					
4	L	L	Н	L					
5	Н	L	Н	L					
6	L	н	н	L					
7	Н	Н	Н	L					
8	L	L	L	Н					
9	Н	L	L	Н					
10	L	н	L	Н					
11	Н	н	L	Н					
12	L	L	н	Н					
13	Н	L	н	Н					
14	L	Н	н	Н					
15	Н	Н	Н	Н					

 Table 3.
 Count sequence for one counter [1]

[1] H = HIGH voltage level; L = LOW voltage level.

# 7. Limiting values

#### Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>CC</sub>	supply voltage			-0.5	+4.6	V
I <sub>IK</sub>	input clamping current	$V_{\rm I}$ < -0.5 V or $V_{\rm I}$ > $V_{\rm CC}$ + 0.5 V		-	±20	mA
Ι <sub>ΟΚ</sub>	output clamping current	$V_{O}$ < -0.5 V or $V_{O}$ > $V_{CC}$ + 0.5 V		-	±50	mA
I <sub>O</sub>	output current	$V_{O}$ = -0.5 V to $V_{CC}$ + 0.5 V		-	±25	mA
I <sub>CC</sub>	supply current			-	+50	mA
I <sub>GND</sub>	ground current			-50	-	mA
T <sub>stg</sub>	storage temperature			-65	+150	°C
P <sub>tot</sub>	total power dissipation	$T_{amb} = -40 \text{ °C to } +125 \text{ °C}$				
		SO14 package	<u>[1]</u>	-	500	mW
		(T)SSOP14 package	[2]	-	400	mW

[1] For SO14 package:  $P_{tot}$  derates linearly with 8 mW/K above 70  $^\circ C.$ 

[2] For (T)SSOP14 packages:  $P_{tot}$  derates linearly with 5.5 mW/K above 60 °C.

# 8. Recommended operating conditions

### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V <sub>CC</sub>	supply voltage		1.0	3.3	3.6	V
VI	input voltage		0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	-	+125	°C
$\Delta t / \Delta V$	input transition rise and fall rate	$V_{CC}$ = 1.0 V to 2.0 V	-	-	500	ns/V
		$V_{CC}$ = 2.0 V to 2.7 V	-	-	200	ns/V
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	-	-	100	ns/V

### 9. Static characteristics

#### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	-40	°C to +8	S ℃	–40 °C to	+125 °C	Unit
			Min	Typ[1]	Max	Min	Max	
V <sub>IH</sub>	HIGH-level input voltage	V <sub>CC</sub> = 1.2 V	0.9	-	-	0.9	-	V
		V <sub>CC</sub> = 2.0 V	1.4	-	-	1.4	-	V
		V <sub>CC</sub> = 2.7 V to 3.6 V	2.0	-	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage	V <sub>CC</sub> = 1.2 V	-	-	0.3	-	0.3	V
		V <sub>CC</sub> = 2.0 V	-	-	0.6	-	0.6	V
		V <sub>CC</sub> = 2.7 V to 3.6 V	-	-	0.8	-	0.8	V
V <sub>ОН</sub>	HIGH-level output voltage	$V_{I} = V_{IH} \text{ or } V_{IL}$						
		$I_0 = -100 \ \mu A; \ V_{CC} = 1.2 \ V$	-	1.2	-	-	-	V
		$I_0 = -100 \ \mu A; \ V_{CC} = 2.0 \ V$	1.8	2.0	-	1.8	-	V
		$I_0 = -100 \ \mu A; \ V_{CC} = 2.7 \ V$	2.5	2.7	-	2.5	-	V
		$I_0 = -100 \ \mu A; \ V_{CC} = 3.0 \ V$	2.80	3.0	-	2.8	-	V
		$I_{O} = -6 \text{ mA}; V_{CC} = 3.0 \text{ V}$	2.40	2.82	-	2.20	-	V
V <sub>OL</sub>	LOW-level output voltage	$V_{I} = V_{IH} \text{ or } V_{IL}$						
		$I_0 = 100 \ \mu\text{A}; \ V_{CC} = 1.2 \ \text{V}$	-	0	-	-	-	V
		$I_0 = 100 \ \mu\text{A}; \ V_{CC} = 2.0 \ \text{V}$	-	0	0.2	-	0.2	V
		$I_0 = 100 \ \mu\text{A}; \ V_{CC} = 2.7 \ \text{V}$	-	0	0.2	-	0.2	V
		$I_0 = 100 \ \mu\text{A}; \ V_{CC} = 3.0 \ \text{V}$	-	0	0.2	-	0.2	V
		$I_0 = 6 \text{ mA}; V_{CC} = 3.0 \text{ V}$	-	0.25	0.40	-	0.50	V
l <sub>l</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 3.6$ V	-	-	1.0	-	1.0	μΑ
I <sub>CC</sub>	supply current		-	-	20.0	-	160	μA
Δl <sub>CC</sub>	additional quiescent supply current per input		-	-	500	-	850	μA
CI	input capacitance		-	3.5	-	-	-	pF

[1] All typical values are measured at  $T_{amb} = 25 \ ^{\circ}C$ .

# **10. Dynamic characteristics**

#### Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V);  $C_L = 50 \text{ pF}$  unless otherwise specified; for test circuit, see <u>Figure 10</u>.

Symbol	Parameter	Conditions		-40	°C to +8	5 °C	–40 °C t	o +125 °C	Unit
				Min	Typ <mark>[1]</mark>	Max	Min	Max	
t <sub>pd</sub>	propagation delay	nCP to nQ0; see Figure 8	[3]		_		1		
		V <sub>CC</sub> = 1.2 V		-	75	-	-	-	ns
		$V_{CC} = 2.0 V$		-	26	49	-	60	ns
		$V_{CC} = 2.7 V$		-	19	36	-	44	ns
		$V_{CC} = 3.3 \text{ V}, \text{ C}_{L} = 15 \text{ pF}$		-	12	-	-	-	ns
		$V_{CC} = 3.0 \text{ V} \text{ to } 3.6 \text{ V}$		-	14	29	-	35	ns
		nQ to nQn+1; see Figure 8	<u>[3]</u>			1	1		
		V <sub>CC</sub> = 1.2 V		-	25	-	-	-	ns
		$V_{CC} = 2.0 V$		-	9	17	-	20	ns
		$V_{CC} = 2.7 V$		-	6	13	-	15	ns
		$V_{CC} = 3.3 \text{ V}, \text{ C}_{L} = 15 \text{ pF}$		-	4	-	-	-	ns
		$V_{CC} = 3.0 \text{ V} \text{ to } 3.6 \text{ V}$	[2]	-	5	10	-	12	ns
t <sub>PHL</sub>	HIGH to LOW	nMR to nQx; see Figure 9				1	1		
	propagation delay	V <sub>CC</sub> = 1.2 V		-	70	-	-	-	ns
		$V_{CC} = 2.0 V$		-	24	44	-	54	ns
		$V_{CC} = 2.7 V$		-	18	33	-	40	ns
		V <sub>CC</sub> = 3.3 V, C <sub>L</sub> = 15 pF		-	11	-	-	-	ns
		$V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$	[2]	-	13	26	-	32	ns
t <sub>t</sub>	transition time	nQx; see <u>Figure 8</u>	<u>[4]</u>			1	1		
		$V_{CC} = 2.0 V$		-	-	-	-	-	ns
		$V_{CC} = 2.7 V$		-	-	-	-	-	ns
		$V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$		-	-	-	-	-	ns
tw	pulse width	nCP HIGH or LOW; see Figure 8					1	1	
		$V_{CC} = 2.0 V$		34	10	-	41	-	ns
		$V_{CC} = 2.7 V$		25	8	-	30	-	ns
		$V_{CC} = 3.0 \text{ V} \text{ to } 3.6 \text{ V}$	[2]	20	6	-	24	-	ns
		nMR HIGH; see <u>Figure 9</u>				1	1		
		V <sub>CC</sub> = 2.0 V		34	12	-	41	-	ns
		$V_{CC} = 2.7 V$		25	9	-	30	-	ns
		$V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$	[2]	20	7	-	24	-	ns
rec	recovery time	nMR to nCP; see Figure 9					1	1	
		V <sub>CC</sub> = 1.2 V		-	5	-	-	-	ns
		$V_{CC} = 2.0 V$		5	2	-	5	-	ns
		V <sub>CC</sub> = 2.7 V		5	2	-	5	-	ns
		$V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$	[2]	5	1	-	5	-	ns

# 74LV393

### Dual 4-bit binary ripple counter

### Table 7. Dynamic characteristics ...continued

Voltages are referenced to GND (ground = 0 V);  $C_L = 50 \text{ pF}$  unless otherwise specified; for test circuit, see Figure 10.

Symbol Parameter		ol Parameter Conditions		–40 °C to +85 °C		-40 °C to	Unit	
			Min	Typ[1]	Max	Min	Max	
f <sub>max</sub>	maximum	see Figure 8		·				
frequency	V <sub>CC</sub> = 2.0 V	14	53	-	12	-	MHz	
		$V_{CC} = 2.7 V$	19	72	-	16	-	MHz
		$V_{CC} = 3.3 \text{ V}, \text{ C}_{L} = 15 \text{ pF}$	-	99	-	-	-	MHz
		$V_{\rm CC} = 3.0 \text{ V to } 3.6 \text{ V}$	24	90	-	20	-	MHz
C <sub>PD</sub>	power dissipation capacitance	$V_{I} = GND \text{ to } V_{CC}$		23	-	-	-	pF

[1] All typical values are measured at  $T_{amb}$  = 25  $^\circ C.$ 

[2] Typical values are measured at V<sub>CC</sub> = 3.3 V.

 $[3] \quad t_{pd} \text{ is the same as } t_{PLH} \text{ and } t_{PHL}.$ 

[4]  $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ .

[5]  $C_{PD}$  is used to determine the dynamic power dissipation (P<sub>D</sub> in  $\mu$ W).

 $P_{D} = C_{PD} \times V_{CC}^{2} \times f_{i} \times N + \sum (C_{L} \times V_{CC}^{2} \times f_{o}) \text{ where:}$ 

 $f_i$  = input frequency in MHz;

 $f_o$  = output frequency in MHz;


 $C_L = output \ \text{load capacitance in } pF;$ 

 $V_{CC}$  = supply voltage in V;

N = number of inputs switching;


 $\Sigma(C_L \times V_{CC}{}^2 \times f_o)$  = sum of outputs.

### 10.1 Waveforms

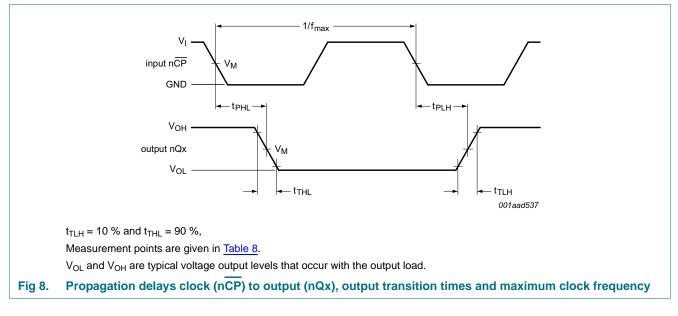

#### Table 8.Measurement points

Supply voltage V <sub>CC</sub>	Input	Output				
	V <sub>M</sub>	V <sub>M</sub>	V <sub>X</sub>	V <sub>Y</sub>		
< 2.7 V	0.5V <sub>CC</sub>	0.5V <sub>CC</sub>	V <sub>OL</sub> + 0.1V <sub>CC</sub>	$V_{OH} - 0.1 V_{CC}$		
2.7 V to 3.6 V	1.5V <sub>CC</sub>	1.5V <sub>CC</sub>	V <sub>OL</sub> + 0.3V <sub>CC</sub>	$V_{OH} - 0.3V_{CC}$		

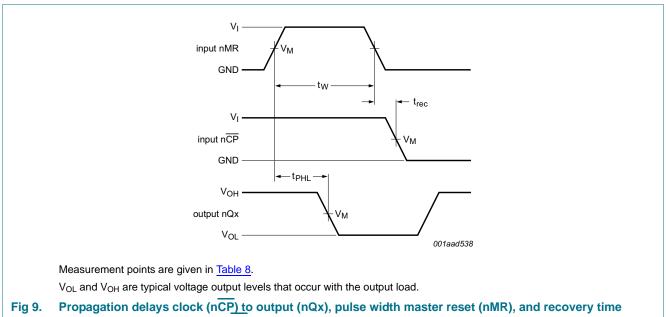


master reset (nMR) to clock (nCP)

### Nexperia

# 74LV393


### **Dual 4-bit binary ripple counter**

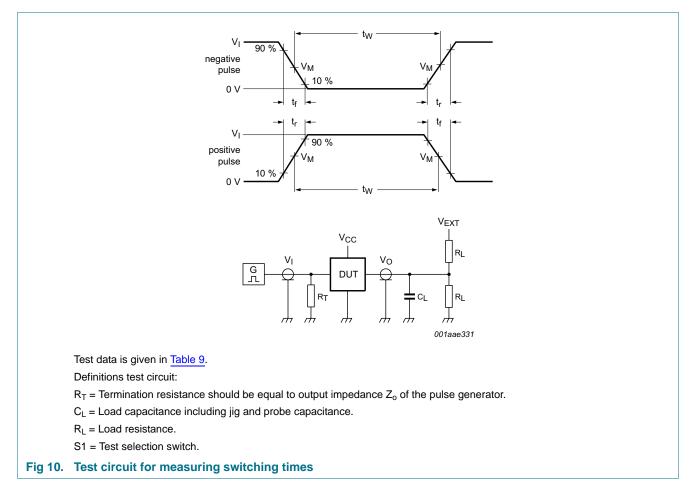

### Table 9. Test data

Supply voltage	Input		Load	V <sub>EXT</sub>	
V <sub>cc</sub>	VI	t <sub>r</sub> , t <sub>f</sub>	CL	RL	t <sub>PHL</sub> , t <sub>PLH</sub>
< 2.7 V	V <sub>CC</sub>	≤ 2.5 ns	50 pF	1 kΩ	open
2.7 V to 3.6 V	2.7 V	≤ 2.5 ns	15 pF, 50 pF	1 kΩ	open

# 11. Package outline

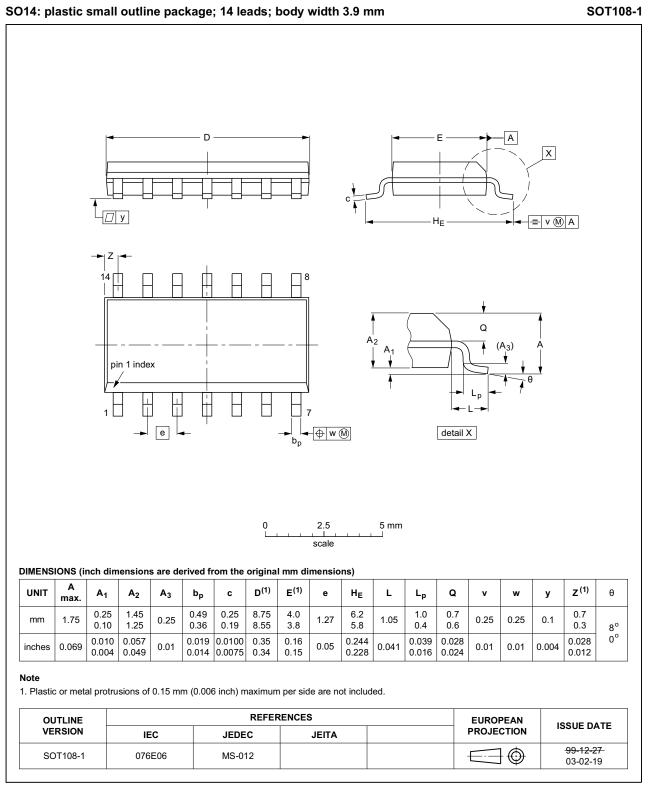

### Fig 11. Package outline SOT108-1 (SO14)

All information provided in this document is subject to legal disclaimers.

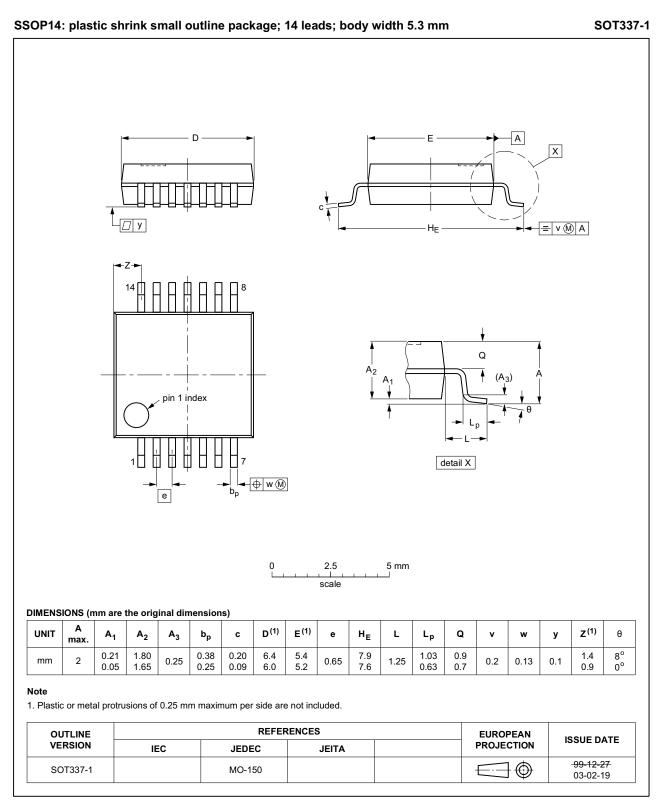


Fig 12. Package outline SOT337-1 (SSOP14)

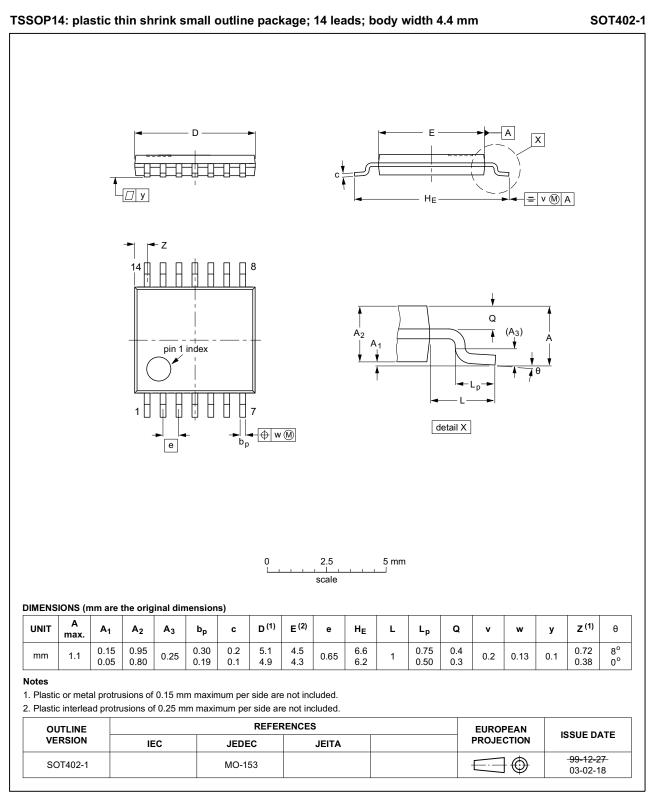


Fig 13. Package outline SOT402-1 (TSSOP14)

All information provided in this document is subject to legal disclaimers.

# **12. Abbreviations**

Table 10. Abbreviations						
Acronym	Description					
CDM	Charged Device Model					
DUT	Device Under Test					
ESD	ElectroStatic Discharge					
HBM	Human Body Model					
MIL	Military					
ММ	Machine Model					

# 13. Revision history

### Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74LV393 v.5	20151208	Product data sheet	-	74LV393 v.4
Modifications:	Type number	er 74LV393N (SOT27-1) rem	noved.	
74LV393 v.4	20140918	Product data sheet	-	74LV393 v.3
Modifications:	• <u>Table 4</u> minu	us sign added to the minimu	Im ground current.	L
	<ul> <li>Figure 10 ar</li> </ul>	nd <u>Table 9</u> updated because	of a missing load resis	tance in the test circuit.
74LV393 v.3	20140428	Product data sheet	-	74LV393 v.2
Modifications:		of this data sheet has been i f NXP Semiconductors.	redesigned to comply w	vith the new identity
	<ul> <li>Legal texts I</li> </ul>	have been adapted to the ne	ew company name whe	re appropriate.
74LV393 v.2	19970610	Product specification	-	74LV393 v.1
74LV393 v.1	19970304	Product specification	-	-

# 14. Legal information

### 14.1 Data sheet status

Document status[1][2]	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <a href="http://www.nexperia.com">http://www.nexperia.com</a>.

### 14.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any

representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and

customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 14.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale - Nexperia

products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

### Nexperia

# 74LV393

#### Dual 4-bit binary ripple counter

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of

non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the

product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### 14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

# **15. Contact information**

For more information, please visit: http://www.nexperia.com

For sales office addresses, please send an email to: salesaddresses@nexperia.com

# 74LV393

### Dual 4-bit binary ripple counter

# **16. Contents**

1	General description 1
2	Features and benefits 1
3	Ordering information 1
4	Functional diagram 2
5	Pinning information 3
5.1	Pinning 3
5.2	Pin description 3
6	Functional description 4
7	Limiting values 4
8	Recommended operating conditions 5
9	Static characteristics 5
10	Dynamic characteristics 6
10.1	Waveforms 8
11	Package outline 10
12	Abbreviations 13
13	Revision history 13
14	Legal information 14
14.1	Data sheet status 14
14.2	Definitions 14
14.3	Disclaimers 14
14.4	Trademarks 15
15	Contact information 15
16	Contents 16

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nexperia:

 74LV393DB
 74LV393N
 74LV393PW
 74LV393D
 74LV393D,112
 74LV393DB,112
 74LV393DB,112
 74LV393DB,118
 74LV393D,118

 74LV393N,112
 74LV393PW,112
 74LV393PW,118
 74LV393D-Q100J
 74LV393PW-Q100J