



RSM-117-02-L-D



RSM-109-02-L-D



(1.27 mm) .050"

RSM SERIES

SMT MICRO SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?RSM



Insulator Material:
Black Liquid Crystal Polymer
Contact Material:
Phosphor Bronze

Plating:
Au or Sn over
50 μ" (1.27 μm) Ni
Current Rating (RSM/FTR):
3.1 A per pin
(2 pins powered)
Operating Temp Range:
-55 °C to +125 °C

Lead Size Accepted:
(0.46 mm) .018" SQ
Insertion Depth:
Top Entry = (2.64 mm) .104"
to (5.84 mm) .230" with
(0.38 mm) .015" wipe, or
pass-through.
Bottom Entry = (5.49 mm)
.216" minimum
(Add board thickness for
correct post OAL)
RoHS Compliant:
Yes

Mates with:
FTR, HTMS, HDWM,
DWM, TML, ZML, TMS

Optional
pick & place
pad

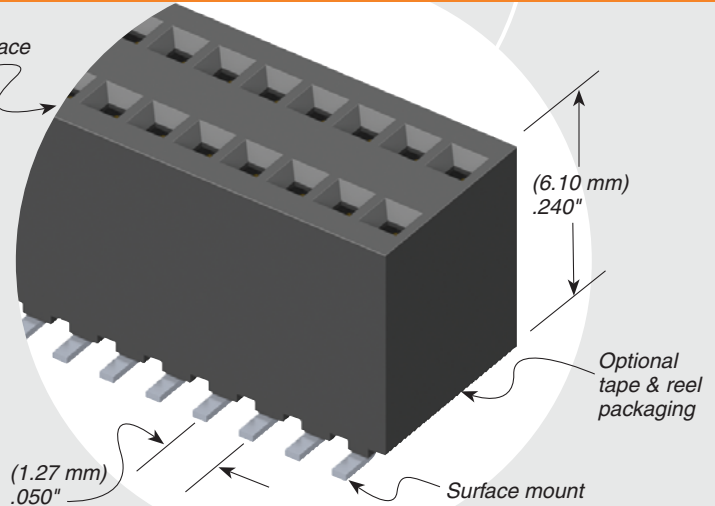

PROCESSING

Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0.10 mm) .004" max






RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




ALSO AVAILABLE (MOQ Required)

- Other platings
- Locking clips

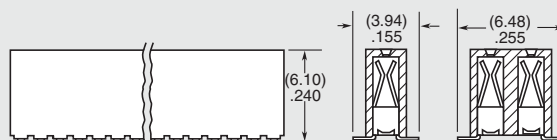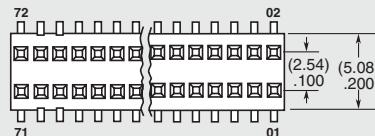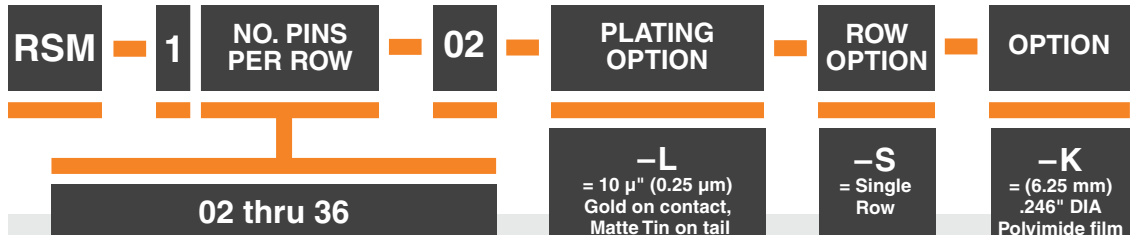

-S option
Pick & Place Pad



-D option
Pick & Place Pad

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[RSM-120-02-L-D](#) [RSM-125-02-S-D-P](#) [RSM-118-02-S-S](#) [RSM-130-02-S-D](#) [RSM-107-02-S-S](#) [RSM-106-02-L-D-K](#)
[RSM-122-02-L-S](#) [RSM-112-02-L-D-P](#) [RSM-113-02-S-D-P](#) [RSM-110-02-S-S](#) [RSM-108-02-S-D](#) [RSM-103-02-L-D](#)
[RSM-106-02-L-S](#) [RSM-110-02-F-D-K](#) [RSM-103-02-F-S](#) [RSM-112-02-S-S](#) [RSM-126-02-L-S](#) [RSM-109-02-S-S](#) [RSM-](#)
[110-02-L-D-TR](#) [RSM-115-02-S-D-P](#) [RSM-120-02-S-D](#) [RSM-119-02-S-D](#) [RSM-115-02-L-S](#) [RSM-107-02-L-D](#) [RSM-](#)
[115-02-S-S-K](#) [RSM-116-02-F-S](#) [RSM-109-02-T-S](#) [RSM-115-02-L-D](#) [RSM-125-02-S-D](#) [RSM-110-02-L-S](#) [RSM-110-](#)
[02-S-D-P](#) [RSM-108-02-L-D-P](#) [RSM-105-02-L-D](#) [RSM-130-02-F-S](#) [RSM-104-02-S-D](#) [RSM-132-02-L-D](#) [RSM-130-02-](#)
[L-D](#) [RSM-114-02-L-D](#) [RSM-102-02-S-S](#) [RSM-105-02-S-D-K](#) [RSM-108-02-S-D-K](#) [RSM-106-02-S-S](#) [RSM-120-02-L-D-](#)
[P](#) [RSM-125-02-T-D-K](#) [RSM-108-02-T-S](#) [RSM-125-02-S-D-K](#) [RSM-119-02-L-D](#) [RSM-108-02-L-S](#) [RSM-110-02-L-D-K](#)
[RSM-106-02-T-S](#) [RSM-107-02-L-S](#) [RSM-108-02-L-D-K-TR](#) [RSM-127-02-S-D-K](#) [RSM-132-02-L-S](#) [RSM-104-02-L-S](#)
[RSM-120-02-L-S](#) [RSM-114-02-S-D-K](#) [RSM-117-02-S-D-P](#) [RSM-103-02-S-D](#) [RSM-134-02-S-D](#) [RSM-106-02-S-D-K](#)
[RSM-110-02-L-D](#) [RSM-121-02-L-D](#) [RSM-109-02-T-S-P](#) [RSM-105-02-L-S](#) [RSM-102-02-L-D](#) [RSM-115-02-S-D](#) [RSM-](#)
[111-02-L-D-K](#) [RSM-116-02-S-D](#) [RSM-135-02-S-D](#) [RSM-118-02-S-D](#) [RSM-127-02-L-D](#) [RSM-115-02-S-D-K](#) [RSM-](#)
[136-02-S-D-P](#) [RSM-110-02-S-D](#) [RSM-112-02-L-D](#) [RSM-104-02-T-S](#) [RSM-112-02-L-S-K](#) [RSM-115-02-T-S](#) [RSM-102-](#)
[02-L-S](#) [RSM-116-02-L-D](#) [RSM-111-02-L-D](#) [RSM-135-02-F-D](#) [RSM-105-02-S-D](#) [RSM-108-02-L-D](#) [RSM-107-02-S-D](#)
[RSM-108-02-S-S-P](#) [RSM-116-02-L-S](#) [RSM-120-02-T-D-P](#) [RSM-103-02-L-S](#) [RSM-107-02-T-S](#) [RSM-114-02-L-S-P](#)
[RSM-106-02-L-D-P](#) [RSM-112-02-S-D](#) [RSM-120-02-L-D-K](#) [RSM-133-02-S-D-P](#) [RSM-130-02-S-D-P](#) [RSM-105-02-L-D-](#)
[K](#) [RSM-106-02-L-S-P](#) [RSM-116-02-L-D-K](#)