



#### ■ Features :

- Universal AC input / Full range
- · Adjustable output voltage and current level
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- · Built-in constant current limiting circuit
- Fully isolated plastic case with terminal block style of I/O
- Built-in active PFC function, comply with EN61000-3-2 class C (Pin≥25W)
- Class II power unit, no FG
- · Class 2 power unit
- · 100% full load burn-in test
- High reliability
- Suitable for LED lighting and moving sign applications (Note.2)
- · Compliance to worldwide safety regulations for lighting
- 2 years warranty

SPECIFICATION			TIO W SELV P AR (tor 48V only) SELV P AR (tor 48V only) (except tor 48V) F CBC							
	MODEL		PLC-30-9	PLC-30-12	PLC-30-15	PLC-30-20	PLC-30-24	PLC-30-27	PLC-30-36	PLC-30-48
		DC VOLTAGE	9V	12V	15V	20V	24V	27V	36V	48V
		CONSTANT CURRENT REGION Note.6	6.3 ~ 9V	8.4 ~ 12V	10.5 ~ 15V	14 ~ 20V	16.8 ~ 24V	18.9 ~ 27V	25.2 ~ 36V	33.6 ~ 48V
		RATED CURRENT	3.3A	2.5A	2A	1.5A	1.25A	1.12A	0.84A	0.63A

		DC VOLTAGE	9V	12V	15V	20V	24V	27V	36V	48V		
		CONSTANT CURRENT REGION Note.6	6.3 ~ 9V	8.4 ~ 12V	10.5 ~ 15V	14 ~ 20V	16.8 ~ 24V	18.9 ~ 27V	25.2 ~ 36V	33.6 ~ 48V		
		RATED CURRENT	3.3A	2.5A	2A	1.5A	1.25A	1.12A	0.84A	0.63A		
		CURRENT RANGE	0 ~ 3.3A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.5A	0 ~ 1.25A	0 ~ 1.12A	0 ~ 0.84A	0 ~ 0.63A		
		RATED POWER	29.7W	30W	30W	30W	30W	30.24W	30.24W	30.24W		
	OUTDUT	RIPPLE & NOISE (max.) Note.2	2.6Vp-p	2Vp-p	2.6Vp-p	2.6Vp-p	2.4Vp-p	2.3Vp-p	3.6Vp-p	3.7Vp-p		
	OUTPUT	VOLTAGE ADJ. RANGE Note.5	8.55 ~ 9.9V	11.4 ~ 13.2V	14.5 ~ 16.5V	19 ~ 22V	22.8 ~ 26.4V	25.65 ~ 29.7V	34.2 ~ 39.6V	45.6 ~ 52.8V		
		CURRENT ADJ. RANGE Note.5	2.475 ~ 3.399A	1.875 ~ 2.575A	1.5 ~ 2.06A	1.125 ~ 1.545A	0.938 ~ 1.288A	0.84 ~ 1.1536A	0.63 ~ 0.865A	0.473 ~ 0.649A		
		VOLTAGE TOLERANCE Note.3	±10%									
		LINE REGULATION	±3.0%									
		LOAD REGULATION	±5.0%									
		SETUP TIME	500ms / 230VA	500ms / 230VAC 3000ms / 115VAC at full load								
		VOLTAGE RANGE Note.4	90 ~ 264VAC	90 ~ 264VAC 127 ~ 370VDC								
		FREQUENCY RANGE	47 ~ 63Hz									
		POWER FACTOR (Typ.)	PF>0.95/115VAC, PF>0.9/230VAC at full load (Please refer to "Power Factor Characteristic" curve)									
		TOTAL HARMONIC DISTORTION	THD< 20% wh	THD< 20% when output loading≧70% at 115VAC/230VAC input								
	INPUT	EFFICIENCY (Typ.)	80%	82.5%	83.5%	84%	84%	84.5%	85%	85.5%		
		AC CURRENT (Typ.)	0.4A/115VAC	0.2A/230VAC								
		INRUSH CURRENT (Typ.)	COLD START	35A(twidth=25μs	measured at 50	)% Ipeak) at 230	VAC					
		MAX. No. of PSUs on 16A	64 units (circui	64 units (circuit breaker of type B) / 64 units (circuit breaker of type C) at 230VAC								

	MAX. No. of PSUs on 16A CIRCUIT BREAKER	64 units (circui	64 units (circuit breaker of type B) / 64 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT	<0.5mA / 240V	AC								
	OVER CURRENT	100 ~ 110%									
		Protection type: Constant current limiting, recovers automatically after fault condition is removed									
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.									
PROTECTION	OVERVOLTAGE	10 ~ 14V	14 ~ 17V	17 ~ 22V	23 ~ 26V	27 ~ 34V	31 ~ 35V	40 ~ 50V	53 ~ 63V		
	OVER VOLTAGE	Protection type: Shut down o/p voltage, re-power on to recover									

SHORT CIRCUIT	Hiccup mode, r	rliccup mode, recovers automatically after fault condition is removed.									
OVER VOLTAGE	10 ~ 14V	14 ~ 17V	17 ~ 22V	23 ~ 26V	27 ~ 34V	31 ~ 35V	40 ~ 50V	53 ~ 63V			
	Protection type : Shut down o/p voltage, re-power on to recover										
OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover										
WORKING TEMP.	-30 ~ +50°C (R	30 ~ +50°C (Refer to "Derating Curve")									
WORKING HUMIDITY	20 ~ 95% RH n	on-condensing									
	OVER VOLTAGE  OVER TEMPERATURE  WORKING TEMP.	OVER VOLTAGE         10 ~ 14V           Protection type           OVER TEMPERATURE         Shut down o/p           WORKING TEMP.         -30 ~ +50°C (R	OVER VOLTAGE         10 ~ 14V         14 ~ 17V           Protection type: Shut down o/p           OVER TEMPERATURE         Shut down o/p voltage, re-pow           WORKING TEMP.         -30 ~ +50°C (Refer to "Derating")	OVER VOLTAGE    10 ~ 14V   14 ~ 17V   17 ~ 22V	OVER VOLTAGE    10 ~ 14V   14 ~ 17V   17 ~ 22V   23 ~ 26V	OVER VOLTAGE         10 ~ 14V         14 ~ 17V         17 ~ 22V         23 ~ 26V         27 ~ 34V           Protection type : Shut down o/p voltage, re-power on to recover           OVER TEMPERATURE         Shut down o/p voltage, re-power on to recover           WORKING TEMP.         -30 ~ +50°C (Refer to "Derating Curve")	OVER VOLTAGE  10 ~ 14V	OVER VOLTAGE  10 ~ 14V			

#### TEMP. COEFFICIENT ±0.06%/°C (0 ~ 50°C) VIBRATION 10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes UL1310, TUV EN61347-1, EN61347-2-13, GB19510.14, GB19510.1, CAN/CSA C22.2 No. 223-M91(except for 48V), J61347-1, J61347-2-13, EAC TP TC 004 approved SAFETY STANDARDS WITHSTAND VOLTAGE I/P-O/P-3 75KVAC

	EMC		The street street
		ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH
		EMC EMISSION	Compliance to EN55015, GB17743, GB17625.1,EN61000-3-2 Class C (Pin≧25W), Class D (>70% load) ; EN61000-3-3,EAC TP TC 020
		EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61547, light industry level, criteria A,EAC TP TC 020
		MTBF	625.5Khrs min. MIL-HDBK-217F (25°C)
		DIMENSION	160*46*30mm (L*W*H)

#### NOTE

PACKING

ENVIRONMENT

STORAGE TEMP., HUMIDITY


- 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- Derating may be needed under low input voltage. Please check the static characteristics for more details.
   Output voltage can be adjusted through the SVR1 on the PCB; limit of output constant current level can be adjusted through the SVR2 on the PCB.
- 6. Please refer to "DRIVING METHODS OF LED MODULE"
- 7. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

0.2Kg; 70pcs/15Kg/0.96CUFT

-40 ~ +80°C, 10 ~ 95% RH


- 8. Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.
  9. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.
- 10. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).



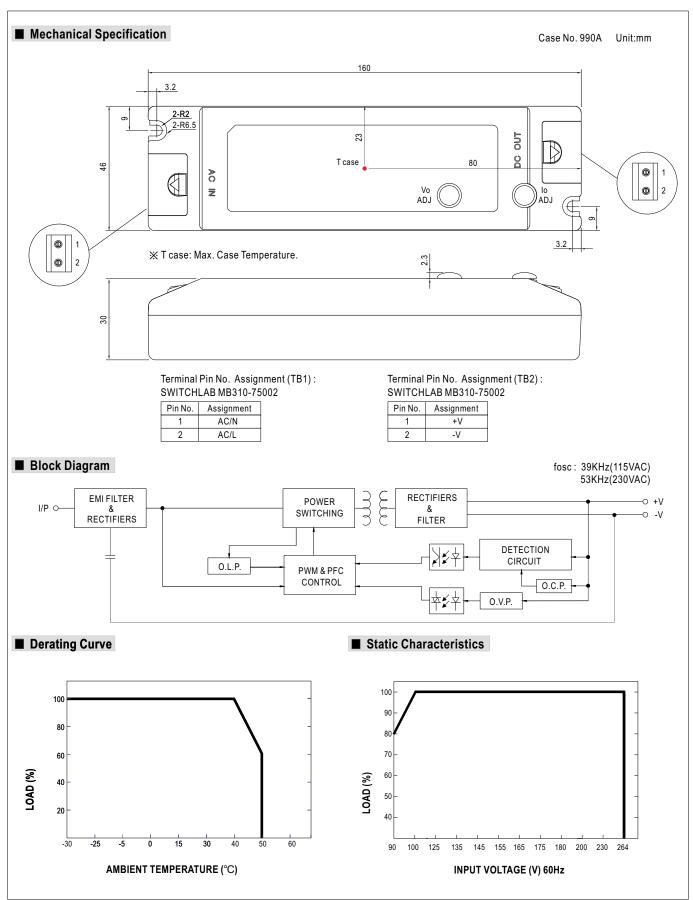




## ■ Power Factor Characteristic

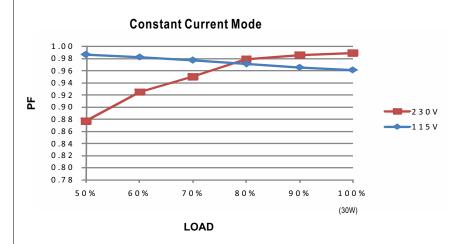


# ■ EFFICIENCY vs LOAD (48V Model)

PLC-30 series possess superior working efficiency that up to 85.5% can be reached in field applications.

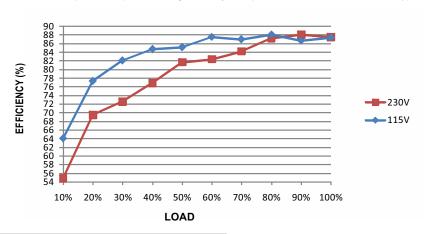

## ■ DRIVING METHODS OF LED MODULE

This LED power supply is suggested to work in constant current mode area (CC) to drive the LEDs.

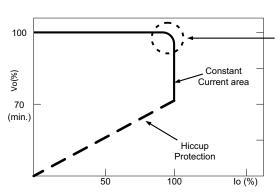

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.