

#### Is Now Part of



## ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



October 1995 Revised May 2003

### 74LCX2244

# Low Voltage Buffer/Line Driver with 5V Tolerant Inputs and Outputs with 26 $\Omega$ Series Resistors in the Outputs

#### **General Description**

The LCX2244 contains eight non-inverting buffers with 3-STATE outputs. The device may be employed as a memory address driver, clock driver and bus-oriented transmitter/receiver. The LCX2244 is designed for low voltage (2.5V or 3.3V)  $V_{\rm CC}$  applications with capability of interfacing to a 5V signal environment. The  $26\Omega$  series resistors help reduce output overshoot and undershoot.

The LCX2244 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.

#### **Features**

- 5V tolerant inputs and outputs
- 2.3V to 3.6V V<sub>CC</sub> specifications provided
- $\blacksquare$  7.5 ns t<sub>PD</sub> max (V<sub>CC</sub> = 3.3V) 10  $\mu$ A I<sub>CC</sub> max
- Power down high impedance inputs and outputs
- $26\Omega$ -series resistors in the outputs
- Supports live insertion/withdrawal (Note 1)
- $\pm 12$  mA output drive ( $V_{CC} = 3.0V$ )
- Implements patented noise/EMI reduction circuitry
- Latch-up performance exceeds 500 mA
- ESD performance:

Human body model > 2000V Machine model > 200V

■ Leadless DQFN package


**Note 1:** To ensure the high-impedance state during power up or down,  $\overline{\text{OE}}$  should be tied to  $V_{CC}$  through a pull-up resistor: the minimum value or the resistor is determined by the current-sourcing capability of the driver.

#### **Ordering Code:**

Order Number	Package Number	Package Description
74LCX2244WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
74LCX2244SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74LCX2244BQ (Preliminary)		20-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 4.5mm
74LCX2244MSA	MSA20	20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide
74LCX2244MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide


Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

## **Logic Symbol**




## **Connection Diagrams**

Pin Assignments for SOIC, SOP, SSOP, and TSSOP



Pad Assignment for DQFN



## **Pin Descriptions**

Pin Names	Description
$\overline{OE}_1, \overline{OE}_2$	3-STATE Output Enable Inputs
I <sub>0</sub> —I <sub>7</sub>	Inputs
O <sub>0</sub> -O <sub>7</sub>	Outputs

## **Truth Tables**

	Inputs		Outputs
	OE <sub>1</sub>	l <sub>n</sub>	(Pins 12, 14, 16, 18)
Ī	٦	L	L
	L	Н	Н
	Н	Х	Z

Inputs		Outputs
OE <sub>2</sub>	In	(Pins 3, 5, 7, 9)
L	Н	L
L	Н	Н
Н	Х	Z

H = HIGH Voltage Level
X = Immaterial
L = LOW Voltage Level
Z = High Impedance

Symbol	Parameter	Value	Conditions	Units
V <sub>CC</sub>	Supply Voltage	-0.5 to +7.0		V
VI	DC Input Voltage	-0.5 to +7.0		V
V <sub>O</sub>	DC Output Voltage	-0.5 to +7.0	Output in 3-STATE	V
		$-0.5$ to $V_{CC} + 0.5$	Output in HIGH or LOW State (Note 3)	v
l <sub>IK</sub>	DC Input Diode Current	-50	V <sub>I</sub> < GND	mA
ок	DC Output Diode Current	-50	V <sub>O</sub> < GND	mA
		+50	V <sub>O</sub> > V <sub>CC</sub>	IIIA
О	DC Output Source/Sink Current	±50		mA
СС	DC Supply Current per Supply Pin	±100		mA
GND	DC Ground Current per Ground Pin	±100		mA
T <sub>STG</sub>	Storage Temperature	-65 to +150		°C

## **Recommended Operating Conditions** (Note 4)

Symbol	Parameter		Min	Max	Units
V <sub>CC</sub>	Supply Voltage	Operating	2.0	3.6	V
		Data Retention	1.5	3.6	V
V <sub>I</sub>	Input Voltage		0.0	5.5	V
Vo	Output Voltage	HIGH or LOW State	0.0	V <sub>CC</sub>	V
		3-STATE	0.0	5.5	V
I <sub>OH</sub> /I <sub>OL</sub>	Output Current	$V_{CC} = 3.0V - 3.6V$		±12.0	
		$V_{CC} = 2.7V - 3.0V$ $V_{CC} = 2.3V - 2.7V$		±8.0	mA
		$V_{CC} = 2.3V - 2.7V$		±4.0	
T <sub>A</sub>	Free-Air Operating Temperature		-40.0	85.0	°C
Δt/ΔV	Input Edge Rate, $V_{IN} = 0.8V - 2.0V$ , $V_{CC} = 3.0V$		0.0	10.0	ns/V

Note 2: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 3:  $I_O$  Absolute Maximum Rating must be observed.

Note 4: Unused inputs must be held HIGH or LOW. They may not float.

#### **DC Electrical Characteristics**

Cumbal	Parameter	Conditions	v <sub>cc</sub>	$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units
Symbol		Conditions	(V)	Min	Max	Units
V <sub>IH</sub>	HIGH Level Input Voltage		2.3 – 2.7	1.7		V
			2.7 – 3.6	2.0		V
V <sub>IL</sub>	LOW Level Input Voltage		2.3 – 2.7		0.7	V
			2.7 – 3.6		8.0	V
V <sub>OH</sub>	HIGH Level Output Voltage	$I_{OH} = -100  \mu A$	2.3 – 3.6	V <sub>CC</sub> - 0.2		
		$I_{OH} = -4 \text{ mA}$	2.3	1.8		
		$I_{OH} = -4 \text{ mA}$	2.7	2.2		V
		$I_{OH} = -6 \text{ mA}$	3.0	2.4		. •
		$I_{OH} = -8mA$	2.7	2.0		
		I <sub>OH</sub> = -12 mA	3.0	2.0		
V <sub>OL</sub>	LOW Level Output Voltage	I <sub>OL</sub> = 100 μA	2.3 – 3.6		0.2	
		I <sub>OL</sub> = 4 mA	2.3		0.6	
		I <sub>OL</sub> = 4 mA	2.7		0.4	V
		I <sub>OL</sub> = 6 mA	3.0		0.55	. •
		I <sub>OL</sub> = 8 mA	2.7		0.6	
		I <sub>OL</sub> = 12 mA	3.0		0.8	
l <sub>l</sub>	Input Leakage Current	$0 \le V_I \le 5.5V$	2.3 – 3.6		±5.0	μΑ
I <sub>OZ</sub>	3-STATE Output Leakage	$0 \le V_O \le 5.5V$	2.3 – 3.6		±5.0	
		$V_I = V_{IH}$ or $V_{IL}$				μΑ

## DC Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	V <sub>CC</sub>	T <sub>A</sub> = -40°0	C to +85°C	Units
Cynnbon	i arameter	Conditions	(V)	Min	Max	Oilles
l <sub>OFF</sub>	Power-Off Leakage Current	$V_I$ or $V_O = 5.5V$	0.0		10.0	μΑ
Icc	Quiescent Supply Current	$V_I = V_{CC}$ or GND	2.3 – 3.6		10.0	μА
		3.6V ≤ V <sub>I</sub> , V <sub>O</sub> ≤ 5.5V (Note 5)	2.3 – 3.6		±10.0	μΛ
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	$V_{IH} = V_{CC} - 0.6V$	2.3 – 3.6		500	μΑ

Note 5: Outputs disabled or 3-STATE only.

## **AC Electrical Characteristics**

			T <sub>A</sub> =	-40°C to +	85°C, R <sub>L</sub> = 5	500Ω		
Cumbal	Parameter	V <sub>CC</sub> = 3.3	3V ± 0.3V	V <sub>CC</sub> =	= 2.7V	V <sub>CC</sub> = 2	.5 ± 0.2V	Units
Symbol	Parameter	C <sub>L</sub> =	50pF	C <sub>L</sub> =	50pF	C <sub>L</sub> =	30pF	Units
		Min	Max	Min	Max	Min	Max	
t <sub>PHL</sub>	Propagation Delay	1.5	7.5	1.5	8.5	1.5	9.0	no
t <sub>PLH</sub>	Data to Output	1.5	7.5	1.5	8.5	1.5	9.0	ns
t <sub>PZL</sub>	Output Enable Time	1.5	9.0	1.5	10.0	1.5	10.5	
t <sub>PZH</sub>		1.5	9.0	1.5	10.0	1.5	10.5	ns
t <sub>PLZ</sub>	Output Disable Time	1.5	7.0	1.5	8.0	1.5	8.4	
t <sub>PHZ</sub>		1.5	7.0	1.5	8.0	1.5	8.4	ns
t <sub>OSHL</sub>	Output to Output Skew (Note 6)		1.0					ns
toslh			1.0					115

Note 6: Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).

## **Dynamic Switching Characteristics**

Symbol	Parameter	Conditions	V <sub>CC</sub>	$T_A = 25^{\circ}C$	Units
Cymbol	i didilicio	Conditions	(V)	Typical	Oille
V <sub>OLP</sub>	Quiet Output Dynamic Peak V <sub>OL</sub>	$C_L = 50 \text{ pF}, V_{IH} = 3.3 \text{V}, V_{IL} = 0 \text{V}$	3.3	0.35	
		$C_L = 30 \text{ pF}, V_{IH} = 2.5 \text{V}, V_{IL} = 0 \text{V}$	2.5	0.25	V
V <sub>OLV</sub>	Quiet Output Dynamic Valley V <sub>OL</sub>	C <sub>L</sub> = 50 pF, V <sub>IH</sub> = 3.3V, V <sub>IL</sub> = 0V	3.3	-0.35	\/
		$C_L = 30 \text{ pF}, V_{IH} = 2.5 \text{V}, V_{IL} = 0 \text{V}$	2.5	-0.25	V

## Capacitance

Symbol	Parameter	Conditions	Typical	Units
C <sub>IN</sub>	Input Capacitance	$V_{CC} = Open, V_I = 0V \text{ or } V_{CC}$	7.0	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$	8.0	pF
C <sub>PD</sub>	Power Dissipation Capacitance	$V_{CC} = 3.3V$ , $V_{I} = 0V$ or $V_{CC}$ , $f = 10$ MHz	25.0	pF

## AC LOADING and WAVEFORMS Generic for LCX Family






FIGURE 1. AC Test Circuit ( $C_L$  includes probe and jig capacitance)


Test	Switch
t <sub>PLH</sub> , t <sub>PHL</sub>	Open
t <sub>PZL</sub> , t <sub>PLZ</sub>	6V at $V_{CC} = 3.3 \pm 0.3V$ $V_{CC} \times 2$ at $V_{CC} = 2.5 \pm 0.2V$
$t_{PZH}, t_{PHZ}$	GND




Waveform for Inverting and Non-Inverting Functions




3-STATE Output High Enable and Disable Times for Logic



Propagation Delay. Pulse Width and t<sub>rec</sub> Waveforms



Setup Time, Hold Time and Recovery Time for Logic



3-STATE Output Low Enable and Disable Times for Logic







FIGURE 2. Waveforms (Input Characteristics; f =1MHz,  $t_r = t_f = 3ns$ )

Symbol	V <sub>cc</sub>		
	3.3V ± 0.3V	2.7V	2.5V ± 0.2V
V <sub>mi</sub>	1.5V	1.5V	V <sub>CC</sub> /2
$V_{mo}$	1.5V	1.5V	V <sub>CC</sub> /2
V <sub>x</sub>	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.15V
V <sub>v</sub>	V <sub>OH</sub> – 0.3V	V <sub>OH</sub> – 0.3V	V <sub>OH</sub> – 0.15V

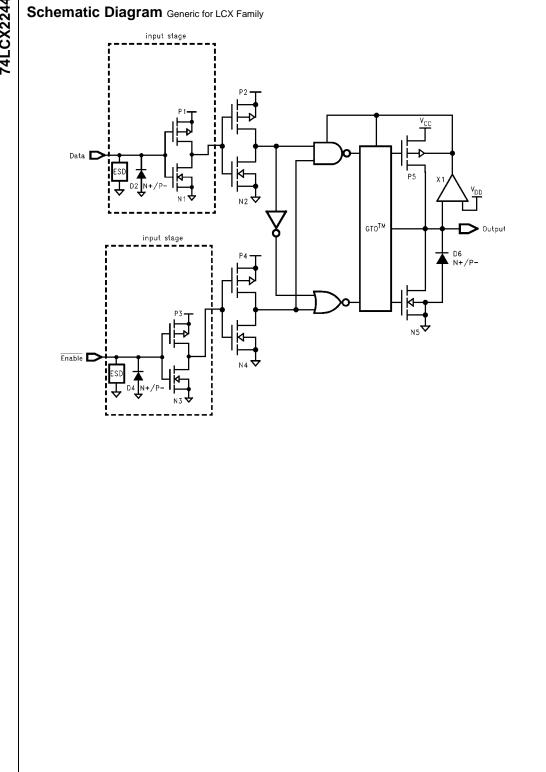


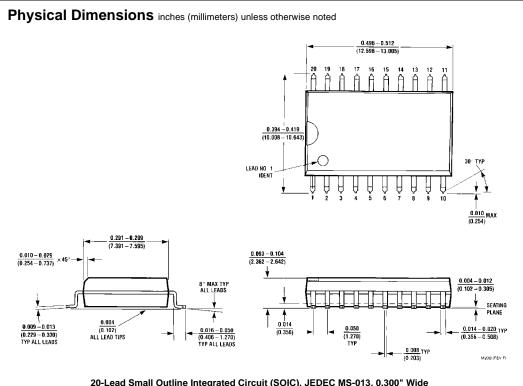



20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Package Number M20B

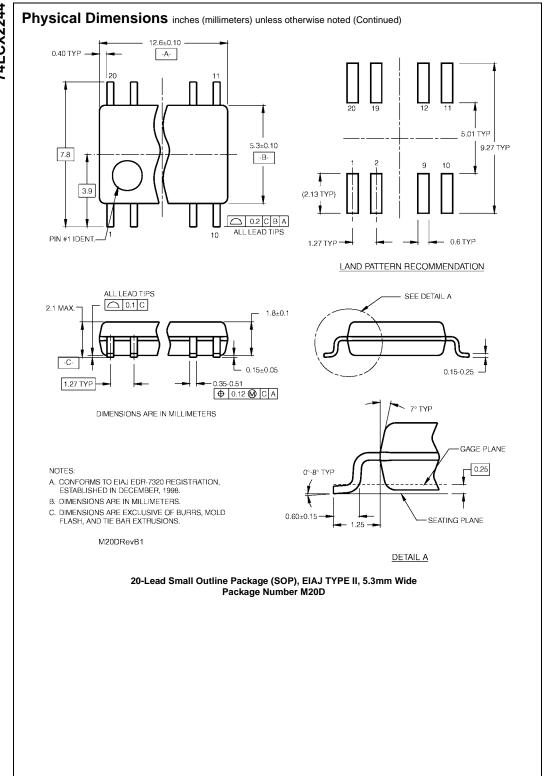

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

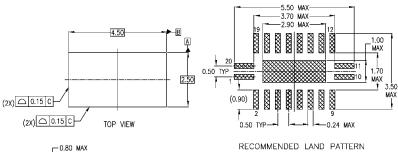






#### NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-241, VARIATION AC
  B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994

#### MLP020BrevA

20-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 4.5mm Package Number MLP020B (Preliminary)

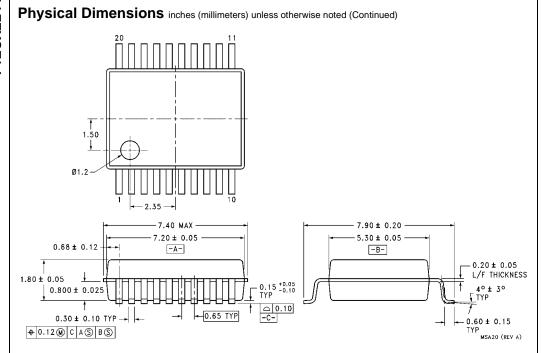

20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide Package Number MSA20

#### Physical Dimensions inches (millimeters) unless otherwise noted (Continued) -A-4.16 7.72 4.4±0.1 -B-6.4 3.2 0.2 C B A PIN #1 IDENT LAND PATTERN RECOMMENDATION □ 0.1 C SEE DETAIL A · 0.90<sup>+0.15</sup> 0.09-0.20 -C-0.1±0.05 0.65 12.00 0.10 M A B C DIMENSIONS ARE IN MILLIMETERS R0.09 MIN GAGE PLANE NOTES: 0.25 A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AC, REF NOTE 6, DATE 7/93. B. DIMENSIONS ARE IN MILLIMETERS. C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND SEATING PLANE TIE BAR EXTRUSIONS. $0.6 \pm 0.1$ R0.09 MIN D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982. 1.00 MTC20RevD1 DETAIL A 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide Package Number MTC20

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

**ON Semiconductor:** 

74LCX2244SJ\_Q 74LCX2244MSA\_Q 74LCX2244WM\_Q