# **X7R Dielectric, 6.3 – 250 VDC (Automotive Grade)**




#### **Overview**

The KEMET Automotive Grade Surface Mount Capacitors in X7R dielectric are suited for a variety of applications requiring proven, reliable performance in harsh environments. Whether underhood or in-cabin, these devices emphasize the vital and robust nature of capacitors required for mission and safety of critical automotive circuits. Stricter testing protocol and inspection criteria have been established for automotive grade products in recognition of potentially harsh environmental conditions. KEMET automotive grade capacitors meet the demanding Automotive Electronics Council's AEC-Q200 qualification requirements.

X7R dielectric features a 125°C maximum operating temperature and is considered temperature stable. The Electronics Industries Alliance (EIA) characterizes X7R dielectric as a Class II material. Components of this classification are fixed, ceramic dielectric capacitors, suited for bypass and decoupling applications, or for frequency discriminating circuits, where Q and stability of capacitance characteristics are not critical. X7R exhibits a predictable change in capacitance with respect to time and voltage, and boasts a minimal change in capacitance with reference to ambient temperature. Capacitance change is limited to ±15% from -55°C to +125°C.

#### **Benefits**

- AEC-Q200 automotive qualified
- -55°C to +125°C operating temperature range
- · Lead (Pb)-free, RoHS and REACH compliant
- Temperature stable dielectric
- EIA 0402, 0603, 0805, 1206, 1210, 1808, 1812, 1825, and 2220 case sizes
- DC voltage ratings of 6.3 V, 10 V, 16 V, 25 V, 50 V, 100 V, 200 V and 250 V
- Capacitance offerings ranging from 10 pF to 22 μF
- Available capacitance tolerances of ±5%, ±10% and ±20%
- Non-polar device, minimizing installation concerns
- 100% pure matte tin-plated termination finish, allowing for excellent solderability



## **Applications**

Typical applications include decoupling, bypass, filtering and transient voltage suppression.



### **Ordering Information**

C	0805	C	225	M	4	R	A	С	AUT0
Ceramic	Case Size (L" x W")	Specification/ Series	Capacitance Code (pF)	Capacitance Tolerance	Rated Voltage (VDC)	Dielectric	Failure Rate/Design	Termination Finish <sup>1</sup>	Packaging/Grade (C-Spec)
	0402 0603 0805 1206 1210 1808 1812 1825 2220	C = Standard	Two significant digits and number of zeros.	J = ±5% K = ±10% M = ±20%	9 = 6.3 8 = 10 4 = 16 3 = 25 5 = 50 1 = 100 2 = 200 A = 250	R = X7R	A = N/A	C = 100% Matte Sn	See "Packaging C-Spec Ordering Options Table"

<sup>&</sup>lt;sup>1</sup> Additional termination finish options may be available. Contact KEMET for details.

### **Packaging C-Spec Ordering Options Table**

Packaging Type <sup>1</sup>	Packaging/Grade Ordering Code (C-Spec) <sup>3</sup>
7" Reel	AUT0
13" Reel/Unmarked	AUT07411 (EIA 0603 and smaller case sizes) AUT07210 (EIA 0805 and larger case sizes)
7" Reel/Unmarked/2 mm pitch <sup>2</sup>	3190
13" Reel/Unmarked/2 mm pitch <sup>2</sup>	3191

<sup>&</sup>lt;sup>1</sup> Reeling tape options (paper or plastic) are dependent on capacitor case size (L" x W") and thickness dimension. See "Chip Thickness/Tape & Reel Packaging Quantities" and "Tape & Reel Packaging Information."

### **Qualification/Certification**

Automotive grade products meet or exceed the requirements outlined by the Automotive Electronics Council. Details regarding test methods and conditions are referenced in document AEC-Q200, Stress Test Qualification for Passive Components. For additional information regarding the Automotive Electronics Council and AEC-Q200, please visit their website at www.aecouncil.com.

## **Environmental Compliance**

Lead (Pb)-free, RoHS, and REACH compliant without exemptions.

<sup>&</sup>lt;sup>2</sup> The 2 mm pitch option allows for double the packaging quantity of capacitors on a given reel size. This option is limited to EIA 0603 (1608 metric) case size devices. For more information regarding 2 mm pitch option see "Tape & Reel Packaging Information."

<sup>&</sup>lt;sup>3</sup> All automotive packaging C-Specs listed exclude the option to laser mark components. Please contact KEMET if you require a laser marked option. For more information see "Capacitor Marking."

<sup>&</sup>lt;sup>3</sup> For additional Information regarding "AUTO" C-Spec options, see "Automotive C-Spec Information."



### **Automotive C-Spec Information**

KEMET automotive grade products meet or exceed the requirements outlined by the Automotive Electronics Council. Details regarding test methods and conditions are referenced in document AEC-Q200, Stress Test Qualification for Passive Components. These products are supported by a Product Change Notification (PCN) and Production Part Approval Process warrant (PPAP).

Automotive products offered through our distribution channel have been assigned an inclusive ordering code C-Spec, "AUTO." This C-Spec was developed in order to better serve small and medium-sized companies that prefer an automotive grade component without the requirement to submit a customer Source Controlled Drawing (SCD) or specification for review by a KEMET engineering specialist. This C-Spec is therefore not intended for use by KEMET OEM automotive customers and are not granted the same "privileges" as other automotive C-Specs. Customer PCN approval and PPAP request levels are limited (see details below.)

#### **Product Change Notification (PCN)**

The KEMET product change notification system is used to communicate primarily the following types of changes:

- Product/process changes that affect product form, fit, function, and/or reliability
- · Changes in manufacturing site
- Product obsolescence

KEMET Automotive	Customer Notifica	tion Due To:	Days Prior To
C-Spec	Process/Product change	Obsolescence*	Implementation
KEMET assigned <sup>1</sup>	Yes (with approval and sign off)	Yes	180 days minimum
AUT0	Yes (without approval)	Yes	90 days minimum

<sup>&</sup>lt;sup>1</sup> KEMET assigned C-Specs require the submittal of a customer SCD or customer specification for review. For additional information contact KEMET.

#### **Production Part Approval Process (PPAP)**

The purpose of the Production Part Approval Process is:

- To ensure that supplier can meet the manufacturability and quality requirements for the purchased parts.
- To provide the evidence that all customer engineering design records and specification requirements are properly understood and fulfilled by the manufacturing organization.
- To demonstrate that the established manufacturing process has the potential to produce the part.


KEMET Automotive		PPAP (Product	Part Approval	Process) Leve	I
C-Spec	1	2	3	4	5
KEMET assigned <sup>1</sup>	•	•	•	•	•
AUT0	0		0		

<sup>&</sup>lt;sup>1</sup> KEMET assigned C-Specs require the submittal of a customer SCD or customer specification for review. For additional information contact KEMET.

- Part number specific PPAP available
- Product family PPAP only



## **Dimensions - Millimeters (Inches)**



EIA Size Code	Metric Size Code	L Length	W Width	T Thickness	B Bandwidth	S Separation Minimum	Mounting Technique
0402	1005	1.00 (0.040) ±0.05 (0.002)	0.50 (0.020) ±0.05 (0.002)		0.30 (0.012) ±0.10 (0.004)	0.30 (0.012)	Solder reflow only
0603¹	1608	1.60 (0.063) ±0.15 (0.006)	0.80 (0.032) ±0.15 (0.006)		0.35 (0.014) ±0.15 (0.006)	0.70 (0.028)	
0805²	2012	2.00 (0.079) ±0.20 (0.008)	1.25 (0.049) ±0.20 (0.008)		0.50 (0.02) ±0.25 (0.010)	0.75 (0.030)	Solder wave or Solder reflow
1206³	3216	3.20 (0.126) ±0.20 (0.008)	1.60 (0.063) ±0.20 (0.008)	See Table 2 for Thickness	0.50 (0.02) ±0.25 (0.010)		
12104	3225	3.20 (0.126) ±0.20 (0.008)	2.50 (0.098) ±0.20 (0.008)		0.50 (0.02) ±0.25 (0.010)	NI/A	
1812	4532	4 50 (0 177) 3 20 (0 126) 0 60 (0 0 24)				N/A	Solder reflow only
2220	5650	5.70 (0.224) ±0.40 (0.016)	5.00 (0.197) ±0.40 (0.016)	0.60 (0.024) ±0.35 (0.014)			

 $<sup>^{1}</sup>$  For capacitance values ≥ 0.56 μF add 0.05 (0.002) to length tolerance dimension.

 $<sup>^{2}</sup>$  For capacitance values 1.0 μF or ≥ 2.7 μF add 0.10 (0.004) to length tolerance dimension.

 $<sup>^3</sup>$  For capacitance value 1.0  $\mu$ F all voltages and 10  $\mu$ F with 25 V add 0.05 (0.002) to length tolerance dimension.

 $<sup>^4</sup>$  For capacitance values ≥ 4.7 μF add 0.02 (0.001) to the width tolerance dimension and 0.10 (0.004) to the length tolerance dimension.



### **Electrical Parameters/Characteristics**

Item	Parameters/Characteristics
Operating Temperature Range	-55°C to +125°C
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	±15%
<sup>1</sup> Aging Rate (Maximum % Capacitance Loss/Decade Hour)	3.0%
<sup>2</sup> Dielectric Withstanding Voltage (DWV)	250% of rated voltage (5±1 seconds and charge/discharge not exceeding 50 mA)
<sup>3</sup> Dissipation Factor (DF) Maximum Limit at 25°C	See Dissipation Factor Limit Table
<sup>4</sup> Insulation Resistance (IR) Minimum Limit at 25°C	See Insulation Resistance Limit Table (Rated voltage applied for 120 ±5 seconds at 25°C)

<sup>&</sup>lt;sup>1</sup> Regarding Aging Rate: Capacitance measurements (including tolerance) are indexed to a referee time of 1,000 hours.

1 kHz ±50 Hz and 1.0 ±0.2  $V_{rms}$  if capacitance  $\leq$  10  $\mu F$ 

120 Hz ±10 Hz and 0.5 ±0.1  $V_{rms}$  if capacitance > 10  $\mu F$ 

Note: When measuring capacitance it is important to ensure the set voltage level is held constant. The HP4284 and Agilent E4980 have a feature known as Automatic Level Control (ALC). The ALC feature should be switched to "ON."

### **Insulation Resistance Limit Table**

EIA Case Size	Rated DC Voltage	1,000 megohm microfarads or 100 GΩ	500 megohm microfarads or 10 GΩ	100 megohm microfarads or 10 GΩ
0402	ALL	< 0.012 µF	≥ 0.012 µF	N/A
0603	≤ 200 V	< 0.047 µF	≥ 0.047 µf < 0.47 µf	≥ 0.47 µf
0003	250 V	N/A	N/A	ALL
0805	≤ 200 V	< 0.15 μF	≥ 0.15 µF < 2.2 µf	≥ 2.2 µf
0805	250 V	< .027 μF	N/A	≥ .027 µF
1206	≤ 200 V	< 0.47 µF	≥ 0.47 µF < 4.7 µf	≥ 4.7 µf
1200	250 V	< 0.12 µF	N/A	≥ 0.12 µF
1210	≤ 200 V	< 0.39 µF	≥ 0.39 µF < 10 µf	≥ 10 µf
1210	250 V	< 0.27 μF	N/A	≥ 0.27 µF
1808	ALL	ALL	N/A	N/A
1812	ALL	< 2.2 μF	≥ 2.2 µF	N/A
1825	ALL	ALL	N/A	N/A
2220	ALL	< 10 μF	≥ 10 µF	N/A
2225	ALL	ALL	N/A	N/A

<sup>&</sup>lt;sup>2</sup> DWV is the voltage a capacitor can withstand (survive) for a short period of time. It exceeds the nominal and continuous working voltage of the capacitor.

<sup>&</sup>lt;sup>3</sup> Capacitance and dissipation factor (DF) measured under the following conditions:

<sup>&</sup>lt;sup>4</sup> To obtain IR limit, divide M $\Omega$ -μF value by the capacitance and compare to G $\Omega$  limit. Select the lower of the two limits.



### **Post Environmental Limits**

High '	Temperature	Life, Biased	Humidity, Mo	oisture Resis	tance
EIA Case Size	Rated DC Voltage	Capacitance	Dissipation Factor (Maximum %)	Capacitance Shift	Insulation Resistance
	< 16	All	7.5		
0402	16/25	All	5.0		
	> 25	All	3.0		
	< 16		7.5		
0603	16/25	< 1.0 μF	5.0		
0003	> 25		3.0		
	All	≥ 1.0 µF	20.0		
	< 16	< 4.7 μF	7.5		
	< 10	≥ 4.7 µF	20.0		
0805	16	< 4.7 μF	5.0		
0805	10	≥ 4.7 µF	20.0		
	25	All	5.0	±20%	10% of Initial
	> 25	All	3.0	120%	limit
	< 16	All	7.5		
1206¹	16/25	All	5.0		
	> 25	All	3.0		
	< 16	All	7.5		
	16	All	5.0		
1210	25	< 10 µF	5.0		
		≥ 10 µF	20.0		
	> 25	All	3.0		
	< 16	All	7.5		
1808 - 2225	16/25	All	5.0		
	> 25	All	3.0		

 $<sup>^{\</sup>text{1}}$  For capacitance values 4.7  $\mu f$  and 10  $\mu F$  DF post value is 20% (all voltages).



# **Dissipation Factor (DF) Limits Table**

EIA Case Size	Rated DC Voltage	Capacitance	Dissipation Factor (Maximum %)
	< 16		5.0
0402	16/25	All	3.5
	> 25		2.5
	< 16		5.0
0603	16/25	< 1.0 µF	3.5
0003	> 25		2.5
	All	≥ 1.0 µF	10.0
	< 16	< 4.7 µF	5.0
	<b>\ 10</b>	≥ 4.7 µF	10.0
0805	16	< 4.7 µF	3.5
0005	10	≥ 4.7 µF	10.0
	25	All	3.5
	> 25	All	2.5
	< 16	All	5.0
1206¹	16/25	All	3.5
	> 25	All	2.5
	< 16	All	5.0
	16	All	3.5
1210	25	< 10 µF	3.5
	25	≥ 10 µF	10.0
	> 25	All	2.5
	< 16		5.0
1808 - 2225	16/25	All	3.5
	> 25		2.5

 $<sup>^{1}</sup>$ For Capacitance values 4.7  $\mu f$  and 10  $\mu F$  DF value is 10% (all voltages).



## **Table 1A - Capacitance Range/Selection Waterfall (0402 - 1206 Case Sizes)**

			se S	Size es		CO	)40	2C				(	06	030	<u> </u>					(	C08	050	<u> </u>					(	C12	060	C		
Capacitance	Сар	Vol	tage	Code	9	8	4	3	5	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	Α	9	8	4	3	5	1	2	Α
	Code	Rat	ed Vo (VDC	ltage ;)	6.3	2	9	22	20	6.3	5	9	25	20	100	200	250	6.3	2	9	22	20	100	200	250	6.3	2	91	25	20	100	200	250
			pacit olera					Pr	odu	ct Av	aila	bilit	y an	d Ch	ip Tł	nick	ness	Coc	les -	- Se	e Tal	ole 2	for	Chip	Thi	ckne	ess C	ime	nsio	ns			
10 - 91 pF*	100 - 910*	J	K	M	ВВ	ВВ	ВВ	ВВ	BB	CF	CF	CF	CF	CF	CF	CF		DN		EB													
100 - 150 pF**	101 - 151**	J	K	M	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF		DN		EB													
180 - 820 pF** 1,000 pF	181 - 820** 102	J	K	M	BB BB	BB BB	BB BB	BB BB	BB BB	CF CF	CF CF	CF CF	CF CF	CF CF	CF CF	CF CF	CF	DN DN	EB EB	EB													
1,200 pF	122	J	K	M	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	DN	EB							
1,500 pF	152	J	K	М	ВВ	ВВ	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN		DN	DN	DN	DN	ЕВ	EB						
1,800 pF	182	J	K	М	ВВ	ВВ	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	DN	EB							
2,200 pF	222	J	K	M	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	DN	EB							
2,700 pF 3,300 pF	272 332	J	K	M	BB BB	BB BB	BB BB	BB BB	BB BB	CF CF	CF CF	CF CF	CF CF	CF CF	CF CF	CF CF	CF CF	DN DN		DN DN	DN DN	DN DN	DN DN	DN DN	DN DN	EB EB							
3,900 pF	392	J	K	M	ВВ	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF	-	DN		DN	DN	DN	DN	DN	DN	EB							
4,700 pF	472	J	K	M	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	DN	EB							
5,600 pF	562	J	K	М	ВВ	ВВ	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	DN	ЕВ	EB						
6,800 pF	682	J	K	М	ВВ	ВВ	ВВ	ВВ	ВВ	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	DN	EB							
8,200 pF	822	J	K	M	ВВ	BB	BB	ВВ	BB	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN	DN	DN	DN	DN	DN	EB							
10,000 pF	103	J	K	M	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF	CF	CF	DN		DN		DN	DN	DN	DN	EB							
12,000 pF 15,000 pF	123 153	J	K	M	BB BB	BB BB	BB BB	BB BB	BB BB	CF CF	CF CF	CF CF	CF CF	CF CF	CF CF			DN DN	DN	DN	DN DN	DN DN	DN DP	DN DN	DN DN	EB EB							
18,000 pF	183	J	K	M	BB	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF			DN	DN		DN	DN	DP	DN	DN	EB							
22,000 pF	223	Ĵ	K	М	ВВ	BB	BB	BB	BB	CF	CF	CF	CF	CF	CF			DN		DN	DN	DN	DP	DN	DN	EB							
27,000 pF	273	J	K	М	ВВ	ВВ	ВВ	ВВ		CF	CF	CF	CF	CF	CF			DN	DN	DN	DN	DN	DP	DE	DG	EB							
33,000 pF	333	J	K	M	ВВ	BB	ВВ	BB		CF	CF	CF	CF	CF	CF			DN	DN	DN	DN	DN	DP	DE	DG	EB							
39,000 pF	393	J	K	M	ВВ	BB	BB	ВВ		CF	CF	CF	CF	CF	CF			DN		DN	DN	DN	DP	DE	DG	EB	EB	EB	EB	EB	EC	EB	EB
47,000 pF	473	J	K	M	BB	BB	BB	ВВ		CF	CF	CF	CF	CF	CF			DN		DN	DN	DN	DE	DG	DG	EB	EB	EB	EB	EB	EC	ED	ED
56,000 pF 68,000 pF	563 683	J	K	M	BB BB	BB BB	BB BB			CF CF	CF CF	CF CF	CF CF	CF CF				DP DP	DP DP	DP DP	DP DP	DP DP	DE DE	DG DG	DG DG	EB EB	EB EB	EB EB	EB EB	EB EB	EB EB	ED ED	ED ED
82,000 pF	823	J	K	M	BB	BB	BB			CF	CF	CF	CF	CF				DP	DP	DP	DP	DP	DE	שט	שט	EB	EB	EB	EB	EB	EB	ED	ED
0.10 μF	104	Ĵ	K	М	ВВ	BB	BB			CF	CF	CF	CF	CF				DN	DN	DN	DN	DN	DE			EB	EB	EB	EB	EB	EB	EM	EM
0.12 μF	124	J	K	М	İ					CF	CF	CF	CF	CF				DN	DN	DN	DN	DP	DG			EC	EC	EC	EC	EC	EC	EG	EM
0.15 μF	154	J	K	М						CF	CF	CF	CF	CF				DN	DN	DN	DN	DP	DG			EC	EC	EC	EC	EC	EC	EG	EG
0.18 μF	184	J	K	M						CF	CF	CF	CF					DN		DN	DN	DP	DG			EC	EC	EC	EC	EC	EC	EM	EM
0.22 μF	224	J	K	M						CF	CF	CF	CF					DN		DN	DN	DP	DG			EC	EC	EC	EC	EC	EC	EG	EG
0.27 μF	274 334	J	K	M						CF CF	CF CF	CF CF						DP DP	DP DP	DP DP	DP DP	DP DP				EB EB	EB EB	EB EB	EB EB	EC EC	EM EG		
0.33 μF 0.39 μF	394	J	K	M						CF	CF	CF						DG	DG	DG	DG	DE				EB	EB	EB	EB	EC	EG		
0.47 μF	474	J	K	M						CF	CF	CF						DP	DP	DP	DP	DE				EC	EC	EC	EC	EC	EG		
0.56 μF	564	J	K	М														DP	DP	DP	DG	DH				ED	ED	ED	ED	EC	EM		
0.68 μF	684	J	K	М						1								DP	DP	DP	DG	DH				EE	EE	EE	EE	ED	EM		
0.82 μF	824	J	K	M						<b>.</b>	٠	٥						DP	DP	DP	DG					EF	EF	EF	EF	ED	EH		
1.0 μF	105	J	K	M						CJ,	CJ,	CJ,						DP	DP	DP	DG					EF	EF	EF	EG	ED	EH		
1.2 μF 1.5 μF	125 155	J	K	M															DE DG							ED EF	ED EF	ED EF		EH			
1.8 μF	185	J	K	M														DG	DG	DG						ED	ED			EH			
2.2 μF	225	Ĵ	K	M															DG							ED	ED	ED					
2.7 μF	275	J	K	М																						EN		EN	EH				
3.3 μF	335	J	K	M																						ED	ED	ED	EH				
3.9 μF	395	J Dat	K od Vo	M     Itage						<u> </u>	10				_	_	_	<u> </u>					_	_	_	EF		EF			_	_	_
		nal	(VDC		6.3	6.3						9	25	20	100	200	250	6.3	2	9	22	22	100	200	250	6.3	2	16	22	20	9	200	250
Capacitance	Cap Code	Vol	tage	Code	9	9 8 4 3 5 9				9 8 4 3 5 1 2 A 9					9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A			
			Case Size /Series			C	0402	2C					C06	03C							C08	05C							C12	06C			

<sup>\*</sup>Capacitance range includes E24 decade values only (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82, and 91.)

<sup>\*\*</sup>Capacitance range includes E12 decade values only. (i.e., 10, 12, 15, 18, 22, 27, 33, 39, 47, 56, 68, and 82.)

 $xx^1$  Available only in K and M tolerances.



## Table 1A - Capacitance Range/Selection Waterfall (0402 - 1206 Case Sizes) cont'd

			se S Seri	Size es		CO	40	2C				(	C06	030	C					(	C08	05	C					(	C12	060	)		
Capacitance	Cap	Volt	age (	Code	9	8	4	3	5	9	8	4	3	5	1	2	Α	9	8	4	3	5	1	2	Α	9	8	4	3	5	1	2	Α
Capacitance	Code		d Vo (VDC	ltage )	6.3	10	16	25	20	6.3	10	91	25	20	100	200	250	6.3	10	16	25	20	100	200	250	6.3	9	16	25	20	100	200	250
			acita Ierai		Product Availability and Unip Thickness Codes – See Table 2 for Chip Th											p Thi	ckne	ess [	Dime	nsio	ns												
4.7 μF	475	J	K	М														DG	DG	DG						EF	EH	EH	EH				
5.6 μF	565	J	K	M														l								EH	EH	EH					
6.8 μF	685	J	K	М																						EH	EH	EH					
8.2 μF	825	J	K	M																						EH	EH	EH					
10 μF	106	J	K	М														DH	DH							EH	EH	EH	EH				
			Rated Voltage (VDC)			10	16	25	50	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250
Capacitance	Cap Code	Volt	age (	Code	9	8	4	3	5	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	Α	9	8	4	3	5	1	2	Α
		Case Size /Series				C	0402	2C					C06	03C							C08	05C	;						C12	06C			

<sup>\*</sup>Capacitance range Includes E24 decade values only. (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82 and 91)

Table 1B - Capacitance Range/Selection Waterfall (1210 - 2220 Case Sizes)

			se S Serio					C12	100	;			C'	1808	BC		C	181:	2C			C18	250	;		C	222	OC	
Capacitance	Cap	Volt	age (	Code	9	8	4	3	5	1	2	Α	5	1	2	3	5	1	2	A	5	1	2	Α	3	5	1	2	A
Capacitance	Code		d Vol		6.3	10	16	25	20	100	200	250	20	100	200	25	20	100	200	250	20	100	200	250	25	20	100	200	250
			acita Ieran				P	rodu	ct Av	ailab	ility	and (	Chip	Thic	knes	s Co	des -	See	Tabl	e 2 f	or Ch	ip Tl	hickn	ess	Dime	nsio	18		
10 - 91 pF*	100 - 910*	J	K	М	FB	FB	FB	FB	FB	FB	FB																		
100 - 270 pF**	101 - 271**	J	K	M	FB	FB	FB	FB	FB	FB	FB																		
330 pF	331	J	K	M	FB	FB	FB	FB	FB	FB	FB		LF	LF	LF														
390 pF	391	J	K	M	FB	FB	FB	FB	FB	FB	FB		LF	LF	LF														
470 - 820 pF**	471 - 821**	J	K	M	FB	FB	FB	FB	FB	FB	FB		LF	LF	LF	GB	GB	GB	GB										
1,000 pF	102	J	K	М	FB	FB	FB	FB	FB	FB	FB		LF	LF	LF	GB	GB	GB	GB										
1,200 pF	122	J	K	M	FB	FB	FB	FB	FB	FB	FB		LF	LF	LF	GB	GB	GB	GB						l				
1,500 pF	152	J	K	М	FB	FB	FB	FB	FB	FB	FE		LF	LF	LF	GB	GB	GB	GB		İ				İ				
1,800 pF	182	J	K	М	FB	FB	FB	FB	FB	FB	FE		LF	LF	LF	GB	GB	GB	GB		İ				İ				
2,200 pF	222	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LF	LF	LF	GB	GB	GB	GB		İ				İ				
2,700 pF	272	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LF	LF	LF	GB	GB	GB	GB						İ				
3,300 pF	332	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LF	LF		GB	GB	GB	GB		l				l				
3,900 pF	392	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LF	LF		GB	GB	GB	GB		İ				İ				
4,700 pF	472	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GD						İ				
5,600 pF	562	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GH						İ				
6,800 pF	682	J	К	М	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB					П	JE	JE		
8,200 pF	822	J	К	М	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB	l				l	JE	JE		
10,000 pF	103	J	К	М	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB	l				l	JE	JE		
12,000 pF	123	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB	l				l	JE	JE		
15,000 pF	153	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB	ĺ				İ	JE	JE		
			d Vol		6.3	10	16	25	20	100	200	250	20	100	200	25	20	100	200	250	20	90	200	250	25	20	100	200	250
Capacitance	Cap Code		age (		9	8	4	3	5	1	2	A	5	1	2	3	5	1	2	A	5	1	2	A	3	5	1	2	Α
·	-		se S Serie					C12	10C				С	1808	C		C	1812	C.			C18	25C			С	2220	C	

<sup>\*</sup>Capacitance range Includes E24 decade values only. (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82 and 91)

<sup>\*\*</sup>Capacitance range Includes E12 decade values only. (i.e., 10, 12, 15, 18, 22, 27, 33, 39, 47, 56, 68 and 82)  $xx^1$  Available only in K andM tolerance.

<sup>\*\*</sup>Capacitance range Includes E12 decade values only. (i.e., 10, 12, 15, 18, 22, 27, 33, 39, 47, 56, 68 and 82)



## Table 1B - Capacitance Range/Selection Waterfall (1210 - 2220 Case Sizes) cont'd

			se S Serie					C12	100	;			C1	1808	BC		C.	181:	2C			C18	250	;		C	222	0C	
Capacitance	Cap	Volt	tage C	Code	9	8	4	3	5	1	2	A	5	1	2	3	5	1	2	A	5	1	2	A	3	5	1	2	A
Capacitance	Code	Cap	d Vol (VDC) pacita	nce	6.3	10	9 9	72 120	S Av	2 2 3	700 Vtility	520 bne	Chin	E Thic	700 2004	25	2 2 2	190	e Tabl	520 5 c e	25 25	e in Ti	700 10km	250	52 amin	S neion	5	200	250
		To	leran												Kiles						01 (1	וו אוו	IICKII	1622	illie	115101			
18,000 pF	183	J	K	M	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB						JE	JE		
22,000 pF	223	J	K	M	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB		НВ	НВ	НВ		JE	JE		
27,000 pF	273	J	K	М	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB		НВ	НВ	НВ		JE	JE		
33,000 pF	333	J	K	M	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB		НВ	НВ	НВ		JB	JB		
39,000 pF	393	J	K	M	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB		НВ	НВ	НВ		JB	JB		
47,000 pF	473	J	K	M	FB	FB	FB	FB	FB	FB	FB	FB	LD	LD		GB	GB	GB	GB	GB		НВ	НВ	НВ		JB	JB		
56,000 pF	563	J	K	M	FB	FB	FB	FB	FB	FB	FC	FC	LD	LD		GB	GB	GB	GB	GB		НВ	НВ	НВ		JB	JB		
68,000 pF	683	J	K	M	FB	FB	FB	FB	FB	FB	FC	FC	LD			GB	GB	GB	GB	GB		НВ	НВ	НВ		JB	JB	10	10
82,000 pF	823	J	K	M	FB	FB	FB	FB	FB	FC	FF	FF	LD			GB	GB	GB	GB	GB		НВ	НВ	НВ		JB	JC	JC	JC
0.10 μF	104	J	K	M	FB	FB	FB	FB	FB	FD FD	FG	FG FH	LD			GB	GB	GB	GB	GB		HB	НВ	НВ		JB	JC	JC	JC
0.12 μF	124 154	J	K	M	FB	FB	FB FC	FB FC	FB FC	FD	FM	FM	LD LD			GB	GB GB	GB GB	GB GE	GB GE		НВ	HB HB	HB		JB	JC	JC	JC
0.15 μF		J	K		FC FC	FC FC	FC	FC	FC		FK	FK	L L D			GB GB	GB	GB	GG			НВ				JB	JC	JC	JC
0.18 µF	184	J	K	M						FD FD		FK	Lυ			GB	GB			GG GG		НВ	НВ	НВ		JB	JC	JC	JC
0.22 μF	224	J	K	M	FC FC	FC FC	FC	FC	FC	FD	FK FP	FP				GB	GB	GB	GG	GG		НВ	HB HB	НВ		JB	JC	JC	JC
0.27 μF	274 334	J	K	M	FD	FD	FC FD	FC FD	FC FD	FD	FM	FM				GB	GB	GG	GG	GG		HB	НВ	HB		JC	JC	JC	JC
0.33 μF 0.39 μF	334 394	J	K	M	FD	FD	FD	FD	FD	FD	FK	FK	ł			GB	GB	GG	GG	GG		HD	HD	HD		JC	JC	JC	JC
0.39 μF 0.47 μF	394 474	J	K	M	FD	FD	FD	FD	FD	FD	FS	FS	ł			GB	GB	GG	GJ	GJ		HD	HD	HD	l	JC	JC	JC	JC
0.47 μF 0.56 μF	564	J	K	M	FD	FD	FD	FD	FD	FF	гэ	гэ	ł			GC	GC	GG	GJ	GJ		HD	HD	HD		JD	JD	JD	JD
0.56 μF 0.68 μF	684	J	K	M	FD	FD	FD	FD	FD	FG						GC	GC	GG				HD	HD	HD		JD	JD	JD	JD
0.82 μF	824	J	K	M	FF	FF	FF	FF	FF	FL						GE	GE	GG				HF	HF	HF		JF	JF	JF	JF
0.02 μT 1.0 μF	105	J	K	M	FH	FH	FH	FH	FH	FM			i			GE	GE	GG				HF	HF	HF		JF	JF	JF	JF
1.0 μF	125	J	K	M	FH	FH	FH	FH	FG	FH			i			GB	GB	GB								JC	31	31	JI
1.5 μF	155	J	K	M	FH	FH	FH	FH	FG	FM			i			GC	GC	GC								JC			
1.8 μF	185	J	K	M	FH	FH	FH	FH	FG	FJ						GE	GE	GE								JD			
2.2 μF	225	J	K	M	FJ	FJ	FJ	FJ	FG	FK						GO	GO	GG								JF			
2.7 μF	275	Ĵ	K	M	FE	FE	FE	FG	FH	' ' '			l			GJ	GJ	GJ								0.			
3.3 μF	335	Ĵ	K	M	FF	FF	FF	FM	FM				l			GL	GL	GL											
3.9 µF	395	Ĵ	K	М	FG	FG	FG	FG	FK				l			-									l				
4.7 μF	475	Ĵ	K	М	FC	FC	FC	FG	FS				l			GK	GK				l				l	JF			
5.6 μF	565	Ĵ	K	М	FF	FF	FF	FH								l													
6.8 μF	685	Ĵ	K	М	FG	FG	FG	FM																					
8.2 µF	825	Ĵ	K	М	FH	FH	FH	FK																					
10 μF	106	J	K	М	FH	FH	FH	FS								GK										JO			
22 μF	226	J	K	М	FS	FS																							
			d Vol	•	6.3	10	16	25	20	100	200	250	20	100	200	25	20	100	200	250	20	100	200	250	25	20	100	200	250
Capacitance	Cap Code	Volt	age C	ode	9	8	4	3	5	1	2	Α	5	1	2	3	5	1	2	Α	5	1	2	Α	3	5	1	2	Α
Supuortanio	cap couc	Ca	se S Serie	ize					10C					1808		_		1812					25C				2220		

<sup>\*</sup>Capacitance range Includes E24 decade values only. (i.e., 10, 11, 12, 13, 15, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 43, 47, 51, 56, 62, 68, 75, 82 and 91)

<sup>\*\*</sup>Capacitance range Includes E12 decade values only. (i.e., 10, 12, 15, 18, 22, 27, 33, 39, 47, 56, 68 and 82)



## Table 2 - Chip Thickness/Tape & Reel Packaging Quantities

Thickness	Case	Thickness ±	Paper Q	uantity <sup>1</sup>	Plastic (	Quantity
Code	Size <sup>1</sup>	Range (mm)	7" Reel	13" Reel	7" Reel	13" Reel
BB	0402	0.50 ± 0.05	10,000	50,000	0	0
CF	0603	0.80 ± 0.07*	4,000	15,000	0	0
CJ	0603	0.80 ± 0.15*	4,000	15,000	0	0
DN	0805	0.78 ± 0.10*	4,000	15,000	0	0
DP	0805	0.90 ± 0.10*	4,000	15,000	0	0
DE	0805	1.00 ± 0.10	0	0	2,500	10,000
DG	0805	1.25 ± 0.15	0	0	2,500	10,000
DH	0805	1.25 ± 0.20	0	0	2,500	10,000
EB	1206	0.78 ± 0.10	4,000	10,000	4,000	10,000
EC	1206	0.90 ± 0.10	0	0	4,000	10,000
EN	1206	0.95 ± 0.10	0	0	4,000	10,000
ED	1206	1.00 ± 0.10	0	0	2,500	10,000
EE	1206	1.10 ± 0.10	0	0	2,500	10,000
EF	1206	1.20 ± 0.15	0	0	2,500	10,000
EM	1206	1.25 ± 0.15	0	0	2,500	10,000
EG	1206	1.60 ± 0.15	0	0	2,000	8,000
EH	1206	1.60 ± 0.20	0	0	2,000	8,000
FB	1210	0.78 ± 0.10	0	0	4,000	10,000
FC	1210	0.90 ± 0.10	0	0	4,000	10,000
FD	1210	0.95 ± 0.10	0	0	4,000	10,000
FE	1210	1.00 ± 0.10	0	0	2,500	10,000
FF	1210	1.10 ± 0.10	0	0	2,500	10,000
FG	1210	1.25 ± 0.15	0	0	2,500	10,000
FL	1210	1.40 ± 0.15	0	0	2,000	8,000
FH	1210	1.55 ± 0.15	0	0	2,000	8,000
FP	1210	1.60 ± 0.20	0	0	2,000	8,000
FM	1210	1.70 ± 0.20	0	0	2,000	8,000
FJ	1210	1.85 ± 0.20	0	0	2,000	8,000
FK	1210	2.10 ± 0.20	0	0	2,000	8,000
FS	1210	2.50 ± 0.30	0	0	1,000	4,000
Thickness	Case	Thickness ±	7" Reel	13" Reel	7" Reel	13" Reel
Code	Size1	Range (mm)	Paper Q	uantity <sup>1</sup>	Plastic (	Quantity

Package quantity based on finished chip thickness specifications.

<sup>&</sup>lt;sup>1</sup> If ordering using the 2 mm Tape & Reel pitch option, the packaging quantity outlined in the table above will be doubled. This option is limited to EIA 0603 (1608 metric) case size devices. For more information regarding 2 mm pitch option see "Tape & Reel Packaging Information."



## Table 2 - Chip Thickness/Tape & Reel Packaging Quantities cont'd.

Thickness	Case	Thickness ±	Paper Q	uantity <sup>1</sup>	Plastic (	Quantity
Code	Size <sup>1</sup>	Range (mm)	7" Reel	13" Reel	7" Reel	13" Reel
NA	1706	0.90 ± 0.10	0	0	4,000	10,000
NC	1706	1.00 ± 0.15	0	0	4,000	10,000
LD	1808	0.90 ± 0.10	0	0	2,500	10,000
LF	1808	1.00 ± 0.15	0	0	2,500	10,000
GB	1812	1.00 ± 0.10	0	0	1,000	4,000
GC	1812	1.10 ± 0.10	0	0	1,000	4,000
GD	1812	1.25 ± 0.15	0	0	1,000	4,000
GE	1812	1.30 ± 0.10	0	0	1,000	4,000
GH	1812	1.40 ± 0.15	0	0	1,000	4,000
GG	1812	1.55 ± 0.10	0	0	1,000	4,000
GK	1812	1.60 ± 0.20	0	0	1,000	4,000
GJ	1812	1.70 ± 0.15	0	0	1,000	4,000
GL	1812	1.90 ± 0.20	0	0	500	2,000
GO	1812	2.50 ± 0.20	0	0	500	2,000
HB	1825	1.10 ± 0.15	0	0	1,000	4,000
HD	1825	1.30 ± 0.15	0	0	1,000	4,000
HF	1825	1.50 ± 0.15	0	0	1,000	4,000
JB	2220	1.00 ± 0.15	0	0	1,000	4,000
JC	2220	1.10 ± 0.15	0	0	1,000	4,000
JD	2220	1.30 ± 0.15	0	0	1,000	4,000
JE	2220	1.40 ± 0.15	0	0	1,000	4,000
JF	2220	1.50 ± 0.15	0	0	1,000	4,000
J0	2220	2.40 ± 0.15	0	0	500	2,000
Thickness	Case	Thickness ±	7" Reel	13" Reel	7" Reel	13" Reel
Code	Size1	Range (mm)	Paper Q	uantity <sup>1</sup>	Plastic (	Quantity

Package quantity based on finished chip thickness specifications.

<sup>&</sup>lt;sup>1</sup> If ordering using the 2 mm Tape & Reel pitch option, the packaging quantity outlined in the table above will be doubled. This option is limited to EIA 0603 (1608 metric) case size devices. For more information regarding 2 mm pitch option see "Tape & Reel Packaging Information."



Table 3 - Chip Capacitor Land Pattern Design Recommendations per IPC-7351


EIA Size Code	Metric Size Code	ı	Density Level A: Maximum (Most) Land Protrusion (mm)				ı	Density Level B: Median (Nominal) Land Protrusion (mm)				Density Level C: Minimum (Least) Land Protrusion (mm)				
Oode	Code	С	Y	Х	V1	V2	С	Y	X	V1	V2	С	Υ	X	V1	V2
0402	1005	0.50	0.72	0.72	2.20	1.20	0.45	0.62	0.62	1.90	1.00	0.40	0.52	0.52	1.60	0.80
0603	1608	0.90	1.15	1.10	4.00	2.10	0.80	0.95	1.00	3.10	1.50	0.60	0.75	0.90	2.40	1.20
0805	2012	1.00	1.35	1.55	4.40	2.60	0.90	1.15	1.45	3.50	2.00	0.75	0.95	1.35	2.80	1.70
1206	3216	1.60	1.35	1.90	5.60	2.90	1.50	1.15	1.80	4.70	2.30	1.40	0.95	1.70	4.00	2.00
1210	3225	1.60	1.35	2.80	5.65	3.80	1.50	1.15	2.70	4.70	3.20	1.40	0.95	2.60	4.00	2.90
1210¹	3225	1.50	1.60	2.90	5.60	3.90	1.40	1.40	2.80	4.70	3.30	1.30	1.20	2.70	4.00	3.00
1812	4532	2.15	1.60	3.60	6.90	4.60	2.05	1.40	3.50	6.00	4.00	1.95	1.20	3.40	5.30	3.70
2220	5650	2.75	1.70	5.50	8.20	6.50	2.65	1.50	5.40	7.30	5.90	2.55	1.30	5.30	6.60	5.60

<sup>&</sup>lt;sup>1</sup> Only for capacitance values ≥ 22 μF

Density Level A: For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes. KEMET only recommends wave soldering of EIA 0603, 0805, and 1206 case sizes.

Density Level B: For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes. Density Level C: For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC Standard 7351 (IPC-7351).

Image below based on Density Level B for an EIA 1210 case size.





## **Soldering Process**


#### **Recommended Soldering Technique:**

- Solder wave or solder reflow for EIA case sizes 0603, 0805 and 1206
- · All other EIA case sizes are limited to solder reflow only

#### **Recommended Reflow Soldering Profile:**

The KEMET families of surface mount multilayer ceramic capacitors (SMD MLCCs) are compatible with wave (single or dual), convection, IR or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. The KEMET recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/ J-STD-020 standard for moisture sensitivity testing. These devices can safely withstand a maximum of three reflow passes at these conditions.

Profile Feature	Terminati	ion Finish
1 Tome Teature	SnPb	100% Matte Sn
Preheat/Soak		
Temperature Minimum (T <sub>Smin</sub> )	100°C	150°C
Temperature Maximum (T <sub>Smax</sub> )	150°C	200°C
Time ( $t_s$ ) from $T_{smin}$ to $T_{smax}$	60 - 120 seconds	60 - 120 seconds
Ramp-Up Rate (T <sub>L</sub> to T <sub>P</sub> )	3°C/second maximum	3°C/second maximum
Liquidous Temperature (T <sub>L</sub> )	183°C	217°C
Time Above Liquidous (t <sub>L</sub> )	60 - 150 seconds	60 - 150 seconds
Peak Temperature (T <sub>P</sub> )	235°C	260°C
Time Within 5°C of Maximum Peak Temperature (t <sub>p</sub> )	20 seconds maximum	30 seconds maximum
Ramp-Down Rate $(T_p \text{ to } T_L)$	6°C/second maximum	6°C/second maximum
Time 25°C to Peak Temperature	6 minutes maximum	8 minutes maximum

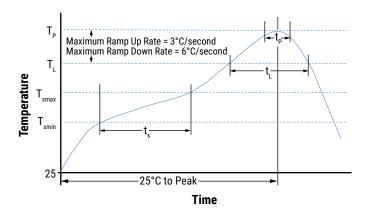


Note: All temperatures refer to the center of the package, measured on the capacitor body surface that is facing up during assembly reflow.

## **Storage & Handling**

Ceramic chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature – reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulfur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within 1.5 years of receipt.



## **Construction (Typical)**

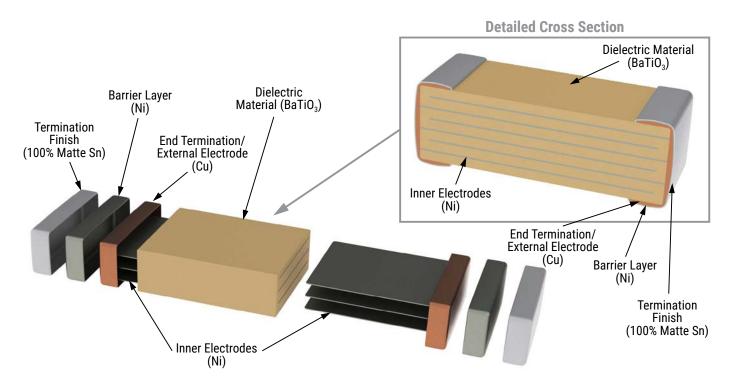



### **Capacitor Marking (Optional):**


These surface mount multilayer ceramic capacitors are normally supplied unmarked. If required, they can be marked as an extra cost option. Marking is available on most KEMET devices, but must be requested using the correct ordering code identifier(s). If this option is requested, two sides of the ceramic body will be laser marked with a "K" to identify KEMET, followed by two characters (per EIA-198 - see table below) to identify the capacitance value. EIA 0603 case size devices are limited to the "K" character only.

Laser marking option is <u>not</u> available on:

- COG, ultra stable X8R and Y5V dielectric devices.
- EIA 0402 case size devices.
- EIA 0603 case size devices with flexible termination option.
- KPS commercial and automotive grade stacked
- · X7R dielectric products in capacitance values outlined below.

<b>EIA Case Size</b>	<b>Metric Size Code</b>	Capacitance
0603	1608	≤ 170 pF
0805	2012	≤ 150 pF
1206	3216	≤ 910 pF
1210	3225	≤ 2,000 pF
1808	4520	≤ 3,900 pF
1812	4532	≤ 6,700 pF
1825	4564	≤ 0.018 µF
2220	5650	≤ 0.027 µF
2225	5664	≤ 0.033 µF

Marking appears in legible contrast. Illustrated below is an example of an MLCC with laser marking of "KA8", which designates a KEMET device with rated capacitance of 100 µF. Orientation of marking is vendor optional.

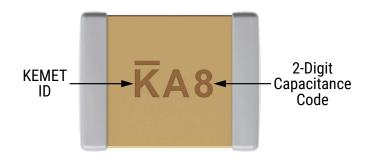



# **Capacitor Marking (Optional) cont'd**

	С	apacita	nce (p	F) For \	<u>/arious</u>	Alpha/	Numera	al Identif	iers	
Alpha						Numera	ıl			
Alpha Character	9	0	1	2	3	4	5	6	7	8
Cilaracter					Capa	citance	e (pF)			
Α	0.10	1.0	10	100	1,000	10,000	100,000	1,000,000	10,000,000	100,000,000
В	0.11	1.1	11	110	1,100	11,000	110,000	1,100,000	11,000,000	110,000,000
С	0.12	1.2	12	120	1,200	12,000	120,000	1,200,000	12,000,000	120,000,000
D	0.13	1.3	13	130	1,300	13,000	130,000	1,300,000	13,000,000	130,000,000
Е	0.15	1.5	15	150	1,500	15,000	150,000	1,500,000	15,000,000	150,000,000
F	0.16	1.6	16	160	1,600	16,000	160,000	1,600,000	16,000,000	160,000,000
G	0.18	1.8	18	180	1,800	18,000	180,000	1,800,000	18,000,000	180,000,000
Н	0.20	2.0	20	200	2,000	20,000	200,000	2,000,000	20,000,000	200,000,000
J	0.22	2.2	22	220	2,200	22,000	220,000	2,200,000	22,000,000	220,000,000
K	0.24	2.4	24	240	2,400	24,000	240,000	2,400,000	24,000,000	240,000,000
L	0.27	2.7	27	270	2,700	27,000	270,000	2,700,000	27,000,000	270,000,000
М	0.30	3.0	30	300	3,000	30,000	300,000	3,000,000	30,000,000	300,000,000
N	0.33	3.3	33	330	3,300	33,000	330,000	3,300,000	33,000,000	330,000,000
Р	0.36	3.6	36	360	3,600	36,000	360,000	3,600,000	36,000,000	360,000,000
Q	0.39	3.9	39	390	3,900	39,000	390,000	3,900,000	39,000,000	390,000,000
R	0.43	4.3	43	430	4,300	43,000	430,000	4,300,000	43,000,000	430,000,000
S	0.47	4.7	47	470	4,700	47,000	470,000	4,700,000	47,000,000	470,000,000
T	0.51	5.1	51	510	5,100	51,000	510,000	5,100,000	51,000,000	510,000,000
U	0.56	5.6	56	560	5,600	56,000	560,000	5,600,000	56,000,000	560,000,000
V	0.62	6.2	62	620	6,200	62,000	620,000	6,200,000	62,000,000	620,000,000
W	0.68	6.8	68	680	6,800	68,000	680,000	6,800,000	68,000,000	680,000,000
Х	0.75	7.5	75	750	7,500	75,000	750,000	7,500,000	75,000,000	750,000,000
Υ	0.82	8.2	82	820	8,200	82,000	820,000	8,200,000	82,000,000	820,000,000
Z	0.91	9.1	91	910	9,100	91,000	910,000	9,100,000	91,000,000	910,000,000
а	0.25	2.5	25	250	2,500	25,000	250,000	2,500,000	25,000,000	250,000,000
b	0.35	3.5	35	350	3,500	35,000	350,000	3,500,000	35,000,000	350,000,000
d	0.40	4.0	40	400	4,000	40,000	400,000	4,000,000	40,000,000	400,000,000
е	0.45	4.5	45	450	4,500	45,000	450,000	4,500,000	45,000,000	450,000,000
f	0.50	5.0	50	500	5,000	50,000	500,000	5,000,000	50,000,000	500,000,000
m	0.60	6.0	60	600	6,000	60,000	600,000	6,000,000	60,000,000	600,000,000
n	0.70	7.0	70	700	7,000	70,000	700,000	7,000,000	70,000,000	700,000,000
t	0.80	8.0	80	800	8,000	80,000	800,000	8,000,000	80,000,000	800,000,000
у	0.90	9.0	90	900	9,000	90,000	900,000	9,000,000	90,000,000	900,000,000



### **Tape & Reel Packaging Information**

KEMET offers multilayer ceramic chip capacitors packaged in 8, 12 and 16 mm tape on 7" and 13" reels in accordance with EIA Standard 481. This packaging system is compatible with all tape-fed automatic pick and place systems. See Table 2 for details on reeling quantities for commercial chips.

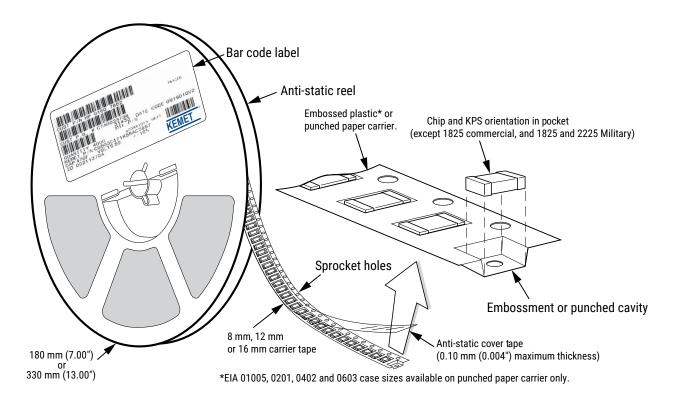


Table 5 - Carrier Tape Configuration, Embossed Plastic & Punched Paper (mm)

	Tape	Embosse	d Plastic	Punche	d Paper	
<b>EIA Case Size</b>	Size	7" Reel	13" Reel	7" Reel	13" Reel	
	(W)*	Pitch	(P <sub>1</sub> )*	Pitch (P <sub>1</sub> )*		
01005 - 0402	8			2	2	
0603	8			2/4	2/4 /	
0805	8	4	4	4	4	
1206 - 1210	8	4	4	4	4	
1805 - 1808	12	4	4			
≥ 1812	12	8	8			
KPS 1210	12	8	8			
KPS 1812 and 2220	16	12	12			
Array 0612	8	4	4			

<sup>\*</sup>Refer to Figures 1 and 2 for W and  $P_1$  carrier tape reference locations.

#### **New 2 mm Pitch Reel Options\***

Packaging Ordering Code (C-Spec)	Packaging Type/Options
C-3190	Automotive grade 7" reel unmarked
C-3191	Automotive grade 13" reel unmarked
C-7081	Commercial grade 7" reel unmarked
C-7082	Commercial grade 13" reel unmarked

<sup>\* 2</sup> mm pitch reel only available for 0603 EIA case size. 2 mm pitch reel for 0805 EIA case size under development.


#### Benefits of Changing from 4 mm to 2 mm Pitching Spacing

- Lower placement costs.
- Double the parts on each reel results in fewer reel changes and increased efficiency.
- Fewer reels result in lower packaging, shipping and storage costs, reducing waste.

<sup>\*</sup>Refer to Tables 6 and 7 for tolerance specifications.



# Figure 1 – Embossed (Plastic) Carrier Tape Dimensions

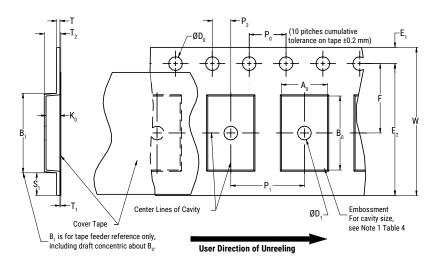

## **Table 6 – Embossed (Plastic) Carrier Tape Dimensions**


Metric will govern

		(	Constant Dime	ensions — Mil	limeters (Incl	hes)			
Tape Size	D <sub>0</sub>	D <sub>1</sub> Minimum Note 1	E <sub>1</sub>	P <sub>0</sub>	P <sub>2</sub>	R Reference Note 2	S <sub>1</sub> Minimum Note 3	T Maximum	T <sub>1</sub> Maximum
8 mm		1.0 (0.039)				25.0 (0.984)			
12 mm	1.5 +0.10/-0.0 (0.059 +0.004/-0.0)	1.5	1.75 ±0.10 (0.069 ±0.004)	4.0 ±0.10 (0.157 ±0.004)	2.0 ±0.05 (0.079 ±0.002)	30	0.600 (0.024)	0.600 (0.024)	0.100 (0.004)
16 mm		(0.059)				(1.181)			
		1	Variable Dime	ensions — Mill	imeters (Inch	nes)			
Tape Size	Pitch	B <sub>1</sub> Maximum Note 4	${\sf E_2^{}}$ Minimum	F	P <sub>1</sub>	T <sub>2</sub> Maximum	W Maximum	A <sub>0</sub> ,B <sub>0</sub>	& K <sub>0</sub>
8 mm	Single (4 mm)	4.35 (0.171)	6.25 (0.246)	3.5 ±0.05 (0.138 ±0.002)	4.0 ±0.10 (0.157 ±0.004)	2.5 (0.098)	8.3 (0.327)		
12 mm	Single (4 mm) and double (8 mm)	8.2 (0.323)	10.25 (0.404)	5.5 ±0.05 (0.217 ±0.002)	8.0 ±0.10 (0.315 ±0.004)	4.6 (0.181)	12.3 (0.484)	Not	e 5
16 mm	Triple (12 mm)	12.1 (0.476)	14.25 (0.561)	7.5 ±0.05 (0.138 ±0.002)	12.0 ±0.10 (0.157 ±0.004)	4.6 (0.181)	16.3 (0.642)		

- 1. The embossment hole location shall be measured from the sprocket hole controlling the location of the embossment. Dimensions of the embossment location and the hole location shall be applied independently of each other.
- 2. The tape with or without components shall pass around R without damage (see Figure 6.)
- 3. If S, < 1.0 mm, there may not be enough area for a cover tape to be properly applied (see EIA Standard 481, paragraph 4.3, section b.)
- 4.  $B_1$  dimension is a reference dimension for tape feeder clearance only.
- 5. The cavity defined by  $A_{n}$ ,  $B_{n}$  and  $K_{n}$  shall surround the component with sufficient clearance that:
  - (a) the component does not protrude above the top surface of the carrier tape.
  - (b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
  - (c) rotation of the component is limited to 20° maximum for 8 and 12 mm tapes and 10° maximum for 16 mm tapes (see Figure 3.)
  - (d) lateral movement of the component is restricted to 0.5 mm maximum for 8 and 12 mm wide tape and to 1.0 mm maximum for 16 mm tape
  - (e) for KPS product,  $A_0$  and  $B_0$  are measured on a plane 0.3 mm above the bottom of the pocket.
  - (f) see addendum in EIA Standard 481 for standards relating to more precise taping requirements.



## Figure 2 - Punched (Paper) Carrier Tape Dimensions

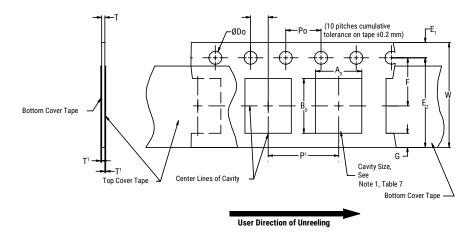

### **Table 7 - Punched (Paper) Carrier Tape Dimensions**

Metric will govern

		Constant D	Dimensions — M	illimeters (Inch	es)		
Tape Size	D <sub>0</sub>	E <sub>1</sub>	P <sub>0</sub>	P <sub>2</sub>	T <sub>1</sub> Maximum	G Minimum	R Reference Note 2
8 mm	1.5 +0.10 -0.0 (0.059 +0.004 -0.0)	1.75 ±0.10 (0.069 ±0.004)	4.0 ±0.10 (0.157 ±0.004)	2.0 ±0.05 (0.079 ±0.002)	0.10 (0.004) maximum	0.75 (0.030)	25 (0.984)
	Variable Dimensions — Millimeters (Inches)						
Tape Size	Pitch	E2 Minimum	F	P <sub>1</sub>	T Maximum	W Maximum	$A_0B_0$
8 mm	Half (2 mm)	6.25	3.5 ±0.05	2.0 ±0.05 (0.079 ±0.002)	1.1	8.3 (0.327)	Note 1
8 mm	Single (4 mm)	(0.246)	(0.138 ±0.002)	4.0 ±0.10 (0.157 ±0.004)	(0.098)	8.3 (0.327)	Note i

- 1. The cavity defined by  $A_{n}$ ,  $B_{n}$  and T shall surround the component with sufficient clearance that:
  - a) the component does not protrude beyond either surface of the carrier tape.
  - b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been
  - c) rotation of the component is limited to 20° maximum (see Figure 3.)
  - d) lateral movement of the component is restricted to 0.5 mm maximum (see Figure 4.)
  - e) see addendum in EIA Standard 481 for standards relating to more precise taping requirements.
- 2. The tape with or without components shall pass around R without damage (see Figure 6.)



## **Packaging Information Performance Notes**

1. Cover Tape Break Force: 1.0 kg minimum.


2. Cover Tape Peel Strength: The total peel strength of the cover tape from the carrier tape shall be:

Tape Width	Peel Strength
8 mm	0.1 to 1.0 newton (10 to 100 gf)
12 and 16 mm	0.1 to 1.3 newton (10 to 130 gf)

The direction of the pull shall be opposite the direction of the carrier tape travel. The pull angle of the carrier tape shall be 165° to 180° from the plane of the carrier tape. During peeling, the carrier and/or cover tape shall be pulled at a velocity of 300 ±10 mm/minute.


3. Labeling: Bar code labeling (standard or custom) shall be on the side of the reel opposite the sprocket holes. Refer to EIA Standards 556 and 624.

### **Figure 3 – Maximum Component Rotation**



#### **Maximum Component Rotation Side View** Maximum Tape Width (mm) Rotation $(\bigcirc_{s}^{\circ})$ 20 8,12 16 - 5610 72 - 2005

## Figure 4 - Maximum Lateral Movement

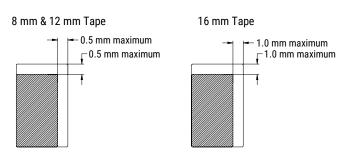

## Figure 5 - Bending Radius







Figure 6 - Reel Dimensions

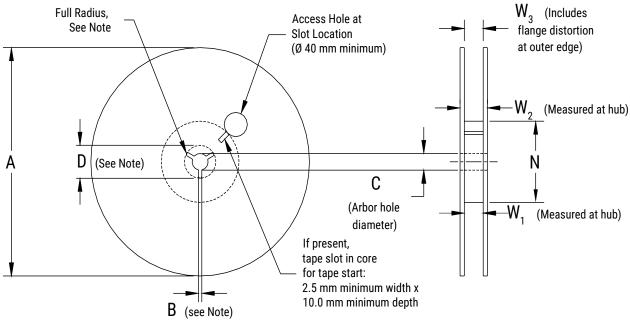

Note: Drive spokes optional; if used, dimensions B and D shall apply.


## **Table 8 - Reel Dimensions**

Metric will govern


Constant Dimensions — Millimeters (Inches)					
Tape Size	A	B Minimum	С	D Minimum	
8 mm	178 ±0.20				
12 mm	(7.008 ±0.008) or	1.5 (0.059)	13.0 +0.5/-0.2 (0.521 +0.02/-0.008)	20.2 (0.795)	
16 mm	330 ±0.20 (13.000 ±0.008)				
Variable Dimensions — Millimeters (Inches)					
Tape Size	N Minimum	W <sub>1</sub>	W <sub>2</sub> Maximum	W <sub>3</sub>	
8 mm		8.4 +1.5/-0.0 (0.331 +0.059/-0.0)	14.4 (0.567)		
12 mm	50 (1.969)	12.4 +2.0/-0.0 (0.488 +0.078/-0.0)	18.4 (0.724)	Shall accommodate tape width without interference	
16 mm		16.4 +2.0/-0.0 (0.646 +0.078/-0.0)	22.4 (0.882)		



## Figure 7 - Tape Leader & Trailer Dimensions

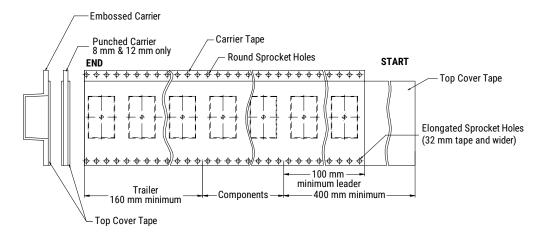

## Figure 8 – Maximum Camber

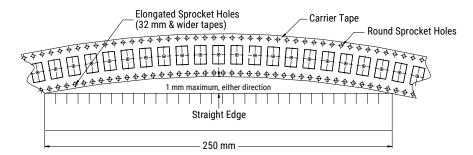



## **KEMET Electronics Corporation Sales Offices**

For a complete list of our global sales offices, please visit www.kemet.com/sales.

#### **Disclaimer**

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicted or that other measures may not be required.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# KEMET:

C0402C103K3RAC7411	C0603C102K5RAC7411	C0603C103K5RAC7411 (	C0603C103M5RAC7411
C0603C104K4RAC7411	C0603C104M4RAC7411 C	0603C104K5RAC7411 C	0805C103K1RACTUAUTO
C0603C102K5RACAUTO	C0603C102K1RACAUTO	C0805C103K2RACAUTO	C0805C224K3RACAUTO
C0805C474K3RACAUTO	C0603C104J5RACAUTO	C0805C103K1RACAU07	C0603C473K5RACAUTO
C1206C103K5RACAUTO	C0603C104K4RACAUTO	C0805C105K4RACAUTO	C0805C223K5RACAUTO
C1206C104K1RACAUTO	C1206C106K4RACAUTO	C1206C106K8RACAUTO	C1206C225K5RACAUTO
C1206C473K2RACAUTO	C1206C474K5RACAUTO	C1210C105K1RACAUTO	C1210C105M5RACAUTO
C1210C224K5RACAUTO	C1210C225K5RACAUTO	C0402C821K3RACAUTO	C0603C102M5RACAUTO
C0603C103M5RACAUTO	C0603C222K5RACAUTO	C0805C105K8RACAUTO	C0805C222K5RACAUTO
C0805C473K5RACAUTO	C0805C102KARACAUTO	C0805C103KARACAUTC	C0805C472KARACAUTO
C0805C223KARACAUTO	C1206C104KARACAUTO	C1206C103KARACAUTO	C1210C104KARACAUTO
C1812C474JARACAUTO	C1812C474KARACAUTO	C1812C104KARACAUTO	C1812C394KARACAUTO
C2225C105KARACAUTO	C0603C103J5RAC7411	C0603C104K3RAC7411 C	0603C222K5RAC7411
C0402C104K4RACAUTO	C1206C105K5RACAUTO	C1210C475K5RACAUTO	C0603C103K5RACAUTO
C0603C104K5RACAUTO	C0805C102K5RACAUTO	C0805C103K5RACAUTO	C0805C104K5RACAUTO
C1206C104K5RACAUTO	C0603C221K1RACAUTO	C0805C334K5RACAUTO	C0805C474K5RACAUTO
C0805C102K2RACAUTO	C1206C224K5RACAUTO	C1206C105K3RACAUTO	C0603C104K3RACAUTO
C0603C472K5RACAUTO	C0603C332K5RACAUTO	C0805C102K1RACAUTO	C1206C225J8RACAUTO
C1206C475J8RACAUTO	C1210C106J4RACAUTO	C1206C225J4RACAUTO	C1206C475J9RACAUTO
C1206C225J9RACAUTO	C1206C475J4RACAUTO	C0805C224K5RACAUTO	C0805C103K1RACAUTO
C1210C106K3RACAUTO	C0805C223K1RACAUTO	C0603C333K5RACAUTO	C0805C224K4RACAUTO
C1210C105K5RACAUTO	C1206C103K2RACAUTO	C0603C471K5RACAUTO	C1206C473K1RACAUTO
C0805C393K1RACAUTO	C1206C225K8RACAUTO	C1206C223K5RACAUTO	C0402C682K5RACAUTO
C0805C222K1RACAUTO	C0402C222K5RACAUTO	C0603C474K8RACAUTO	C0402C103K4RACAUTO
C1206C475K3RACAUTO	C1206C104K2RACAUTO	C0402C153K4RACAUTO	C0603C102K2RACAUTO