
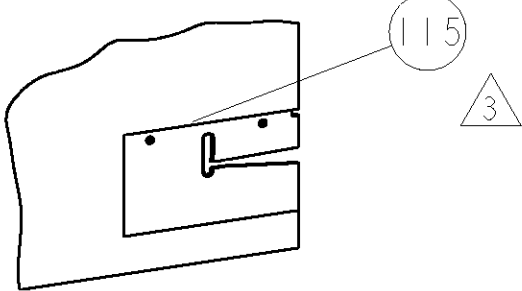
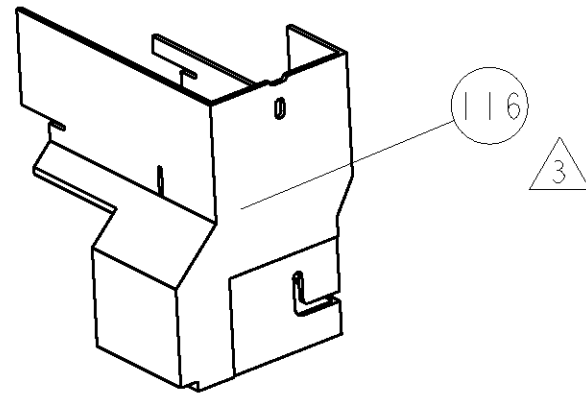
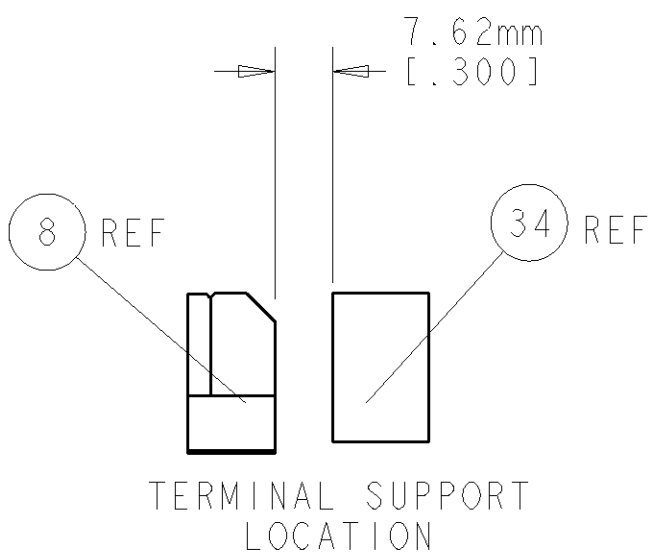
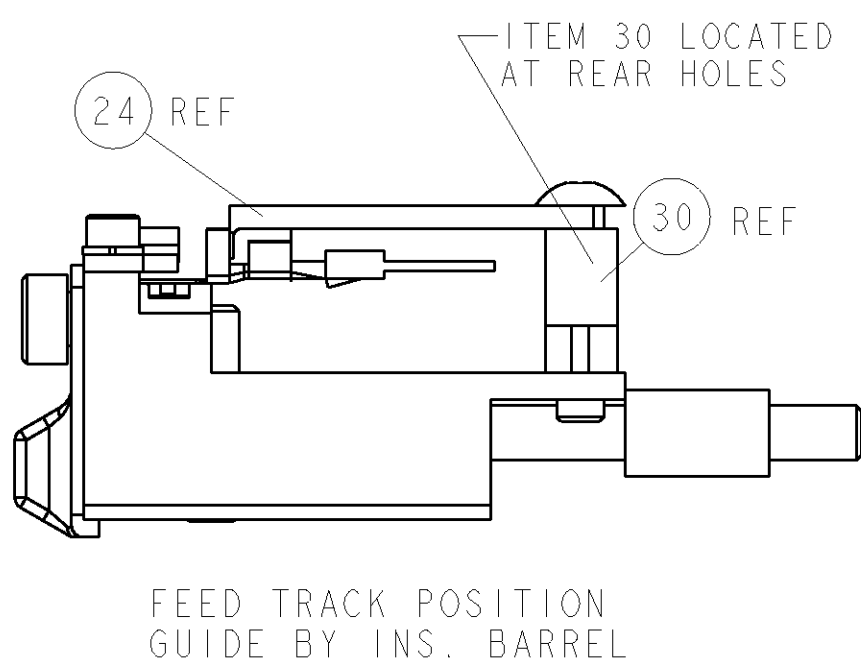


8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				20			
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER	REV	FIRST USED	POWER UNIT		FEED TYPE	DESCRIPTION	
1852788-1	A	122500-1	LEADMAKER		POST FEED	CUTS CARRIER	
1852788-2	A	565435-5	BENCH MODEL K		PRE FEED	CUTS CARRIER	
1852788-3	A	354500-1	BENCH MODEL G		PRE FEED	CUTS CARRIER	
1852788-6	A	122500-1	LEADMAKER		POST FEED	CONTINUOUS CARRIER	
7-1852788-7	A	-	-		-	SPARE PARTS	



- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

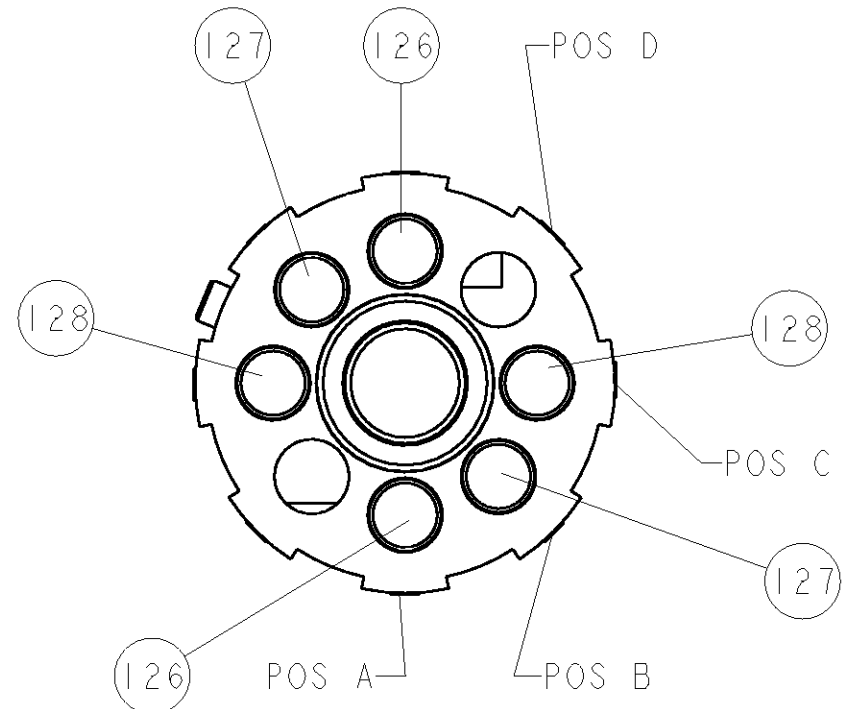

AMP-O-LECTRIC TERM GUARD

G TERMINATOR GUARD

TERMINAL NAME: 1.5 SYSTEM CONN.			
TE PN	YAZAKI	YAZAKI TERMINAL-YAZAKI CRIMP SPECS	
1572461-1	7114-4104-02		
-	-	PAD LTR	CRIMP HEIGHT
-	-	A	1.40mm+0.05/-0.05[.055+0.002/-0.002]
-	-	B	1.35mm+0.05/-0.05[.053+0.002/-0.002]
-	-	C	1.30mm+0.05/-0.05[.051+0.002/-0.002]
-	-	D	-
-	-	CRIMP	SIZE
-	-	WIRE	2.21mm [.087]
-	-	INSUL	2.54mm [.100]
WIRE STRIP LENGTH 5.00-5.51	TERM APPL SPEC WA1863	FEED 10.90	APPLICATOR INSTRUCTIONS 408-8040
		SET UP GAGE 458637-1	

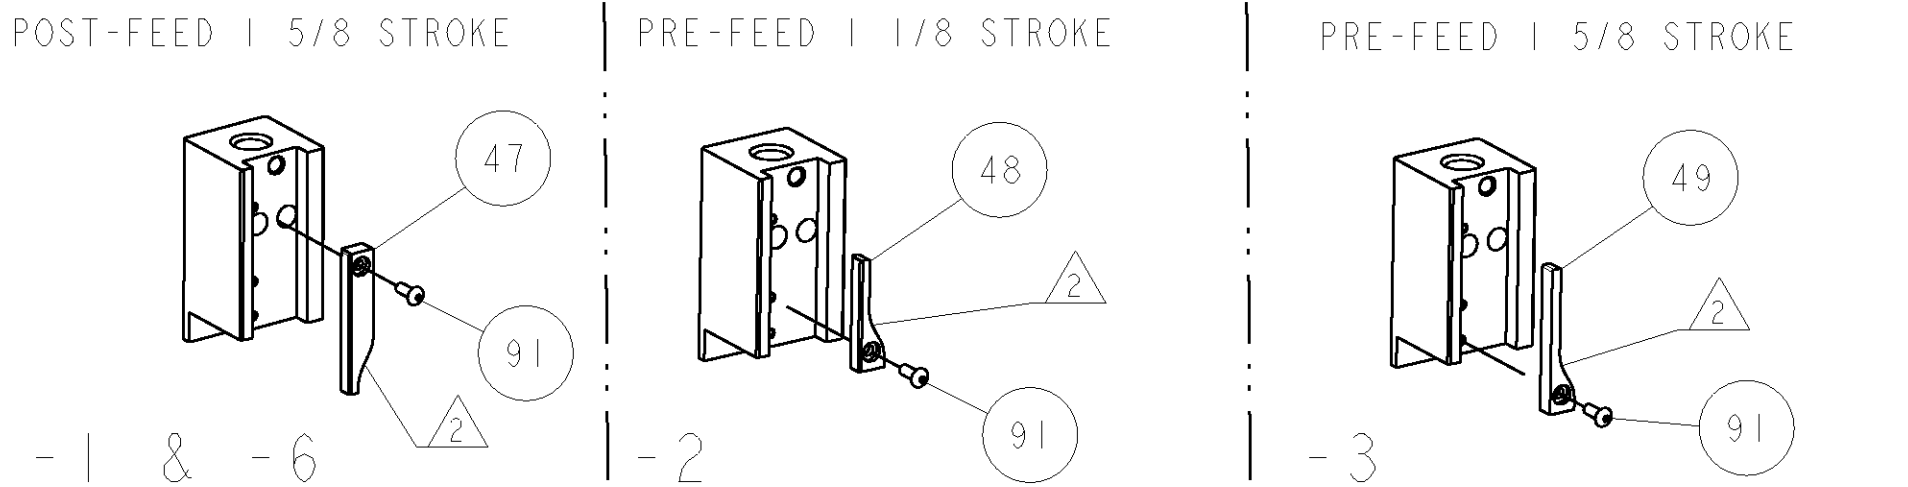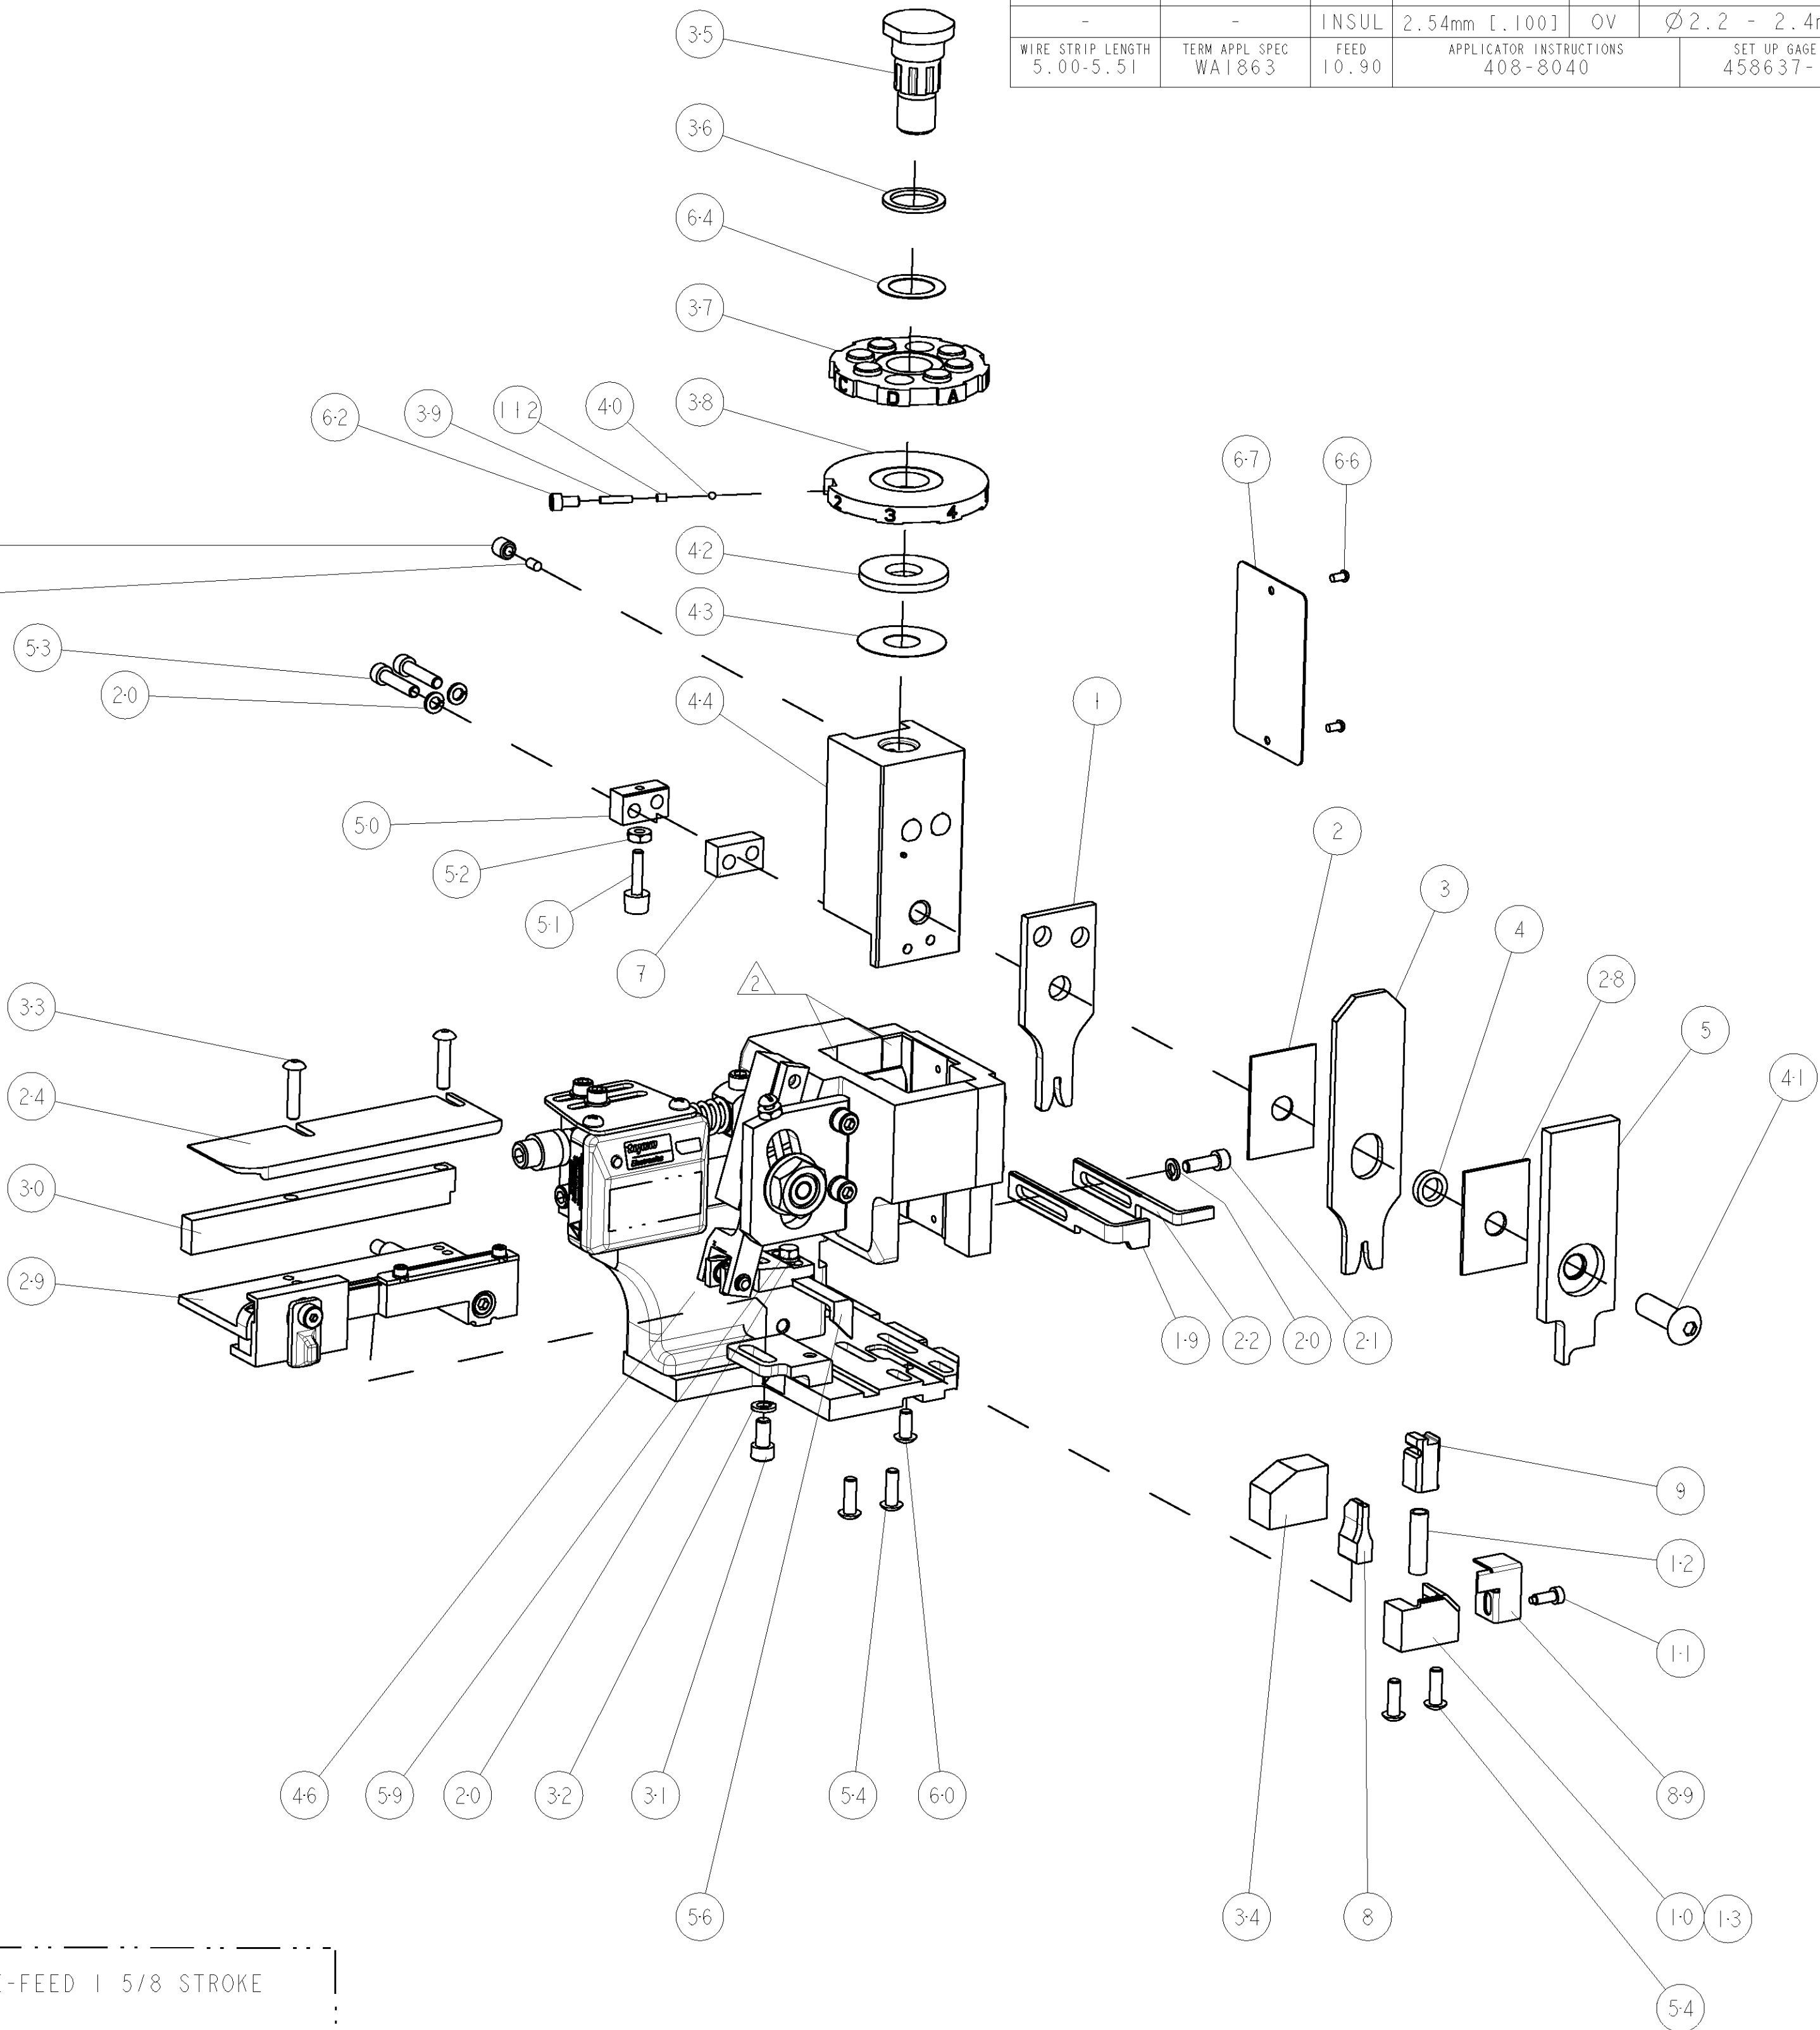

LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
A	66		A	RELEASED	12DEC2008	LG	TE	
	</							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852788-3](#)