

"High Frequency Ceramic Solutions"

2450 MHz Band Pass Filter

P/N 2450BP07B0100

Detail Specification: 10/27/10

Page 1 of 2


General Specifications

Part Number	2450BP07B0100
Frequency (MHz)	2400 ~ 2500
Insertion Loss	3.8 dB max.
Return Loss	9.5 dB min.
Attenuation (min.)	25 dB @ 695 ~ 800MHz
Attenuation (min.)	22 dB @ 1910 MHz
Attenuation (min.)	30 dB @ 3200 MHz
Attenuation (min.)	20 dB @ 4800 ~ 5000 MHz
Attenuation (min.)	20 dB @ 7200 ~ 7500MHz

Impedance	50 Ω
Input Power	2W max.
Operating Temperature	-40 to +85°C
Storage Temperature Range	+5 ~ +35 °C, Humidity 45~75%RH, 12 mos. max
Reel Quantity	10,000


P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2450BP07B0100S
		T & R	Suffix = T	Eg. 2450BP07B0100T
	Termination Style	100% Tin	Suffix = None	Eg. 2450BP07B0100(S or T)
		Tin / Lead	Suffix = /Pb	Eg. 2450BP07B0100(S or T)00P

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN



Mechanical Dimensions


	In	mm
L	0.039 $\pm$ 0.002	1.00 $\pm$ 0.05
W	0.020 $\pm$ 0.002	0.50 $\pm$ 0.05
T	0.015 $\pm$ 0.002	0.38 $\pm$ 0.05
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
c	0.004 $\pm$ 0.002	0.10 $\pm$ 0.05
d	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10

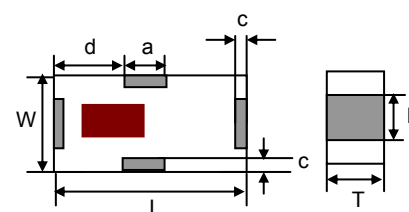

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

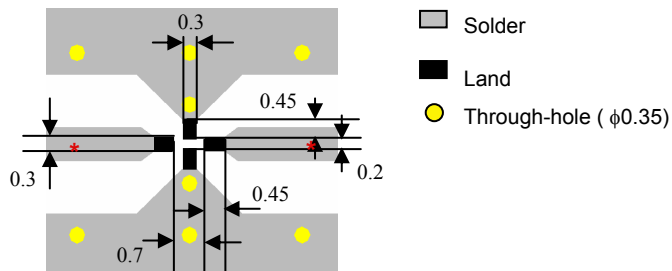

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2010 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


2450 MHz Band Pass Filter

P/N 2450BP07B0100

Detail Specification: 10/27/10

Page 2 of 2

Typical Electrical Performance (T=25°C)

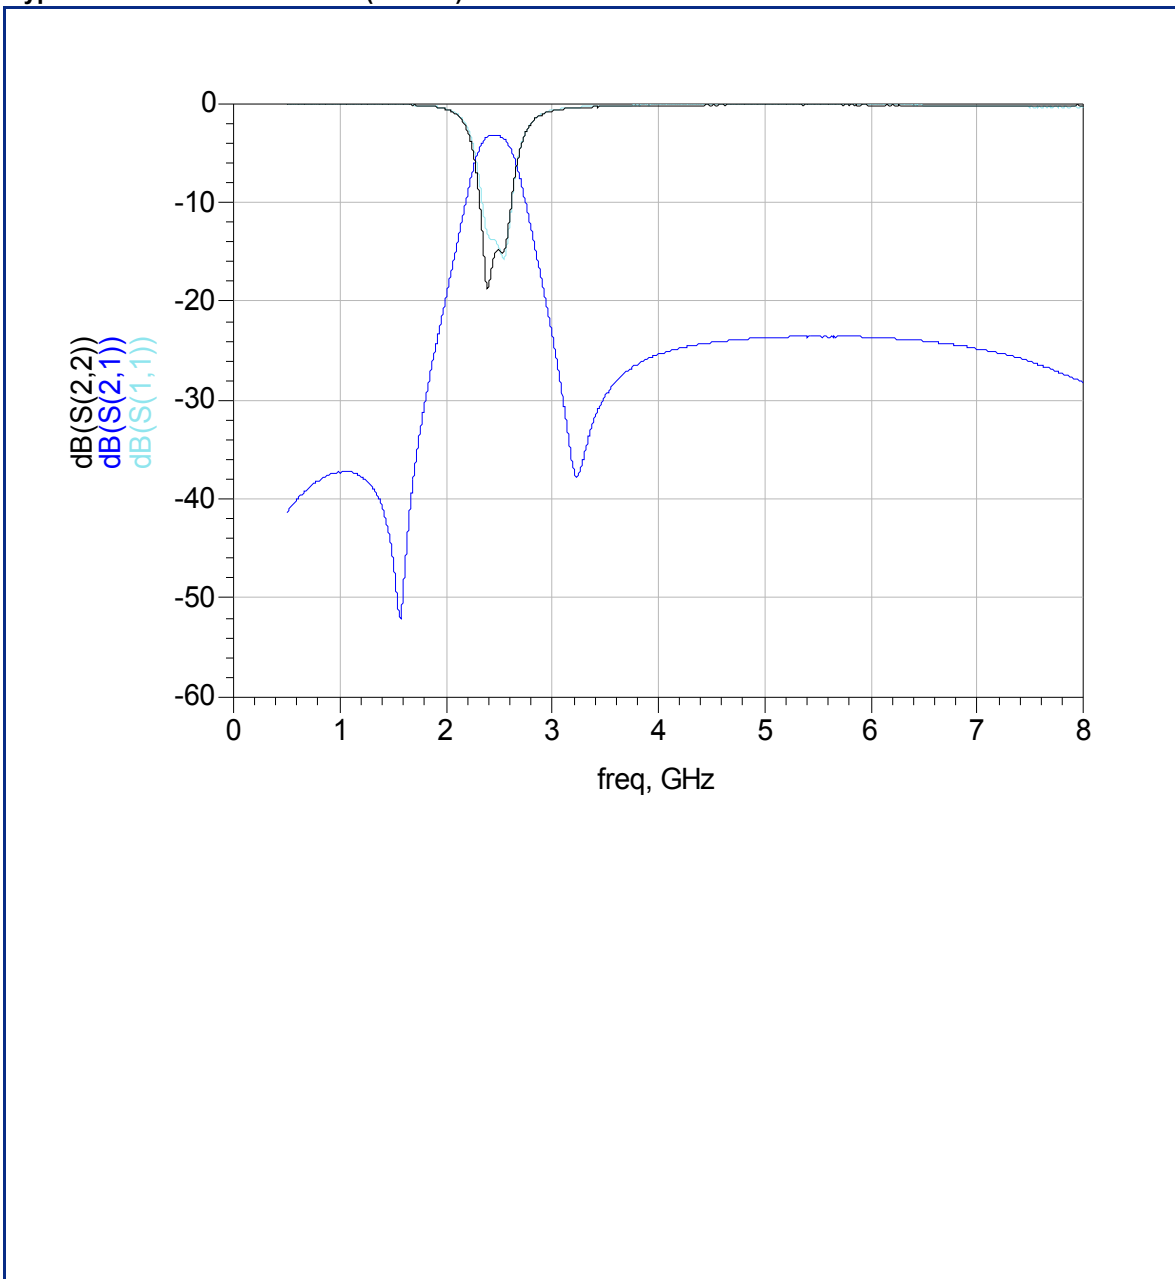

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2010 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

[2450BP07B0100T](#)