

Piano DIP Switch

A6HR

Piano type models available in Half-pitch.

- Gold-plated twin contacts will ensure high reliability.
- Embossed taping models available for automatic mounting. (small reel also available)
- Temperature-resistant resin allows at peak reflow temperatures of 260 °C.

RoHS Compliant



■ List of Models


Type and color of actuator	Standard (white)					
	Tubo pookaging		Embossed taping			
	Tube packaging		Standard reel		Small reel	
	Quantity		Quantity	High	Quantity	
No. of poles	per tube		per reel		per reel	
2	125	A6HR-2104		A6HR-2104-P		A6HR-2104-PM
4	70	A6HR-4104]	A6HR-4104-P]	A6HR-4104-PM
6	50	A6HR-6104	1,000	A6HR-6104-P	500	A6HR-6104-PM
8	40	A6HR-8104		A6HR-8104-P		A6HR-8104-PM
10	30	A6HR-0104		A6HR-0104-P		A6HR-0104-PM

Note: Order in multiples of the package quantity.

■ Ratings/Characteristics

Rating (resistive load)		25 mA at 24 VDC 10 μA (minimum current) at 3.5 VDC				
Ambient operating temperature		-30 to +85 °C at 60% max. (with no icing or condensation)				
Ambient operating humidity		35% to 95% (at +5 to +35 °C)				
Insulation resistance		100 MΩ min. (at 100 VDC with insulation tester)				
Contact resistance (initial value)		200 m $Ω$ max.				
Dielectric strength	Between terminals	300 VAC for 1 min				
Vibration resistance	Malfunction	10 to 55 Hz, 1.5-mm double amplitude				
Shock resistance	Malfunction	490 m/s ² min.				
Durability	Electrical	1,000 operations min.				
Washing		Not possible				
Degree of protection		IEC IP40				
Operating force (OFF to ON)		0.29 to 4.9 N {30 to 500 gf} (2.45N {250 gf} max. ON to OFF)				
Weight		0.13g (2 poles) 0.22g (4 poles) 0.3g (6 poles) 0.4g (8 poles) 0.48g (10 poles)				

■ **Dimensions** (Unit: mm)

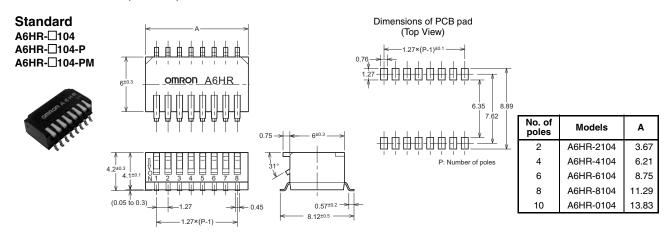

Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Internal Connections

Contact Form (Top View)



■ Precautions

Be sure to read the Safety precautions common to all DIP Switches for correct use.

Contact: www.omron.com/ecb

Note: Do not use this document to operate the Unit.

Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

<u>A6HR-0104</u> <u>A6HR-0104-P</u> <u>A6HR-0104-PM</u> <u>A6HR-2104</u> <u>A6HR-2104-P</u> <u>A6HR-2104-PM</u> <u>A6HR-2104-PM</u> <u>A6HR-4104-PM</u> <u>A6HR-4104-PM</u> <u>A6HR-4104-PM</u> <u>A6HR-8104-PM</u> <u>A6HR-4104-PM</u> <u>A6HR-6104-PM</u> <u>A6HR-8104-PM</u> <u>A6HR-4104-PM</u> <u>A6HR-8104-PM</u> <u>A6HR-8104-PM</u>