






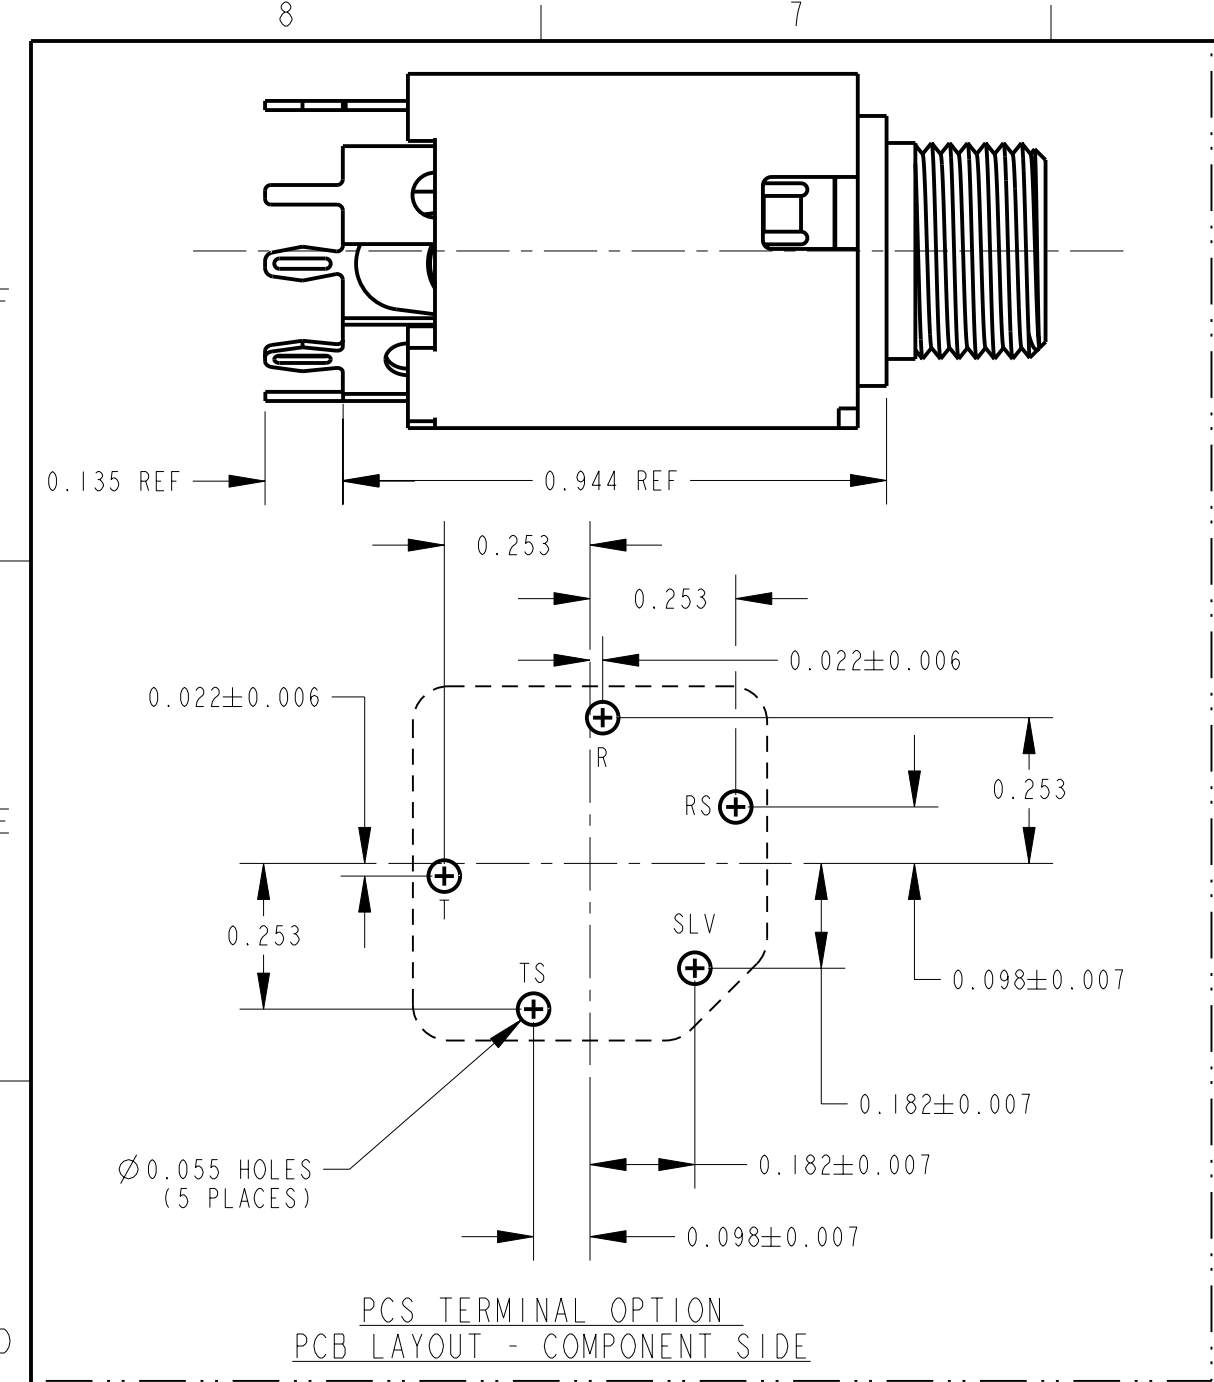


TERMINAL FINISH OPTIONS:
BLANK - (STD) ELECTRO-TIN PLATED
M - GOLD PLATED SPRINGS
WITH GOLD CONTACTS
ON RING SPRINGS AND
SHUNT SPRINGS (WHEN
SHUNTS ARE USED)

TERMINAL OPTIONS:
BLANK - SOLDER TERMINAL
PC - 0.078 WIDE PC TAILS
PCS - SNAP-IN PC TAILS

CIRCUITRY OPTIONS:

1 - TIP OPEN CIRCUIT	
2A - TIP CLOSED CIRCUIT	
2B - TIP & RING OPEN CIRCUIT	
3 - TIP OPEN CIRCUIT AND ISOLATE "MAKE" CIRCUIT	
3B - TIP CLOSED CIRCUIT AND RING OPEN CIRCUIT (I-C TRANSFER)	
3D - 1 TIP CLOSED CIRCUIT AND 1 TIP OPEN CIRCUIT	
3E - TIP OPEN CIRCUIT AND ISOLATED "BREAK" CIRCUIT	
3F - TIP OPEN CIRCUIT AND RING CLOSED CIRCUIT	
4B - TIP & RING CLOSED CIRCUIT	

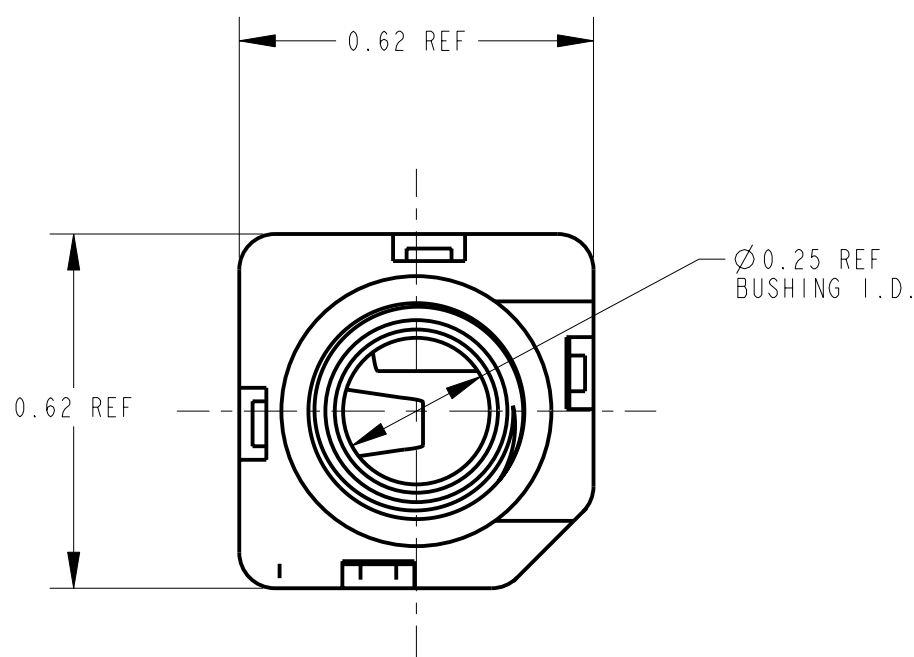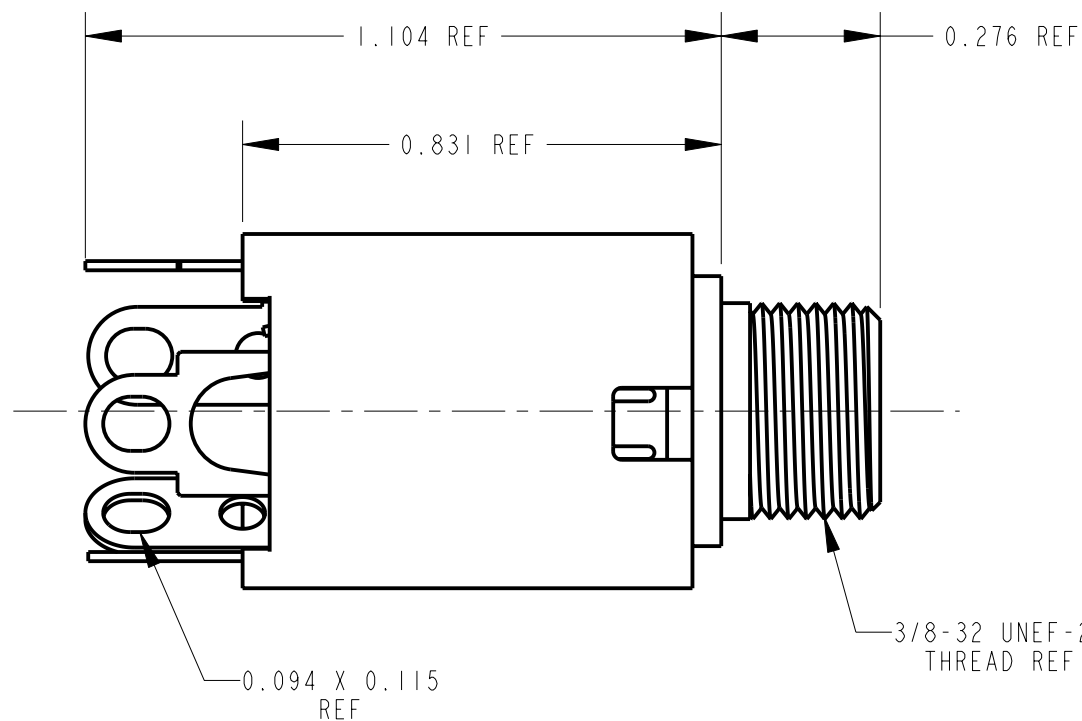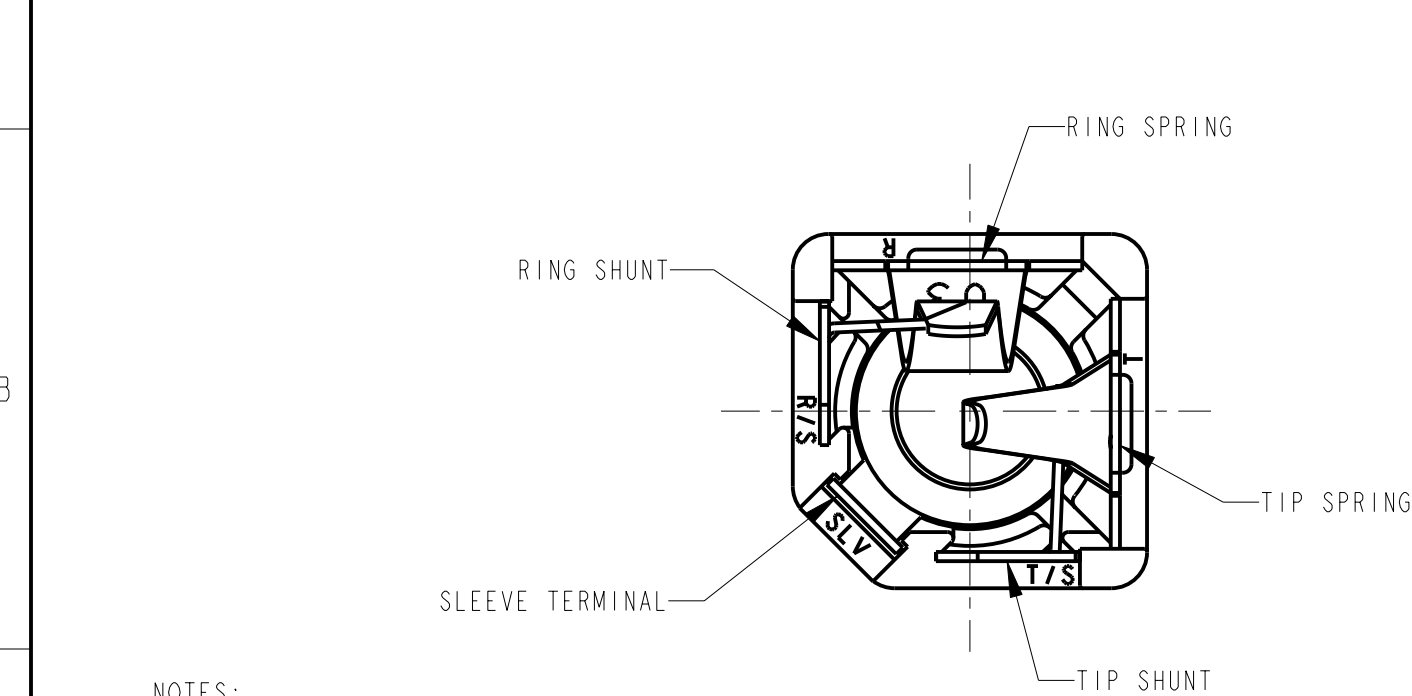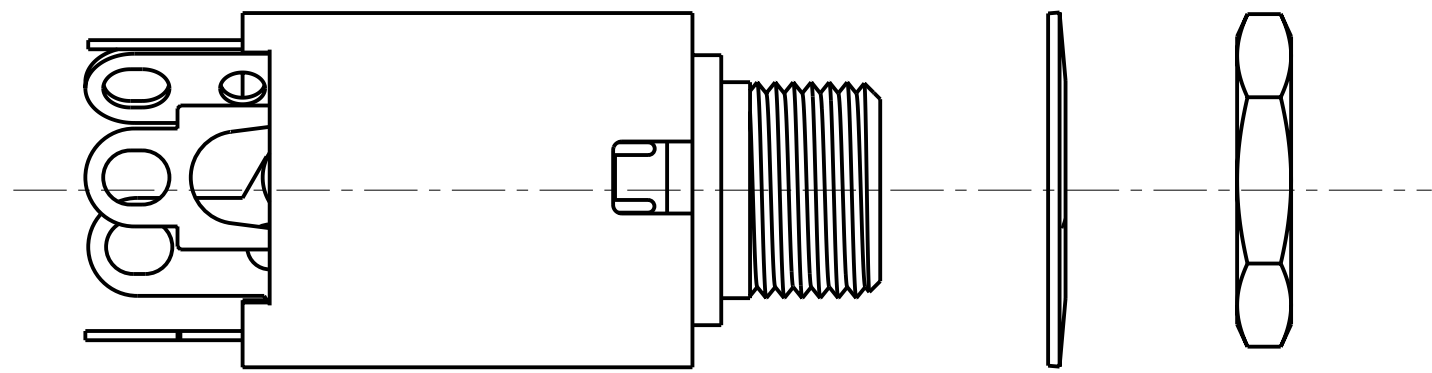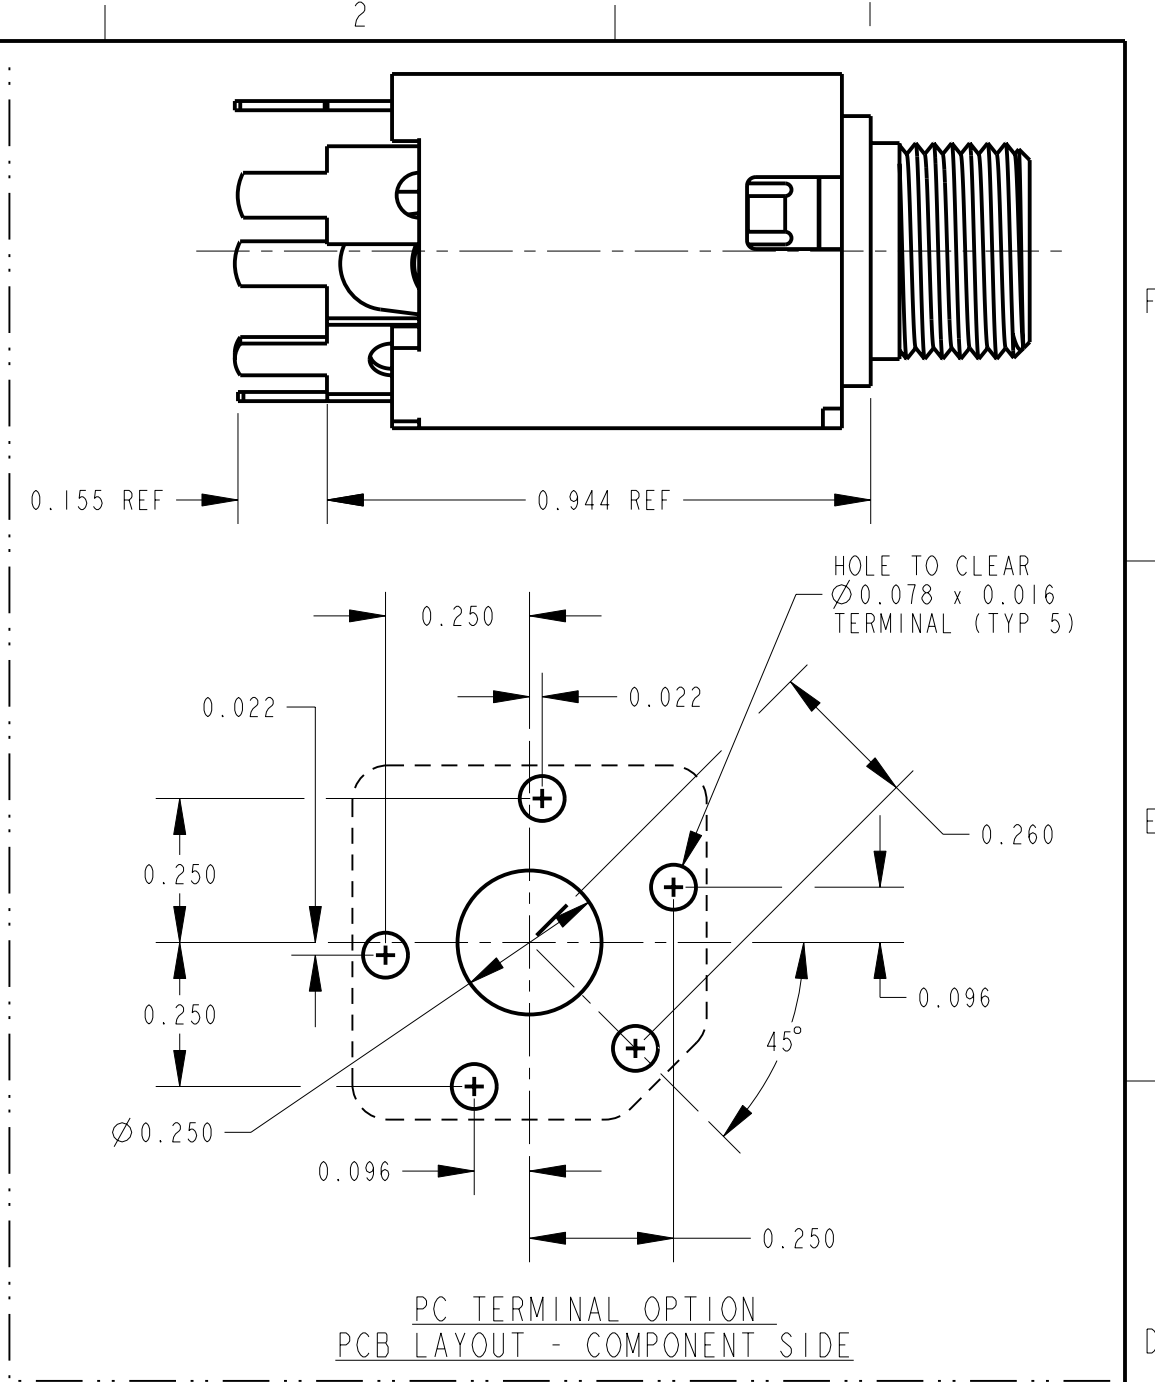

NOTES:

- HARDWARE SHIPPED UNASSEMBLED.
- MAXIMUM PANEL THICKNESS: 0.156
- MATERIALS:
HOUSING - POLYESTER GLASS FILLED, BLACK
BUSHING - BRASS, NICKEL PLATED
SLEEVE TERMINAL - BRASS, LEAD FREE ELECTRO-TIN PLATED
SPRINGS - NICKEL SILVER, LEAD FREE ELECTRO-TIN PLATED
LIFTERS - NYLON (113 & 113E CIRCUIT OPTIONS)
WASHER - STEEL, NICKEL PLATED
NUT - BRASS, NICKEL PLATED
- THIS PRODUCT IS RoHS COMPLIANT.

SOLDER TERMINAL OPTION

REV	ECO NUMBER	DATE	BY	APVD
A	26032	3-25-11	TJK	MW
REVISIONS				

★ STAR SYMBOL DENOTES CRITICAL DIMENSION				
UNLESS OTHERWISE SPECIFIED				
1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.01 - THREE PLACE DECIMALS ±0.005 - ANGLES ±1° - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.				
2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002				
3. REMOVE ALL BURRS				
DO NOT SCALE DRAWING				

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
SIZE	WIDTH	MULT	LBS/M	TEMPER
FINISH SPEC No.		MATERIAL SPEC No.		
FIRST USED ON		SCALE 3:1		
DATE DRAWN	BY	CHKD	APVD	
4-18-06	TJK	4-18-06	MW	
NAME #3/8-32 THREADED BUSHING		PART No. 110X SERIES		
Ø0.25 I.D., HI-D JACK ASSY, RoHS		M110X SERIES		
		REV A		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft:

[N113E](#) [111PCX](#) [111X](#) [112APCX](#) [112AX](#) [112BPCX](#) [112BX](#) [113BPCX](#) [113BX](#) [113DX](#) [113EPCX](#) [113EX](#) [113FX](#)
[113X](#) [114BPCX](#) [114BX](#) [L112BX](#) [L114BX](#) [M112BPCX](#) [M114BX](#) [N112BPCX](#) [N113BX](#) [N113X](#) [N114BPCX](#)
[NL112BX](#) [NL113BX](#) [NL114BX](#) [NL114BPC](#) [N113BPCSX](#) [N114BX](#) [N112BX](#) [NL-112AX](#) [M114BPCX](#) [112APCS](#)
[112BPCS](#) [N113EX](#) [NL114BPCS](#) [111PCS](#) [N112BPCS](#) [112APCSX](#) [113BPCS](#) [113EPCS](#) [114BPCSX](#) [N114BPCSX](#)
[M11782](#) [M1437](#)