# Available at Digi-Key\* www.digikey.com





# Improved Performance 5x7mm TB / TVB Model Series

# TCXO / VCTCXO



2111 Comprehensive Drive Aurora, Illinois 60505 Phone: 630-851-4722 Fax: 630-851-5040

www.conwin.com

# **Description:**

Connor-Winfield's TBxxx and TVBxxx series are 5x7mm TCXO and VCTCXO products with exceptional frequency stability and low phase noise.



Similar to our Txxx

/ TVxxx series, these devices are quieter, smoother over temperature and are available at higher frequencies.

Using the latest analog TCXO technology, the TBxxx and TVBxxx series have improved phase noise and frequency stability performance and are available in 4-pad or 10-pad surface mount footprints.

These products are designed for such applications as IEEE 1588 PTP and Synchronous Ethernet.

#### Features:

- Frequency Stabilities Available: +/-0.28 ppm (10 to 50 MHz) +/-0.50 ppm, +/-1.00 ppm or +/-2.00 ppm (10 to 100 MHz)
- Temperature Ranges Available:
   0 to 85°C, 0 to 70°C, -40 to 85°C or -20 to 70°C
- Packages Available:

TB - Series: 5 x 7mm - 10 Pad TVB - Series: 5 x 7mm - 4 Pad

- 3.3 Vdc Operation
- Output Logic: LVCMOS or Clipped Sinewave
- Fixed Frequency TCXO
- Voltage Controlled VCTCXO
- Low Jitter < 0.50 ps RMS</li>
- Low Phase Noise
- Tri-State Enable/Disable: (TB Model Series Only)

- 010.0M

Output Frequency

Frequency Format -xxx.xM Min\*

-xxx.xxxxxxM Max\*

\*Minimum of 1 digit after the decimal point, and

Maximum of 6

- Tape and Reel Packaging
- RoHS Compliant / Lead Free 
   √RoHS


## **Applications:**

- IEEE 1588 Applications
- Synchronous Ethernet slave clocks, ITU-T G.8262 EEC options 1 & 2
- Compliant to Stratum 3, GR-1244-CORE & GR-253-CORE
- Wireless Communications
- Small Cells
- Test and Measurement
- GPS Applications

## Standard Frequencies Available \*

\* 10, 12.8, 19.2, 19.44, 20, 25, 40, 50, 52, 54, 80 and 100 MHz Available frequencies from the factory for small quantity orders or quick delivery. Additional frequencies are available.

\*\* Not all options available at Digi-Key

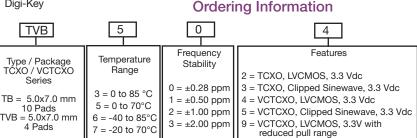

Example: Part Number

TVB504-010.0M = 5x7mm 4 pad package,  $\pm 0.28$  ppm, 0 to 70 °C, 3.3 Vdc, LVCMOS Output, VCTCXO TB715-012.8M = 5x7mm 10 pad package,  $\pm 0.50$  ppm, -20 to 70 °C, 3.3 Vdc, Clipped Sinewave Output, VCTCXO TB522-050.0M = 5x7mm 10 pad package,  $\pm 1.0$  ppm, 0 to 70 °C, 3.3 Vdc, LVCMOS Output, TCXO TVB602-010.0M = 5x7mm 4 pad package,  $\pm 0.28$  ppm, -40 to 85 °C, 3.3 Vdc, LVCMOS Output, TCXO



Date 0	7 Aug 2018
Revision	10
Page	1 of 6
Bulletin	Tx380



Aurora, Illinois 60505 Phone: 630-851-4722

Fax: 630-851-5040 www.conwin.com

	Absolute Maxi	mum Ratings			
Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-55	-	95	°C	110103
Supply Voltage (Vcc)	-0.5	_	6.0	Vdc	
Input Voltage	-0.5	-	Vcc + 0.5	Vdc	
	On anoting Co	a cifications			
	Operating Sp				
Parameter	Minimum	Nominal	Maximum	Units	Notes
Output Frequency (Fo)	40		50		
Models TBx0x, TVBx0x	10	-	50	MHz	
Models TBx1x, TVBx1x	10 10	-	100	MHz MHz	
Models TBx2x, TVBx2x Models TBx3x, TVBx3x	10	-	100 100	MHz	
Operating Temperature Range		oring Information	for full part number		
Models TB3xx, TVB3xx	(See Ord	ening initormation	85	°C	
Models TB5xx, TVB5xx	0	-	70	°C	
Models TB6xx, TVB6xx	-40	_	85	°C	
Models TB7xx, TVB7xx	-20	<u>-</u>	70	°C	
Frequency Calibration @ 25 °C	-1.0	_	1.0	ppm	1
Frequency Stability (See Ordering Informat		Per STRATUM 3		ррпп	·
Frequency Stability ±0.28 ppm is only as					
Models TBx0x, TVBx0x	-0.28	y range or to to o	0.28	ppm	2
Holdover Stability	-0.32	_	0.32	ppm	3
Constant Temperature Stability	-40	_	40	ppb	Over 24 Hrs.
Frequency Stability		ering Information	for full part number		0 101 24 1113
Models TBx1x, TVBx1x	-0.50	-	0.50	ppm	2
Models TBx2x, TVBx2x	-1.00	_	1.00	ppm	2
Models TBx3x, TVBx3x  Models TBx3x, TVBx3x	-2.00	_	2.00	ppm	2
Frequency vs. Load Stability	-0.05	_	0.05	ppm	±5%
Frequency vs. Voltage Stability	-0.05	_	0.05	ppm	±5%
Static Temperature Hysteresis	-	_	0.40	ppm	4
Freq. shift after reflow soldering	-1.0	_	1.0	ppm	5
Long Term Stability	-1.0	_	1.0	ppm	6
Aging	1.0		1.0	ррт	
per Life (20 Years)	-3.0	_	3.0	ppm	
per Day	-40	_	40	ppb	
Total Frequency Tolerance	-4.6	_	4.6	ppm	7
Supply Voltage (Vcc)	3.135	3.30	3.465	Vdc	
Supply Current (Icc)	0.100	0.00	0.100	• • • • • • • • • • • • • • • • • • • •	
LVCMOS (10 to 52 MHz)	_	2.1	6.0	mA	
LVCMOS (>52 to 100 MHz)	_	-	12	mA	
Clipped Sine (10 to 52 MHz)	_	1.3	2.9	mA	
Clipped Sine (>52 to 100 MHz)	_	-	12	mA	
Jitter:			·-		
Period Jitter	-	3.0	5.0	ps RMS	
Integrated Phase Jitter (12K to Fo/2)	-	0.3	1.0	ps RMS	8
Allan Deviation (1s) Fo=10.0 MHz	-	1.0E-10	-		-
Typical SSB Phase Noise		<u> </u>			
For Fo	10.0 MHz	50.0 MHz	100.0 MHz		
@ 10 Hz offset	-98	-70	-60	dBc/Hz	
@ 100 Hz offset	-125	-100	-91	dBc/Hz	
@ 1 KHz offset	-143	-122	-119	dBc/Hz	
@ 10 KHz offset	-151	-145	-142	dBc/Hz	
@ 100 KHz offset	-152	-150	-153	dBc/Hz	
@ 1 MHz offset	-155	-152	-153	dBc/Hz	
Start-Up Time	-	-	10	ms	

Bulletin	Tx380
Page	2 of 6
Revision	10
Date	07 Aug 2018

Bulletin



Aurora, Illinois 60505 Phone: 630-851-4722

Fax: 630-851-5040 www.conwin.com

Control Voltage Input Characteristics

ParameterMinimum	Minimum	Nominal	Maximum	Units	Notes
Control Voltage	0.3	1.65	3.0	V	
Frequency Pullability					
Pull Range Options 4 and 5:	±10	±12	-	ppm	
Pull Range Option 9:	±5	±6	±8	ppm	
Pull Slope (Vc=1.65V)					
Pull Range Options 4 and 5:	-	8.00	-	ppm/V	
Pull Range Option 9:	-	4.50	-	ppm/V	
Control Voltage Slope		Positive Slope			
Monotonic Linearity	-	-	5	%	
Input Impedance	100K	-	=	Ohm	
Modulation Bandwidth (3dB)	10	-	=	KHz	

#### OE Enable /Disable Input Characteristics (Pad 8) TB Series only

Enable Voltage (High) 70%Vcc	Parameter	Minimum	Nominal	Maximum	Units	Notes
Disable Voltage (Levy)	nable Voltage (High)	/11%//00	-	-	Vdc	9
Disable voltage (Low) 30% VCC	Disable Voltage (Low)	-	-	30%Vcc	Vdc	9

Function Output Disabled (High Impedance) Low:

High or Open: Enabled

### LVCMOS Output Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Load (CL)	-	15	-	рF	10
Voltage (High) (Voh)	90%Vcc	-	-	Vdc	
(Low) (Vol)	-	-	10%Vcc	Vdc	
Current (High) (Ioh)	-4	-	-	mA	
(Low) (IoI)	-	-	4	mA	
Duty Cycle at 50% of Vcc	45	50	55	%	
Rise / Fall Time 10% to 90%	-	4	8	ns	

# **Clipped Sinewave Output Characteristics**

Parameter	Minimum	Nominal	Maximum	Units	Notes
Load (RC)					11
Output Load Resistance	-	10K	-	Ohm	12
Output Load Capacitance	-	10	-	рF	
OutputVoltage(< 40 MHz)	1.0	1.2	-	V	pk-pk
OutputVoltage(=>40 MHz)	0.8	1.0	-	V	pk-pk
Output Impedance	-	200	-	Ohms	• •

#### **Package Characteristics**

Package Hermetically sealed ceramic package with grounded metal cover

#### **Environmental Characteristics**

Vibration per Mil Std 883E Method 2007.3 Test Condition A. Vibration: Mechanical Shock per Mil Std 883E Method 2002.4 Test Condition B. Shock: Soldering Process: RoHS compliant lead free. See soldering profile on page 6.

- 1. Initial calibration @ 25°C. ±2°C, for VCTCXO's Vc = 1.65V. Specifications at time of shipment
- 2. Frequency stability vs. change in temperature. [±(Fmax-Fmin)/(2\*Fo]). For VCTCXO, Vc = 1.65Vdc
- 3. Inclusive of frequency stability, supply voltage change (±1%), aging, for 24 hours. Per STRATUM 3 GR-1244-CORE.
- 4. Frequency change after reciprocal temperature ramped over the operating range. Frequency measured before and after at 25°C
- 5. Two consecutive solder reflows after 1 hour recovery @ 25°C.
- 6. Frequency drift over 1 year @ 25°C.
- 7. Inclusive of calibration @ 25°C, frequency vs. change in temperature, change in supply voltage (±5%), load change (±5%), reflow soldering process and 20 years aging.


  8. For Fo<40MHz, BW=12kHz to Fo/2, for Fo>40MHz, BW=12kHz to 20MHz
- 9. Ouput is active with Pad 8 not connected. Leave Pad 8 open if disable function is not required. When disabled, output stage is off but oscillator and compensation circuits are still powered (current consumption <2 mA)
- 10. Attention: To achieve optimal frequency stability, and in some cases to meet the specification stated on this data sheet, it is required that the circuit connected to this TCXO output must have the equivalent input capacitance that is specified by the nominal load capacitance. Deviations from the nominal load capacitance will have a graduated effect on the stability of approximately 20 ppb per pF load difference.
- 11. Load components are required for proper operation of the device.
- 12. Output is AC coupled.

Date	07 Aug 2018
Revision	10
Page	3 of 6
Bulletin	Tx380


Aurora, Illinois 60505 Phone: 630-851-4722

Fax: 630-851-5040

# TB Series Package Outline

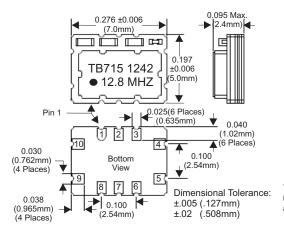

# TB Series Suggested Pad Layout




\* Do not route any traces in the keep out area. It is recommended the next layer under the keep out area is to be ground plane.


# TB Series Pad Connections

1:	Do Not Connect
2:	Do Not Connect
_3:	Do Not Connect
4:	Ground
_5:	Output
_6:_	Do Not Connect
_7:	Do Not Connect
_8:	Enable / Disable (OE)
_9:	Supply Voltage (Vcc
10:	VCTCXO: Control Voltage (Vc)
	TCXO: N/C

# TVB Series Package Outline

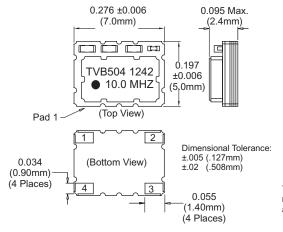

# TVB Series Suggested Pad Layout




\* Do not route any traces in the keep out area. It is recommended the next layer under the keep out area is to be ground plane.


# TVB Series Pad Connections


1: VCTCXO: Voltage Control (Vc)
TCXO: N/C
2: Ground
3: Output
4: Supply (Vcc)

## **Marking Information**

The following are examples of possible marking configurations







	2 CHARAC	TER DATE CODE
_	Y = Year	M = Month
}	8 = 2018 9 = 2019 0 = 2020 1 = 2021	A = January B = February C = March D = April E = May F = June G = July H = August J = September K = October M = November N = December

Date	07 Aug 2018
Revision	10
Page	4 of 6
Bulletin	Tx380

Aurora, Illinois 60505


Phone: 630-851-4722 Fax: 630-851-5040

www.conwin.com

# **TB Series Design Recommendations**

# Vcc, should have a large capper are for reduced connect at 0.010°(0.254mm) Recommended clearance in functionate of the pad. Top View a large capper from the pad. Top View a large capper are for reduced inductance. Top LAYER GROUND LAYER GROUND LAYER GROUND LAYER GROUND LAYER GROUND LAYER GROUND LAYER

# **TVB Series Design Recommendations**

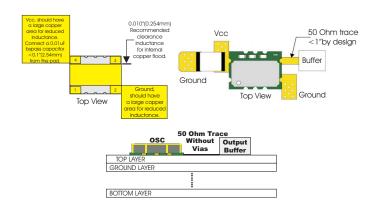



# TB Series LVCMOS Test Circuit

BOTTOM LAYER

# TVB Series LVCMOS Test Circuit

# **LVCMOS Output Waveform**

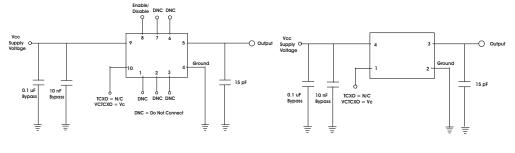





# TB Series Clipped Sinewave Test Circuit

TVB Series Clipped Sinewave Test Circuit

Clipped Sinewave Output Waveform

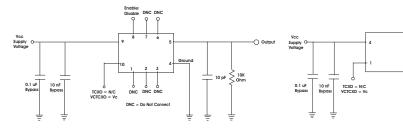



Note: The clipped sinewave output is AC coupled


Bulletin	Tx380
Page	5 of 6
Revision	10
Date	07 Aug 2018

CONNOR WINFIELD

Aurora, Illinois 60505 Phone: 630-851-4722


Fax: 630-851-5040 www.conwin.com


# Typical Phase Noise Fo=10MHz

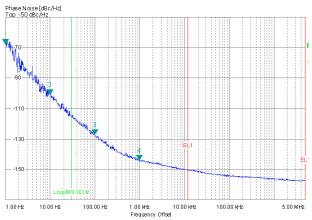


**MTIE** 

### TIE

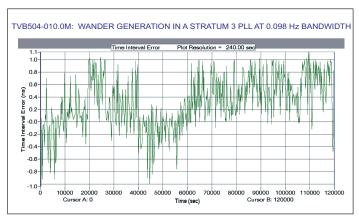

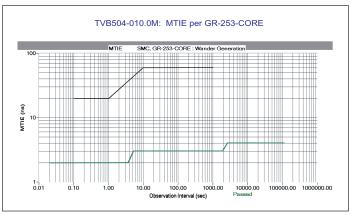


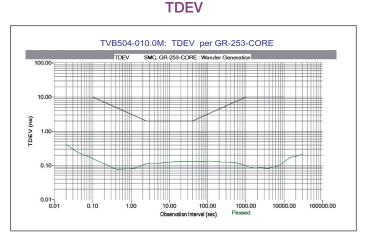

# 5x7mm Tape and Reel Information MEETS EIA-481A AND EIAJ-1009B 700 PCS/REEL MAXIMUM.

# | 0.020 R. | 0.063 (1.6mm) DIA. | 0.059 (1.5mm) DIA. | 0.069 (1.75mm) | 0.0626 (15.90mm) | 0.059 (1.5mm) DIA. MIN.

# Solder Profile



Meets IPC/JEDEC J-STD-020C

#### nevision nistory

Revision	Date	Description
00	10/23/12	Data sheet released 10/23/12
01	11/12/12	Added Digi-Key
02	02/25/13	Increased frequency range to 100 MHz
03	12/04/13	Updated available Frequencies
04	02/07/14	Removed note from Output Freq
05	02/11/14	Updated specifications
06	04/29/15	Added Additional Package Height for Select Frequencies
07	10/20/15	Updated Allan Deviation specification
08	09/07/16	Updated Phase Noise Plot and Control Voltage Specs
09	09/15/16	Updated Ordering Information
10	08/07/18	Updates to T&R, Package Dimensions, Added Marking Info

Date	07 Aug 2018
Revision	10
Page	6 of 6
Bulletin	Tx380