
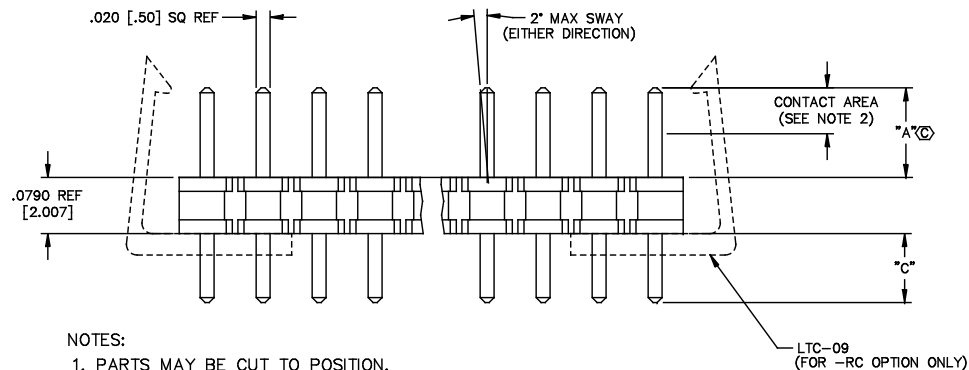


TABLE 1				
LEAD STYLE	"A"	"B"	TERMINAL	"C"
-01	.126 [3.20]	.302 [7.67]	T-1S13-07-XX-2	.097 [2.46] REF
-04	.075 [1.91]	.255 [6.48]	T-1S13-04-XX-2	.101 [2.57] REF
* -05	.065 [1.65]	.234 [5.94] REF	T-1S13-07-XX-2	.090 [2.29]
-21	.126 [3.20]	.255 [6.48]	T-1S13-04-XX-2	.050 [1.27] REF
-22	.075 [1.91]	.204 [5.18]	T-1S13-25-XX-2	.050 [1.27] REF
-06	.126 [3.20]	.344 [8.74]	T-1S13-31-XX-2	.139 [3.53] REF

* SEE NOTE 5

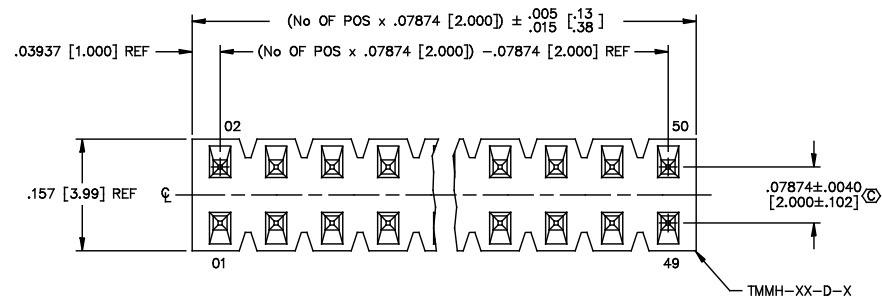


NOTES:


- PARTS MAY BE CUT TO POSITION.
- GOLD PLATING TO BE ON POST, TIN PLATING ON TAIL.
- ⊙ REPRESENTS A CRITICAL DIMENSION.
- MINIMUM PUSHOUT FORCE: 1.0 LB.
- MUST SHEAR TO DIMENSION SHOWN.
- NOTE DELETED
- MAX CUT FLASH: .020 [.51]
- WAVE SOLDER APPLICATION ONLY.
- RETAINING CLIP FOR -06 LEAD STYLE ONLY.
- DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -EC, -EBC, AND -EPC OPTION.

FIG. 1

UNLESS OTHERWISE NOTED			TITLE:	DWG NO:
DIMENSIONS ARE IN INCHES		TOLERANCES ARE:	2mm x 2mm TERMINAL STRIP ASSEMBLY	TMMH-1XX-XX-XX-D-XXX-XXX
ONE PLACE DECIMALS ±.1[2.5] TWO PLACE DECIMALS ±.01[.3]	THREE PLACE DECIMALS ±.005[.13] FOUR PLACE DECIMALS ±.0020[.051]	ANGLES ± 2°		
			SHEET 3	

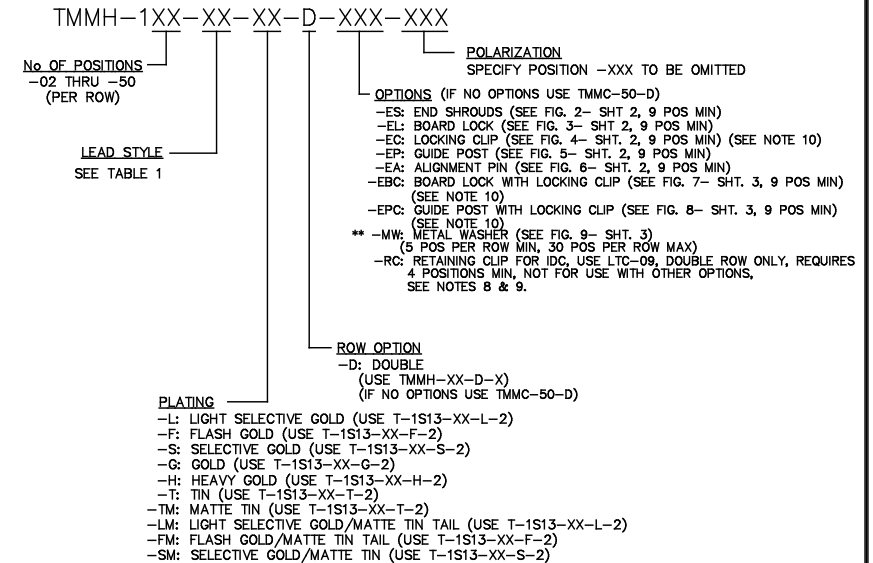

** -MW OPTION, DO NOT DESIGN IN. SAMTEC WILL ONLY SUPPORT EXISTING BUSINESS 2/05/02.

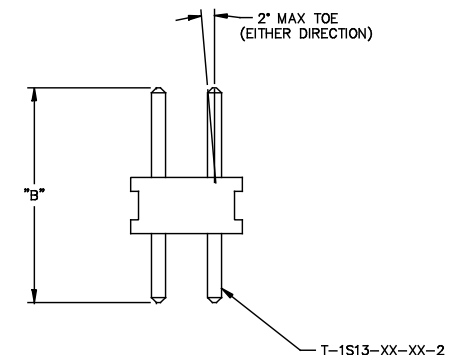

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSMITTED IN
ANY FORM OR BY ANY MEANS, ELECTRONIC
OR MECHANICAL, INCLUDING PHOTOCOPYING,
RECORDING, OR BY ANY INFORMATION
SYSTEMS WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:
BLACK, LCP
TERMINAL:
PHOSPHOR BRONZE

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:
PURVIS 12-17-96

TMMH-1XX-XX-XX-D-XXX-XXX
SHEET 1 OF 3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[TMMH-122-01-LM-D](#) [TMMH-131-01-T-D](#) [TMMH-115-01-F-D-ES](#) [TMMH-117-01-TM-D](#) [TMMH-134-01-T-D](#) [TMMH-111-01-F-D-EL](#) [TMMH-140-01-S-D-EP](#) [TMMH-125-01-F-D-EC](#) [TMMH-140-01-L-D-ES](#) [TMMH-114-01-T-D](#) [TMMH-117-01-L-D-EL](#) [TMMH-140-01-F-D-EP](#) [TMMH-150-01-F-D-ES](#) [TMMH-125-01-T-D](#) [TMMH-130-01-F-D-EP](#) [TMMH-114-01-S-D](#) [TMMH-135-01-L-D](#) [TMMH-110-01-LM-D-ES](#) [TMMH-140-01-F-D-008](#) [TMMH-110-01-SM-D-ES](#) [TMMH-135-01-F-D-ES](#) [TMMH-138-01-G-D](#) [TMMH-102-01-S-D](#) [TMMH-116-01-F-D-EL](#) [TMMH-135-01-F-D](#) [TMMH-136-01-S-D](#) [TMMH-135-01-F-D-RA-066](#) [TMMH-136-01-L-D-ES](#) [TMMH-136-01-L-D](#) [TMMH-121-01-F-D-ES](#) [TMMH-118-01-G-D-ES-036](#) [TMMH-118-01-F-D-ES](#) [TMMH-124-01-L-D-ES](#) [TMMH-137-01-L-D](#) [TMMH-133-01-F-D-ES](#) [TMMH-121-01-F-D](#) [TMMH-130-01-L-D-EC](#) [TMMH-133-01-T-D](#) [TMMH-113-01-F-D-EL](#) [TMMH-117-01-S-D-FE](#) [TMMH-111-01-H-D-ES](#) [TMMH-115-01-H-D-RA](#) [TMMH-126-01-G-D-ES](#) [TMMH-106-01-S-D](#) [TMMH-142-06-H-D](#) [TMMH-105-06-F-D](#)