
## **QR/P4 SERIES**

#### Small Rectangular Multi-electrode Solderless Connectors for Racks and Panels

#### General

QR/P4 Series is a series of small connectors for rack and panel application. This is a smaller-size version of the QR/P and QR/P1 Series, whose rectangular multielectrode plug in connectors for racks and panels have been well received in the market.

Six models with different numbers of contacts are available: 8, 12, 16, 24 32 and 40. Wires are connected to the connectors without solder for easier connection and higher reliability.

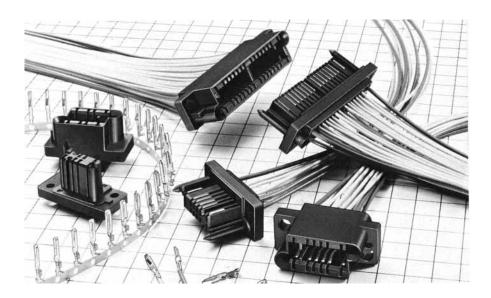

#### **Features**

- (1) The pins can be smoothly inserted into the receptacle, and give stable contact pressure beause of their point contact with the receptacle blades. Furthermore, they have a larger allowance for the variation of connection length - a characteristic of plug-in connections.
- (2) The connector size has been made smaller by separating the terminals for signals from those for voltage supply.
- (3) The pitch of the signal terminals inside the housing is 2.54mm. Tow pairs of diametrically opposed electrodes (four electrodes in total) on the two sides are arranged with a pitch of 5.08mm so that they can

- withstand high voltage, and can be used for power supply. In addition, a nonflammable material (UL94V-0) is used as the insulating housing of the connectors.
- (4) Guide pins and the housing body are molded as one piece to achieve a smaller connector size.
- (5) Since the connectors are mounted on racks or panels with stepped screws, connection and disconnection can be done easily.
- (6) The contact for female terminals in the housing is deeper than the fitting surface of the housing which conforms to the finger test (UL Standard 1950).
- (7) The connectors of this series have passed UL, CSA and TÜV standard.

## **Application**

PPC, Transmission and reception equipment, Data Communication, Vending Machine, Measuring Instruments, Automatic Equipment, Switchboards, etc.

## **Specification**

٠.				
	Item	Specifications		
	Contact Resistance	Power	Max. 15mΩ at DC1A	
	Contact Resistance	Signal	Max. 15mΩ at DC1A	
	Insulation Resistance	Min. 500	00MΩ at DC500V	
	Withstand Voltage	Power	AC 2000V	
	(for 1 minute)	Signal	AC 500V	
	Rated Current	Power	3A	
	Rated Current	Signal	1A	
	Rated Voltage	Power	AC 300V	
	Kateu voitage	Signal	AC 250V	

Item	Material	Finish		
Insulator	PBT resin *:UL94V-0	Black		
Contact	Phosphor Bronze	Selective Gold plating over Nickel		

Ratings authorized by QR/P4 safety standards								
Safety standard		J	JL. CSA. TÜV					
Operating temperature			-10~+60°C					
Rated	Power supply	AC 30V	AC380V, DC450V					
Voltage	Signal unit	AC 250V	AC120V, DC150V					
	AWG#20	3A	2.5A					
	AWG#22	) JA						
Rated	AWG#24	2A	1A					
Carrone	AWG#26	1.0						
	AWG#28	1A						

## **Ordering Information**

▲ Connector Unit

$$\frac{QR/P4}{|} - \frac{12P}{|} - \frac{C}{|} - \frac{(01)}{|}$$
(1) (2)(3) (4) (10)

▲ Contact



- (1) Series name
- (2) No.of contacts (8, 12, 16, 24, 32, 40)
- (3) Type of Housing
  - P: Plug Housing
  - S: Socket Housing
- (4) Type of termination
  - C: Criming
- (5) Type of Contact
  - PC: Pin Contact
  - SC: Socket Contact


- (6) Size of Barrel
  - 2A: Thin Wire (UL1007 Type)
  - 2B: Thin Wire (UL1007 Type) . . . For 4 contact holes at both ends
- (7) Contact Type
  - 1: Loose Contact
  - 2: Chain Contact
- (8) Applicable wire
  - - 1: Thin Wire AWG #24 #28
  - 2: Thick Wire AWG #20 #24
- (9) Finish
  - 1: Selective Gold plated over Nickel
- (10) UL, CSA, TÜV

Approved Spec

## Housing

## Male Housing




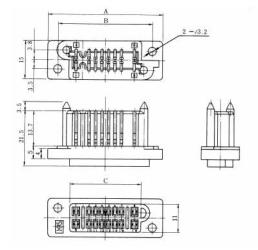

						U	nit: mm
	HRS No.	No. of Pin	Part No.	А	В	С	RoHS
Ī	CL221-0159-5-01	8	QR/P4- 8P-C (01)	34.68	26.68	17.68	
	CL221-0139-8-01	12	QR/P4-12P-C (01)	39.8	31.8	22.8	
	CL221-0155-4-01	16	QR/P4-16P-C (01)	44.84	36.84	27.84	
	CL221-0141-0-01	24	QR/P4-24P-C (01)	55	47	38	
	CL221-0153-9-01	32	QR/P4-32P-C (01)	67.7	59.7	50.7	
	CL221-0211-3-01	40	QR/P4-40P-C (01)	77.86	69.86	60.86	

Female Housing




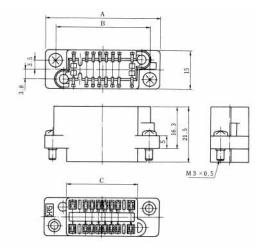

				U	nit: mm
No. of Pin	Part No.	A	В	С	RoHS
8	QR/P4- 8S-C (01)	34.68	26.68	17.68	
12	QR/P4-12S-C (01)	39.8	31.8	22.8	
16	QR/P4-16S-C (01)	44.84	36.84	27.84	
24	QR/P4-24S-C (01)	55	47	38	
32	QR/P4-32S-C (01)	67.7	59.7	50.7	
40	QR/P4-40S-C (01)	77.86	69.86	60.86	
	8 12 16 24 32	8 QR/P4-8S-C (01) 12 QR/P4-12S-C (01) 16 QR/P4-16S-C (01) 24 QR/P4-24S-C (01) 32 QR/P4-32S-C (01)	8 QR/P4-8S-C (01) 34.68 12 QR/P4-12S-C (01) 39.8 16 QR/P4-16S-C (01) 44.84 24 QR/P4-24S-C (01) 55 32 QR/P4-32S-C (01) 67.7	8 QR/P4-8S-C(01) 34.68 26.68 12 QR/P4-12S-C(01) 39.8 31.8 16 QR/P4-16S-C(01) 44.84 36.84 24 QR/P4-24S-C(01) 55 47 32 QR/P4-32S-C(01) 67.7 59.7	No. of Pin         Part No.         A         B         C           8         QR/P4-8S-C (01)         34.68         26.68         17.68           12         QR/P4-12S-C (01)         39.8         31.8         22.8           16         QR/P4-16S-C (01)         44.84         36.84         27.84           24         QR/P4-24S-C (01)         55         47         38           32         QR/P4-32S-C (01)         67.7         59.7         50.7

Note: Determine the combinations with the panel so that the mating clearance between the P side and S side is 1.5mm or less.


#### Contact

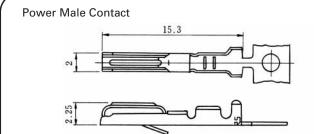

Selective gold plated with nickel under plating

			_	-	
Applicable Wire	HRS No.	Part No.	Туре	Packing	RoHS
		QR/P1-PC2B-121 (12)	Loose contact	100pin	
AWG#20~24	CL221-0119-0-12	QR/P1-PC2B-221 (12)	Chain contact	5,000pin	


#### Power Female Contact



Selective gold plated with nickel under plating

Applicable Wire	HRS No.	Part No.	Туре	Packing	RoHS
AWG#20~24		QR/P1-SC2B-121 (12)	Loose contact	100pin	
		QR/P1-SC2B-221 (12)	Chain contact	5,000pin	


### **Contact**

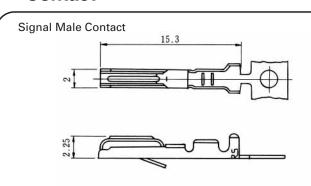

Partly gold plated over nickel plating

Applicable Wire	HRS No.	Part No.	Туре	Packing	RoHS
AWG#20~24		QR/P1-PC2A-111 (12)	Loose contact	100pin	
		QR/P1-PC2A-211 (12)	Chain contact	5,000pin	


Signal Female Contact




Partly gold plated over nickel plating

Applicable Wire	HRS No.	Part No.	Туре	Packing	RoHS
AWG#24~28	CL221-0105-6-12	QR/P1-SC2A-111 (12)	Loose contact	100pin	
AWG#24**20		QR/P1-SC2A-211 (12)	Chain contact	5,000pin	)


## **Panel Cutout**





No. of pi	n	8pin	12pin	16pin	24pin	32pin	40pin
	Α	15.87	18.45	20.97	26.05	32.4	37.48
Rear Mount-	В	19.18	24.3	29.34	39.5	52.2	62.36
ing	С	20.18	25.3	30.34	40.5	53.2	63.36
	D	26.68	31.8	36.84	47	59.7	69.86
Front	Е	18.18	23.3	28.34	38.5	51.2	61.36
Mount-	F	21.68	26.8	31.84	42	54.7	64.86
ing	G	26.68	31.8	36.84	47	59.7	69.86

QR/P4- \* S-C



No. of pi	n	8pin	12pin	16pin	24pin	32pin	40pin
	Α	16.87	18.95	21.49	26.57	32.9	37.98
Rear Mount-	В	19.68	24.8	29.84	40	52.7	62.86
ing	С	20.18	25.3	30.34	40.5	53.2	63.36
	D	26.68	31.8	36.84	47	59.7	69.86
Front	Е	26.68	31.8	38.84	47	59.7	69.86
Mount-	F	19.18	24.3	29.34	39.5	52.2	62.36
ing	G	22.68	27.8	32.84	43	55.7	65.68

# Tooling








Auto Crimp Machine CM-105 CL901-0005-4

Kind	HRS No.	Part No.	Applicator Contact
	CL250-0021-3	TC-QR/P1-PC2B	QR/P1-PC2B-121
Hand Crimp	CL250-0016-3	TC-QR/P1-PC2A	QR/P1-PC2A-111
Tool	CL250-0023-9	TC-QR/P1-SC2B	QR/P1-SC2B-121
	CL250-0018-9	TC-QR/P1-SC2A	QR/P1-SC2A-111
	CL901-2530-5	AP105-QR/P1-2B-2	QR/P1-PC2B-221
Auto Crimp Machine	CL901-2550-5	AP105-QR/P1-2B-2	QR/P1-SC2B-221
Applicator	CL901-2528-3	AP105-QR/P1-2A-1	QR/P1-PC2A-211
	CL301-2326-3	AF 100-QR/P1-2A-1	QR/P1-SC2A-211
Extraction Tool	CL250-0029-5	TC-QR/P4-21	QR/P1-SC2, PC2

## **Contacts for thick wire Contact Configuration**

Male Housing (Viewed from Wiring Side)

: indicates a contact hole for thick wire

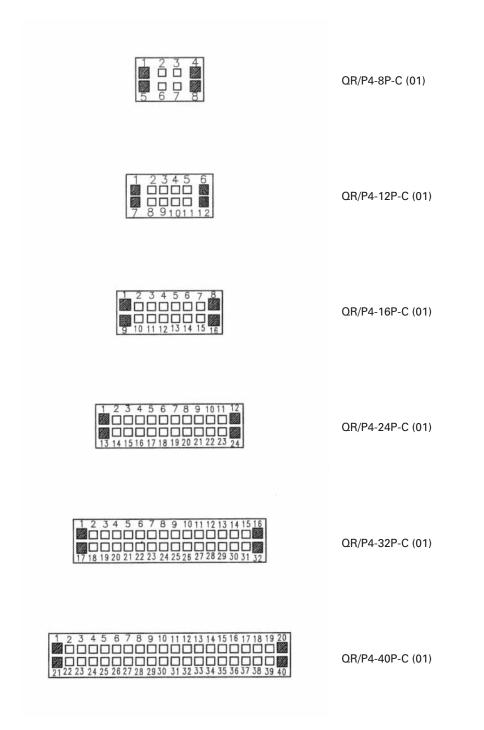

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## **Hirose Electric:**

TC-QR/P4-21 QR/P4-12P-C(01) QR/P4-12S-C(01) QR/P4-12S-C(02) QR/P4-24P-C(01) QR/P4-24P-C(06) QR/P4-24S-C(01) QR/P4-32P-C(06) QR/P4-32S-C(01) QR/P4-32S-C(02) QR/P4-32S-C(06) QR/P4-16P-C(01) QR/P4-16S-C(01) QR/P4-16S-C(02) QR/P4-16S-C(02) QR/P4-SCREW QR/P4-SCREW(01) QR/P4-40P-C(01) QR/P4-40S-C(01) QR/P4-40S-C(02)