



**PDS560** 

#### 5A SCHOTTKY BARRIER RECTIFIER POWERDI5

### **Product Summary**

ĺ	V <sub>RRM</sub> (V)	I <sub>0</sub> (A)	V <sub>F</sub> max (V) @ +25°C	I <sub>R max</sub> (μΑ) @ +25°C
	60	5	0.60	150

# **Description and Applications**

Designed to meet the stringent requirements of automotive applications. It is ideally suited to use as:


- Polarity Protection Diode
- Recirculating Diode
- Switching Diode

#### Features


- Guard Ring Die Construction for Transient Protection
- High Surge Current Capability
- Low Leakage Current
- Low Power Loss, High Efficiency
- For Use in High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- High Forward Surge Current Capability
- Lead-Free Finish; RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- Qualified to AEC-Q101 Standards for High Reliability

#### **Mechanical Data**

- Case: PowerDI5
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Matte Tin Finish Annealed over Copper Leadframe. Solderable per MIL-STD-202, Method 208 (3)
- Polarity: See Diagram
- Weight: 0.093 grams (Approximate)



PowerDI<sup>®</sup>5



Note: Pins Left & Right must be electrically connected at the printed circuit board.

#### Ordering Information (Note 4)

Part Number	Case	Packaging
PDS560-13	PowerDI5	5000/Tape & Reel

 EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.

3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

S560 = Product Type Marking Code

) | | = Manufacturers' Code Marking YYWW = Date Code Marking

WW = Week Code (01 - 53)

K = Factory Designator

YY = Last Two Digits of Year (ex: 15 for 2015)

4. For packaging details, go to our website at http://www.diodes.com.

# **Marking Information**

Notes:





#### Maximum Ratings (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Single phase, half wave, 60Hz, resistive or inductive load.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	60	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	42	V
Average Rectified Output Current	lo	5	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load	I <sub>FSM</sub>	150	А

# **Thermal Characteristics**

Characteristic	Symbol	Тур	Max	Unit
Thermal Resistance Junction to Soldering Point	Rejs		2.0	°C/W
Thermal Resistance Junction to Ambient Air (Note 5) $T_A = +25^{\circ}C$	R <sub>OJA</sub>	95		°C/W
Thermal Resistance Junction to Ambient Air (Note 6) $T_A = +25^{\circ}C$	R <sub>0JA</sub>	70	_	°C/W
Thermal Resistance Junction to Ambient Air (Note 7) $T_A = +25^{\circ}C$	R <sub>OJA</sub>	50	_	°C/W
Operating and Storage Temperature Range	TJ, T <sub>STG</sub>	-65 to	+150	C°

# Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)


Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 8)	V <sub>(BR)R</sub>	60	—	—	V	$I_R = 0.2mA$
		_	0.61	0.67	V	I <sub>F</sub> = 5A, T <sub>S</sub> = +25°C
Forward Voltage	N/	_	0.54	0.60		I <sub>F</sub> = 5A, T <sub>S</sub> = +125°C
Forward voltage	VF	—	0.71	0.77		I <sub>F</sub> = 8A, T <sub>S</sub> = +25°C
		—	—	0.68		I <sub>F</sub> = 8A, T <sub>S</sub> = +125°C
		_	4	150	μA	T <sub>S</sub> = +25°C, V <sub>R</sub> = 60V
Reverse Leakage Current (Note 8)	I <sub>R</sub>	—	_	15	mA	$T_{S} = +100^{\circ}C, V_{R} = 60V$
		—	2	30	mA	$T_{S} = +125^{\circ}C, V_{R} = 60V$


Notes:

5. FR-4 PCB, 2 oz. Copper, minimum recommended pad layout per http://www.diodes.com.

Polymide PCB, 2 oz. Copper, minimum recommended pad layout per http://www.diodes.com.
Polymide PCB, 2 oz. Copper. Cathode pad dimensions 9.4mm x 7.2mm. Anode pad dimensions 2.7mm x 1.6mm.
Short duration pulse test used to minimize self-heating effect.



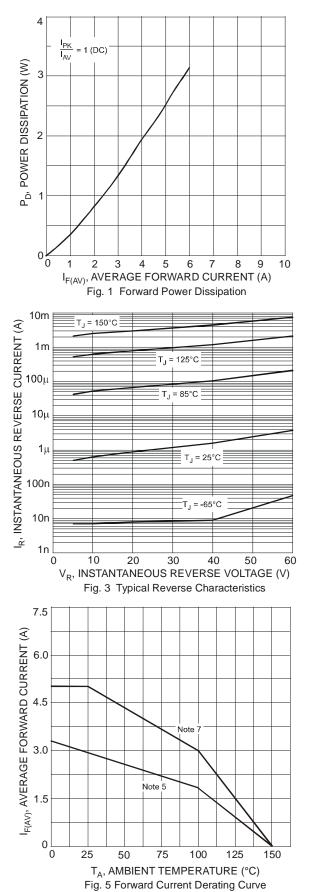

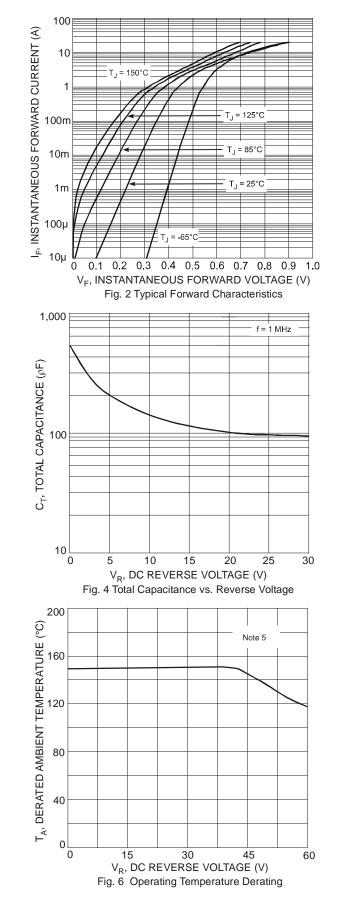


PDS560



# **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

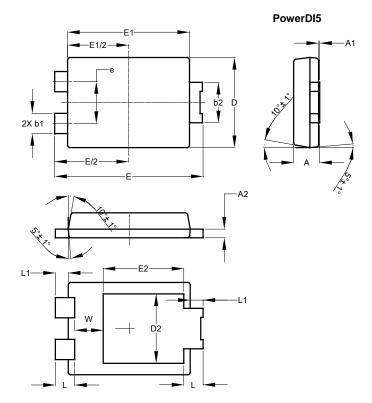


PowerDI5						
Dim	Min	Max	Тур			
Α	1.05	1.15	1.10			
A1	0.00	0.05	_			
A2	0.33	0.43	0.381			
b1	0.80	0.99	0.89			
b2	1.70	1.88	1.78			
D	3.90	4.05	3.966			
D2			3.054			
Е	6.40	6.60	6.51			
e			1.84			
E1	5.30	5.45	5.37			
E2	_	_	3.549			
L	0.75	0.95	0.85			
L1	0.50	0.65	0.57			
W	1.10	1.41	1.255			
All Dimensions in mm						

# **Suggested Pad Layout**

Please see http://www.diodes.com/package-outlines.html for the latest version.

PowerDI5



Dimensions	Value (in mm)
С	1.840
G	0.852
Х	1.400
X1	4.860
X2	1.310
Y	1.390
Y1	3.360



#### IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

- 1. are intended to implant into the body, or
- 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated: PDS560-13