# 2-Bit Translating Bus **Switch**

The 7WBD3125 is an advanced high-speed low-power 2-bit translating bus switch in ultra-small footprints.

## **Features**

- High Speed:  $t_{PD} = 0.25 \text{ ns (Max)} @ V_{CC} = 4.5 \text{ V}$
- 3 Ω Switch Connection Between 2 Ports
- Power Down Protection Provided on Inputs
- Zero Bounce
- TTL-Compatible Control Inputs
- Ultra-Small Pb-Free Packages
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These are Pb-Free Devices



## ON Semiconductor®

http://onsemi.com

## **MARKING DIAGRAMS**



**UDFN8 MU SUFFIX** CASE 517AJ





**UDFN8** 1.95 x 1.0 CASE 517CA





Micro8™ **DM SUFFIX CASE 846A** 





**UQFN8 MU SUFFIX** CASE 523AN





US8 **US SUFFIX CASE 493** 



= Assembly Location

Υ = Year W = Work Week = Date Code Μ = Pb-Free Package


(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

## **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

This document contains information on some products that are still under development. ON Semiconductor reserves the right to change or discontinue these products without

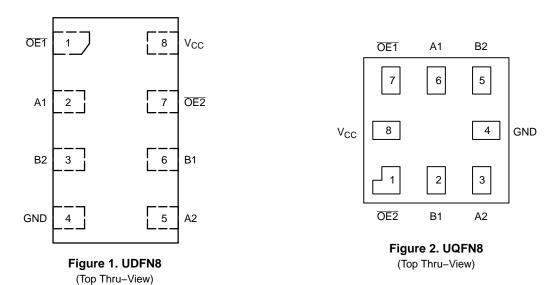




Figure 3. US8/Micro8 (Top View)




Figure 4. Logic Diagram

## **FUNCTION TABLE**

Input OEn	Function
L	Bn = An
Н	Disconnect

#### **MAXIMUM RATINGS**

Symbol	Parameter		Value	Unit
V <sub>CC</sub>	DC Supply Voltage		-0.5 to +7.0	V
V <sub>IN</sub>	Control Pin Input Voltage		-0.5 to +7.0	V
V <sub>I/O</sub>	Switch Input / Output Voltage		-0.5 to +7.0	V
I <sub>IK</sub>	Control Pin DC Input Diode Current	V <sub>IN</sub> < GND	-50	mA
I <sub>OK</sub>	Switch I/O Port DC Diode Current	V <sub>I/O</sub> < GND	-50	mA
Io	ON-State Switch Current		±128	mA
	Continuous Current Through V <sub>CC</sub> or GND		±150	mA
I <sub>CC</sub>	DC Supply Current Per Supply Pin	± 150	mA	
I <sub>GND</sub>	DC Ground Current per Ground Pin	± 150	mA	
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C	
TL	Lead Temperature, 1 mm from Case for 10 Secon	260	°C	
TJ	Junction Temperature Under Bias		150	°C
$\theta_{\sf JA}$	Thermal Resistance	US8 (Note 1) UDFN8 UQFN8 Micro8	251 111 208 392	°C/W
P <sub>D</sub>	Power Dissipation in Still Air at 85°C	US8 UDFN8 UQFN8 Micro8	498 1127 601 319	mW
MSL	Moisture Sensitivity		Level 1	
F <sub>R</sub>	Flammability Rating Oxygen Index: 28 to 34		UL 94 V-0 @ 0.125 in	
V <sub>ESD</sub>	ESD Withstand Voltage  Human Body Mode (Note 2)  Machine Model (Note 3)  Charged Device Model (Note 4)		> 2000 > 200 N/A	V
I <sub>LATCHUP</sub>	Latchup Performance Above V <sub>CC</sub> and Below GNE	O at 125°C (Note 5)	±200	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow.
- 2. Tested to EIA / JESD22-A114-A.
- 3. Tested to EIA / JESD22-A115-A.
- 4. Tested to JESD22-C101-A.
- 5. Tested to EIA / JESD78.

## **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	Positive DC Supply Voltage	4.0	5.5	V
V <sub>IN</sub>	Control Pin Input Voltage	0	5.5	V
V <sub>I/O</sub>	Switch Input / Output Voltage	0	5.5	V
T <sub>A</sub>	Operating Free–Air Temperature	-55	+125	°C
Δt / ΔV	Input Transition Rise or Fall Rate Control Input Switch I/O	0 0	5 DC	nS/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

## DC ELECTRICAL CHARACTERISTICS


			V <sub>CC</sub>		T <sub>A</sub> = 25°(	C	T <sub>A</sub> –55°C to		
Symbol	Parameter	Conditions	(V)	Min	Тур	Max	Min	Max	Unit
V <sub>IK</sub>	Clamp Diode Voltage	$I_{I/O} = -18 \text{ mA}$	4.5			-1.2		-1.2	V
V <sub>IH</sub>	High-Level Input Voltage (Control)		4.0 to 5.5	2.0			2.0		V
V <sub>IL</sub>	Low-Level Input Voltage (Control)		4.0 to 5.5			0.8		0.8	V
V <sub>OH</sub>	Output Voltage High	See Figure 5							
I <sub>IN</sub>	Input Leakage Current	$0 \le V_{IN} \le 5.5 V$	5.5			±0.1		±1.0	μΑ
I <sub>OFF</sub>	Power Off Leakage Current	$V_{I/O} = 0 \text{ to } 5.5 \text{ V}$	0			±0.1		±1.0	μΑ
I <sub>CC</sub>	Quiescent Supply Current	$\begin{aligned} &I_{O}=0,\\ &V_{IN}=V_{CC}\text{ or }0\text{ V}\\ &\overline{\text{OE1}}=\overline{\text{OE2}}=\text{GND}\\ &\overline{\text{OE1}}=\overline{\text{OE2}}=V_{CC} \end{aligned}$	5.5			±1.0 ±0.1		±1.0 ±1.0	mA μA
Δl <sub>CC</sub>	Increase in Supply Current (Control Pin)	One input at 3.4 V; Other inputs at V <sub>CC</sub> or GND	5.5					2.5	mA
R <sub>ON</sub>	Switch ON Resistance	$V_{I/O} = 0,$ $I_{I/O} = 64 \text{ mA}$ $I_{I/O} = 30 \text{ mA}$	4.5		3 3	7 7		7 7	Ω
		$V_{I/O} = 2.4,$ $I_{I/O} = 15 \text{ mA}$			15	50		50	
		$V_{I/O} = 2.4,$ $I_{I/O} = 15 \text{ mA}$	4.0		50	70		70	


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

## **AC ELECTRICAL CHARACTERISTICS**

			V <sub>CC</sub>	T <sub>A</sub> = 25 °C			T <sub>A</sub> = -55°C to +125°C		
Symbol	Parameter	Test Condition	(V)	Min	Тур	Max	Min	Max	Unit
t <sub>PD</sub>	Propagation Delay, Bus to Bus	See Figure 6	4.0 to 5.5			0.25		0.25	ns
t <sub>EN</sub>	Output Enable Time	See Figure 6	4.5 to 5.5	0.8	2.5	4.2	0.8	4.2	ns
			4.0	0.8	3.0	4.6	0.8	4.6	
t <sub>DIS</sub>	Output Disable Time		4.5 to 5.5	0.8	3.0	4.8	0.8	4.8	ns
			4.0	0.8	2.9	4.4	0.8	4.4	
C <sub>IN</sub>	Control Input Capacitance	V <sub>IN</sub> = 5 or 0 V	5.0		2.5				pF
C <sub>IO(ON)</sub>	Switch On Capacitance	Switch ON	5.0		10				pF
C <sub>IO(OFF)</sub>	Switch Off Capacitance	Switch OFF	5.0		5				pF

## **TYPICAL DC CHARACTERISTICS**

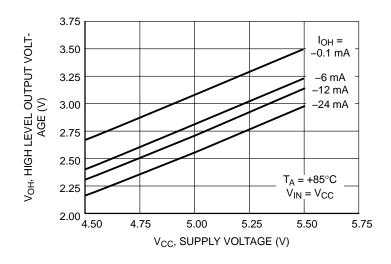

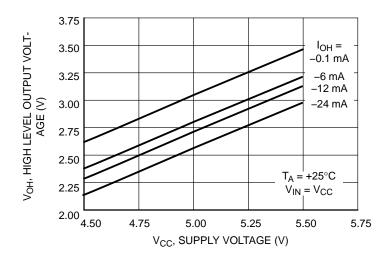


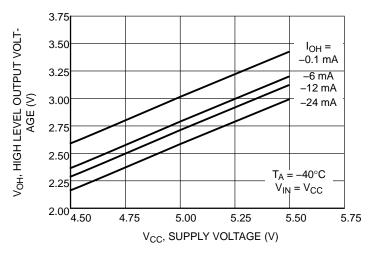


Figure 5. Output Voltage High vs Supply Voltage


## **AC LOADING AND WAVEFORMS**


#### **Parameter Measurement Information**

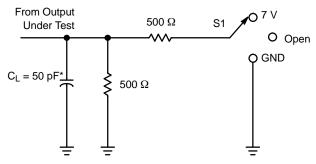

Test	<b>S</b> 1
t <sub>PD</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	7 V
t <sub>PHZ</sub> /t <sub>PZH</sub>	Open

<sup>\*</sup>C<sub>L</sub> includes probes and jig capacitance.





## **Voltage Waveforms Propagation Delay Times**

**Voltage Waveforms Enable and Disable Times** 

- 6. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control
- 7. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O$  = 50  $\Omega$ ,  $t_r \leq$  2.5 ns,  $t_f \leq$  2.5 ns. 8. The outputs are measured one at a time, with one transition per measurement.
- 9. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>DIS</sub>.
- 10. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>EN</sub>.
  11. t<sub>PHL</sub> and t<sub>PLH</sub> are the same as t<sub>PD</sub>.

Figure 6. t<sub>PD</sub>, t<sub>EN</sub>, t<sub>DIS</sub> Loading and Waveforms


## **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
7WBD3125USG	US8 (Pb-Free)	3000 / Tape & Reel
NLV7WBD3125USG*	US8 (Pb-Free)	3000 / Tape & Reel
7WBD3125MUTAG	UDFN8 (Pb-Free)	3000 / Tape & Reel
7WBD3125AMUTCG	UQFN8 (Pb-Free)	3000 / Tape & Reel
7WBD3125DMR2G	Micro8 (Pb-Free)	4000 / Tape & Reel (In Development)
7WBD3125DMUTCG	UDFN8, 1.95 x 1.0, 0.5P (Pb-Free)	3000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q100 Qualified and PPAP Capable.

## **PACKAGE DIMENSIONS**

## UDFN8 1.8 x 1.2, 0.4P CASE 517AJ **ISSUE O**



**BOTTOM VIEW** 

0.10 M C A B

0.05 M C NOTE 3

Ф


#### NOTES:

- NOTES:

  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM TERMINAL TIP.
  4. MOLD FLASH ALLOWED ON TERMINALS ALONG EDGE OF PACKAGE. FLASH MAY NOT EXCEED 0.03 ONTO BOTTOM SURFACE OF TERMINALS.
  5. DETAIL A SHOWS OPTIONAL CONSTRUCTION FOR TERMINALS.

	<b>MILLIMETERS</b>					
DIM	MIN	MAX				
Α	0.45	0.55				
A1	0.00	0.05				
А3	0.127 REF					
b	0.15	0.25				
b2	0.30	REF				
D	1.80	BSC				
E	1.20	BSC				
е	0.40	BSC				
L	0.45	0.55				
L1	0.00	0.03				
L2	0.40	REF				

## **MOUNTING FOOTPRINT\* SOLDERMASK DEFINED**




DIMENSIONS: MILLIMETERS

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## **PACKAGE DIMENSIONS**

UDFN8 1.95x1.0, 0.5P CASE 517CA ISSUE O

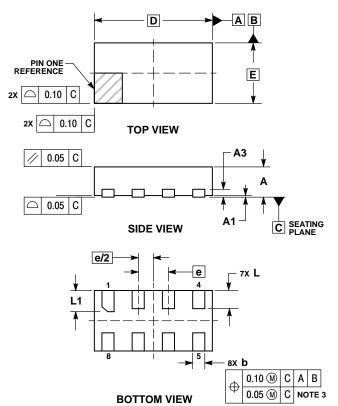

- NOTES:

  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.


  2. CONTROLLING DIMENSION: MILLIMETERS.

  3. DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 MM FROM TERMINAL TIP.

  4. PACKAGE DIMENSIONS EXCLUSIVE OF BURRS AND MOLD FLASH.

	MILLIMETERS					
DIM	MIN MAX					
Α	0.45	0.55				
A1	0.00	0.05				
A3	0.13	REF				
b	0.15	0.25				
D	1.95	BSC				
E	1.00	BSC				
е	0.50 BSC					
L	0.25	0.35				
11	0.30	0.40				


### **RECOMMENDED SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## **PACKAGE DIMENSIONS**


## UQFN8, 1.6x1.6, 0.5P CASE 523AN ISSUE O

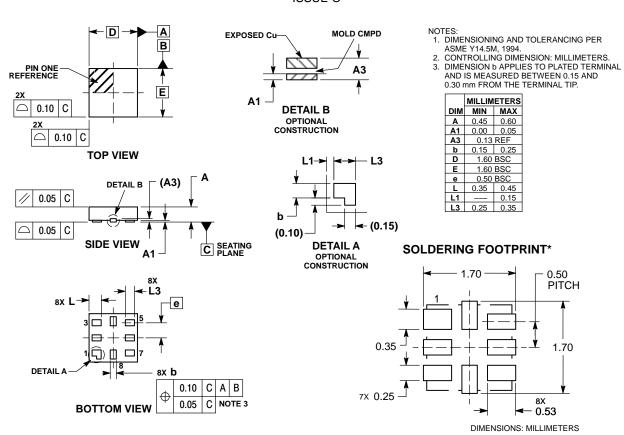

\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## PACKAGE DIMENSIONS

## US8 **CASE 493 ISSUE B**

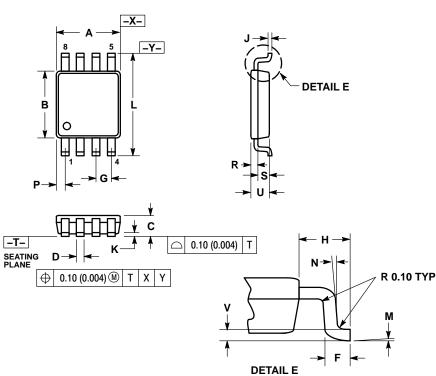


- NOTES:
  1. DIMENSIONING AND TOLERANCING PER
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
   CONTROLLING DIMENSION: MILLIMETERS.
   DIMENSION "A" DOES NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURR. MOLD FLASH. PROTRUSION ON GATE BURR SHALL NOT EXCEED 0.140 MM (0.0055") PER SIDE.
   DIMENSION "B" DOES NOT INCLUDE INTER-LEAD FLASH AND PROTRUSION. INTER-LEAD FLASH AND PROTRUSION SHALL NOT E3XCEED 0.140 (0.0055") PER SIDE.
- SIDE.

  5. LEAD FINISH IS SOLDER PLATING WITH
- THICKNESS OF 0.0076-0.0203 MM. (300-800 ").
  ALL TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.0508 (0.0002 ").

	MILLIN	IETERS	INC	HES
DIM	MIN	MAX	MIN	MAX
Α	1.90	2.10	0.075	0.083
В	2.20	2.40	0.087	0.094
С	0.60	0.90	0.024	0.035
D	0.17	0.25	0.007	0.010
F	0.20	0.35	0.008	0.014
G	0.50	BSC	0.020	BSC
Н	0.40	REF	0.016	REF
J	0.10	0.18	0.004	0.007
K	0.00	0.10	0.000	0.004
L	3.00	3.20	0.118	0.126
М	0°	6 °	0°	6 °
N	5 °	10 °	5 °	10 °
Р	0.23	0.34	0.010	0.013
R	0.23	0.33	0.009	0.013
S	0.37	0.47	0.015	0.019
U	0.60	0.80	0.024	0.031
٧	0.12	BSC	0.005	BSC


## **SOLDERING FOOTPRINT\***




\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### PACKAGE DIMENSIONS

Micro8™ CASE 846A **ISSUE H** 





#### NOTES:


- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- DIMENSIONING MULT OLD ANY UNITED ANY UNITED AND THE JOB J. 1992.

  CONTROLLING DIMENSION: MILLIMETER.

  DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
- DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
- 846A-01 OBSOLETE, NEW STANDARD 846A-02.

	MILLIMETERS				INCHES	
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α			1.10		1	0.043
A1	0.05	0.08	0.15	0.002	0.003	0.006
b	0.25	0.33	0.40	0.010	0.013	0.016
С	0.13	0.18	0.23	0.005	0.007	0.009
D	2.90	3.00	3.10	0.114	0.118	0.122
E	2.90	3.00	3.10	0.114	0.118	0.122
е		0.65 BSC		0.026 BSC		
L	0.40	0.55	0.70	0.016	0.021	0.028
HE	4.75	4.90	5.05	0.187	0.193	0.199

#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

Micro8 is a trademark of International Rectifier.

ON Semiconductor and una are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its partner rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

**Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada **Fax**: 303–675–2176 or 800–344–3867 Toll Free USA/Canada

Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## **ON Semiconductor:**

7WBD3125MUTAG 7WBD3125AMUTCG 7WBD3125USG NLV7WBD3125USG