GHA300F

Ordering information

A 300





Example recommended EMI/EMC filter EAC-10-472



High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply. 1) Series name 2) Single output 3) Output wattage 4) Universal input 5) Output voltage

®Optional *6

T3: mounting hole M3 : VH(J.S.T.)connector type

J3 : Horizontal input connector VH(J.S.T.)connector type R3 : with Subfeatures (5VAUX,12VAUX,Remote, Power good)

Specification is changed at option, refer to Instruction manual.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit, please handle the unit with care *Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL		GHA300F-12	GHA300F-24	GHA300F-48
MAX OUTPUT WATTAC	GE[W]	300	300	302.4
	Forced air at 50°C	12V 25A	24V 12.5A	48V 6.3A
DC OUTPUT	Convection at 40°C	12V 8.4A	24V 4.2A	48V 2.1A
	at 50℃	12V 4.5A	24V 2.2A	48V 1.1A

	MODEL		GHA300F-12	GHA300F-24	GHA300F-48				
1	VOLTAGE[V]		AC90 - 264 1 ϕ (output derating is r	required at AC90V -115V *3)					
	OLIDDENTIAL	ACIN 120V	3.3typ						
		ACIN 230V							
FREQUENCY[Hz]			50 / 60 (47 - 63)						
	EFFICIENCY(S)		89typ	90typ	90typ				
NPUT	EFFICIENCY[%]	ACIN 230V	91typ	92typ	92typ				
	POWER FACTOR	ACIN 120V	0.95typ						
	(lo=100%)	ACIN 230V	0.90typ						
	INRUSH CURRENT[A]	ACIN 120V	20typ (Io=100%) (At cold start) (Ta	Otyp (Io=100%) (At cold start) (Ta=25°C)					
L	INNUSH CUNNENT[A]	ACIN 230V	40typ (Io=100%) (At cold start) (Ta	a=25℃)					
	LEAKAGE CURREN	T[mA]	0.125/0.250max (ACIN 120V/240V 60Hz,lo=100%, According to IEC60601-1)						
	VOLTAGE[V]		12	24	48				
		Forced air		12.5	6.3				
		Convection		2.2	1.1				
	LINE REGULATION[I		48max	96max	192max				
	LOAD REGULATION			150max	240max				
	RIPPLE[mVp-p] *1		240max	240max	300max				
	[b b]		320max	320max	400max				
DUTPUT	RIPPLE NOISE[mVp-p]*1		300max	300max	480max				
_			360max	360max	500max				
-	TEMPERATURE REGULATION[mV]		120max	240max	480max				
			150max	290max	600max				
	DRIFT[mV]	*2	48max	96max	192max				
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)						
	HOLD-UP TIME[ms]	DANOFRE	16typ (ACIN 120V, Io=100%)	04 00 t- 00 40	40.00 to 50.00				
	OUTPUT VOLTAGE ADJUSTMENT		10.80 to 13.20	21.60 to 26.40 24.00 to 24.96	43.20 to 52.80 48.00 to 49.92				
	OUTPUT VOLTAGE SET OVERCURRENT PROT		12.00 to 12.48 Works over 105% of rating and rec		48.00 to 49.92				
	OVERCORRENT PROTECT			27.60 to 33.60	55.20 to 67.20				
	AUX1 (12V1A)	TION[V]	Optional	27.00 10 33.00	55.20 10 67.20				
	AUX2 (5V1A)		Optional						
	REMOTE ON/OFF		Optional						
<u> </u>	PowerGood		Optional						
	INPUT-OUTPUT · RC ·	ΔIIY *7	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 2MOPP						
	INPUT-FG	AUA W	AC2,000V 1minute, Outoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 1MOPP						
	OUTPUT · RC · AUX-	FG *7	AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)						
	OUTPUT-RC · AUX								
	OPERATING TEMPHUMID.AND								
STORAGE TEMP., HUMID.AND ALTITUDE									
	VIBRATION		10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis						
IMPACT			196.1m/s² (20G), 11ms, once each X, Y and Z axis						
AFETY AND	ACENCY ADDDOVAL		UL60950-1, ANSI/AAMI ES60601-1, C-UL(CSA60950-1, CAN/CSA60601-1), EN60950-1, EN60601-1 3rd,						
IOICE	AGENCY APPROVAL		Complies with DEN-AN, IEC60601-						
REGULATIONS	CONDUCTED NOISE		Complies with FCC-B, VCCI-B, CISI		N55022-B				
	HARMONIC ATTENU		Complies with IEC61000-3-2 (class						
	CASE SIZE/WEIGHT		76.2×35×127mm [3.0×1.4×5.0 i						
TITENS	COOLING METHOD		Convection, Forced air (Require ext	ternal fan)					


- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Derating is required.
- Please contact us about dynamic load and input response.
- *5 Please contact us about another class.

- Specification is changed at option, refer to Instruction Manual.
- Applicable when AUX and remote control (optional) is added.
- To meet the specifications. Do not operate over-loaded condition. Sound noise may be generated by power supply in case of pulse load.
- Parallel operation is not possible.
- Forced air cooling is required to output up to MAX OUTPUT WATTAGE.
- Bottom layer P.C.B has electric potential which is required isolation from FG by clearance or creepage as the safety design issue.




- · High Power density:14.3W/inch3
- · High efficiency 92% typ (Input Voltage 230V, Output Voltage 24V)
- · 3"× 5 "standard footprint
- · Fits 1U applications
- Industrial and Medical safety approvals
- · Low leakage current
- With Remote On/Off (Optional)
- With AUX1 (12V), AUX2 (5V) (Optional)
- · No minimum load is required

Block diagram

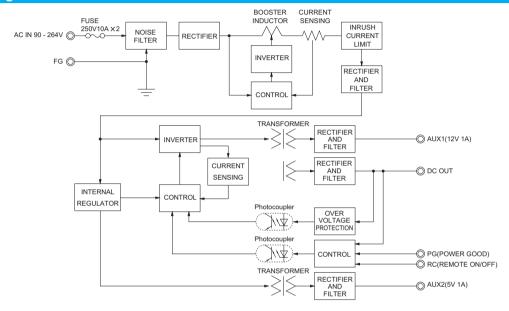

External view

*External size of option J3 is different from standard model and refer to 5 Option and Others of instruction manual for details.

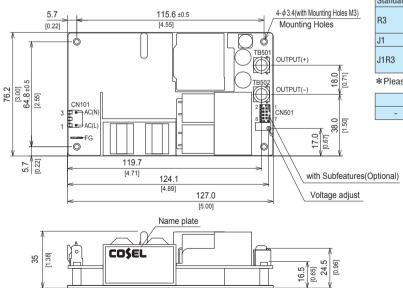

- ** Tolerance ±1 [±0.04]
- Weight: 400g max
- ** There is a total of four attachment holes.

 ** This power supply requires mounting on metal standoffs 5mm in height.
- (Insulating sheet is required if you do not use a spacer).
- Dimensions in mm, []=inches
 Screw tightening torque : (TB501, 502) : 1.5N · m max
- Mounting toque: 0.6N · m max
 Avoid contact between TB501 and 502 wiring with mounting parts.
- Option : -J1 : (J.S.T) connector type. Refer to Instruction Manual 5.

	Con	nector	Mating connector	Terminal	Mfr
Standard	CN101	A-41671-A03A197-2	00-50-8031	08-50-0105	Molex *
R3	CN101	A-41071-A00A197-2	03-30-0031	08-65-0114	
CN501		087831-0820	51110-0851	50394-8051	
J1	CN101	B2P3-VH	VHR-3N	SVH-21T-P1.1	J.S.T.
J1R3	CN101	DZF3-VII	VIIV-9IN	ЗVП-211-Р1.1	
JINO	CN501	B8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	

*Please note the pin position No.1 is different from Molex.

FG		Mating connector	Terminal	Mfr	
-	250 Series	-	170603-2	Tyco Electronics	

<Pin Assignments>

<CN101>

Pin No.	Input
1	AC(L)
2	
3	AC(N)

<CN501(Optional)>

Pin No.	Function
1	AUX1 : AUX1 (12V1A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)



CN501

Ordering information

GHA500F





High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply. 1) Series name 2) Single output 3) Output wattage

3 Output wattage 4 Universal input 5 Output voltage 6 Optional *6

T3 : mounting hole M3 J1 : VH(J.S.T.)connector type J3 : Horizontal input connector VH(J.S.T.)connector type

R3 : with Subfeatures (5VAUX,12VAUX,Remote, Power good)

P : Parallel Operation

Specification is changed at option, refer to Instruction manual.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit, please handle the unit with care *Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL			GHA500F-12	GHA500F-15	GHA500F-24	GHA500F-30	GHA500F-48	GHA500F-56
MAX OUTPUT WAT	TTAGE[W]		500.4	501	504	501	504	504
	Forced air at	50℃	12V 41.7A	15V 33.4A	24V 21.0A	30V 16.7A	48V 10.5A	56V 9.0A
	Convection at	40 ℃	12V 12.5A	15V 10.0A	24V 6.3A	30V 5.0A	48V 3.2A	56V 2.7A
DC OUTPUT	at	50℃	12V 9.2A	15V 7.4A	24V 4.6A	30V 3.7A	48V 2.3A	56V 1.9A
	conduction at	0℃	12V 30.0A	15V 24.0A	24V 15.0A	30V 12.0A	48V 7.5A	56V 6.4A
	cooling	50℃	12V 16.7A	15V 13.4A	24V 8.4A	30V 6.7A	48V 4.2A	56V 3.6A

	MODEL		GHA500F-12	GHA500F-15	GHA500F-24	GHA500F-30	GHA500F-48	GHA500F-56
	VOLTAGE[V]		AC90 - 264 1 \$\phi\$ (output derating is required at AC90V -115V *3)					
	CURRENT[A]	ACIN 120V	5.4typ					
	CORRENT[A]	ACIN 230V	2.9typ					
	FREQUENCY[Hz]		50 / 60 (47 - 63)					
	EFFICIENCY[%]	ACIN 120V	88typ	90typ	90typ	90typ	90typ	90typ
INPUT	EFFICIENCY[%]	ACIN 230V	90typ	92typ	92typ	92typ	92typ	92typ
	POWER FACTOR	ACIN 120V	0.95typ					
	(lo=100%)							
	INRUSH CURRENT[A]	ACIN 120V	20typ (lo=100%)) (At cold start) (T	a=25℃)			
	INNUSTI CONNENT[A]	ACIN 230V	40typ (lo=100%)) (At cold start) (T	a=25℃)			
	LEAKAGE CURREN	T[mA]		(ACIN 120V/240V		According to IEC6		
	VOLTAGE[V]		12	15	24	30	48	56
		Forced air		33.4	21.0	16.7	10.5	9.0
	CURRENT[A]	Convection		7.4	4.6	3.7	2.3	1.9
		conduction cooling		13.4	8.4	6.7	4.2	3.6
	LINE REGULATION[60max	96max	120max	192max	192max
	LOAD REGULATION			120max	150max	180max	240max	240max
	RIPPLE[mVp-p] *1		240max	240max	240max	300max	300max	400max
	uleerefillsh-bl 🔩	-20 - 0℃	320max	320max	320max	400max	400max	500max
OUTPUT	DIDDLE NOICE[mVm m1/st	0 to +50°C	300max	300max	300max	480max	480max	500max
	RIPPLE NOISE[mVp-p]*1	-20 - 0°C	360max	360max	360max	500max	500max	580max
	TEMPERATURE REGULATION[mV]	0 to +50°C	120max	150max	240max	300max	480max	480max
		-20 to +50°C	150max	180max	290max	360max	600max	600max
			48max	60max	96max	120max	192max	192max
	START-UP TIME[ms] HOLD-UP TIME[ms]		500typ (ACIN 120V, Io=100%)					
			16typ (ACIN 120					
	OUTPUT VOLTAGE ADJUSTMENT		10.80 to 13.20		21.60 to 26.40	27.00 to 31.50	43.20 to 52.80	52.00 to 56.00
	OUTPUT VOLTAGE SET		12.00 to 12.48	15.00 to 15.30	24.00 to 24.96	30.00 to 31.20	48.00 to 49.92	55.00 to 56.00
	OVERCURRENT PROT			% of rating and red				
PROTECTION	OVERVOLTAGE PROTEC	CTION[V]	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	34.50 to 42.00	55.20 to 67.20	60.00 to 69.00
CIRCUIT AND	AUX1 (12V1A)		Optional					
OTHERS	AUX2 (5V1A)		Optional					
UTILLIS	REMOTE ON/OFF		Optional					
	PowerGood		Optional					
	INPUT-OUTPUT · RC	· AUX *7						
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1M0PP					
ISOLATION	OUTPUT · RC · AUX-							
			AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)					
	OPERATING TEMP.,HUMID.AND ALTITUDE STORAGE TEMP.,HUMID.AND ALTITUDE							
ENVIRONMENT								
LITTIIONWENT	VIBRATION					tes each along X, \	/ and Z axis	
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis					
SAFETY AND	AGENCY APPROVAL						1 3rd, Complies with DEN-	AN, IEC60601-1-2 4th Ed
NOISE	CONDUCTED NOISE					2-B, EN55011-B, E	N55022-B	
REGULATIONS	HARMONIC ATTENU			C61000-3-2 (clas			·	
OTHERS	CASE SIZE/WEIGHT			nm [3.0×1.4×5.0 i				
O.HEHO	COOLING METHOD		Convection, Forced air (Require external fan), Conduction cooling					

- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).


 *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Derating is required.
- *4 Please contact us about dynamic load and input response.

- *5 Please contact us about another class.
- *6 Specification is changed at option, refer to Instruction Manual.
- *7 Applicable when AUX and remote control (optional) is added.
- * To meet the specifications. Do not operate over-loaded condition.
- * Sound noise may be generated by power supply in case of pulse load.
- Parallel operation is available with -P option. Refer to 5.1on the instruction manual.
 Forced air cooling is required to output up to MAX OUTPUT WATTAGE.
- * Forced air cooling is required to outp




- · Wattage 500W max
- · High Power density:24.1W/inch3
- · High efficiency 92% typ (Input Voltage 230V,Output Voltage 24V)
- · Conduction cooling
- 3 " × 5 "standard footprint
- · Fits 1U applications
- Industrial and Medical safety approvals
- · Low leakage current
- · With Remote On/Off (Optional)
- · With AUX1 (12V), AUX2 (5V) (Optional)
- · No minimum load is required

Block diagram

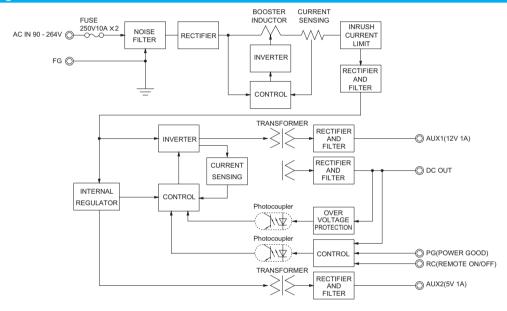

External view

*External size of option J3 is different from standard model and refer to 5 Option and Others of instruction manual for details.

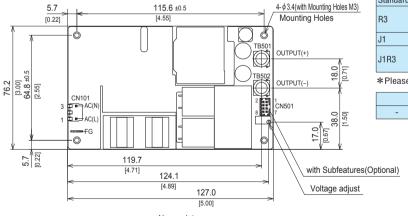

	INall	ie piate	
35	COŞEL		16.5 [0.65] 24.5 [0.96]

- X Tolerance ±1 [±0.04]
- Weight: 420g max
- X There is a total of four attachment holesX Base Plate : Aluminum
- ※ Dimensions in mm, []=inches
- Screw tightening torque: (TB501, 502): 1.5N · m max
 Mounting toque: 0.6N · m max
- Avoid contact between TB501 and 502 wiring with mounting parts.
- ※ Option: -J1: (J.S.T) connector type. Refer to Instruction Manual 5.

Mating Connector Terminal Mfr connector Standard CN101 08-50-0105 A-41671-A03A197-2 09-50-8031 08-65-0114 CN101 Molex * 50394-8051 CN501 087831-0820 51110-0851 CN101 B2P3-VH VHR-3N SVH-21T-P1.1 CN101 J.S.T. CN501 B8B-PHDSS PHDR-08VS SPHD-002T-P0.5

*Please note the pin position No.1 is different from Molex.

FG		Mating connector	Terminal	Mfr	
-	250 Series	-	170603-2	Tyco Electronics	

<Pin Assignments>

<CN101>

Pin No.	Input
1	AC(L)
2	
3	AC(N)

<CN501(Optional)>

Pin No.	Function
1	AUX1 : AUX1 (12V1A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)




CN501

GHA300F-SNF

A 300



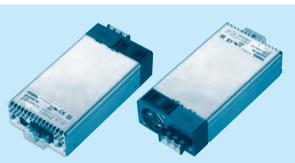

Example recommended EMI/EMC filter EAC-10-472

High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- 1) Series name 2) Single output 3) Output wattage 4) Universal input 5) Output voltage
- ®Optional *6 J1: CN501 PH(J.S.T.)connector type

Refer to the instruction manual

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL		GHA300F-12-SNF	GHA300F-24-SNF	GHA300F-48-SNF	
MAX OUTPUT WATTAGE[W]		300	300	302.4	
DC OUTPUT	Forced air +50°C	12V 25.0A	24V 12.5A	48V 6.3A	

	MODEL		GHA300F-12-SNF	GHA300F-24-SNF	GHA300F-48-SNF			
	VOLTAGE[V]		AC90 - 264 1 φ (output derating is required at AC90V -115V *3)					
	CURRENT[A]	ACIN 120V	3.3typ					
	CONNENT[A]	ACIN 230V	1.8typ					
	FREQUENCY[Hz]		50 / 60 (47 - 63)					
	EFFICIENCY[%]	ACIN 120V	88typ	89typ	89typ			
NPUT	EFFICIENCY[%]	ACIN 230V	90typ	91typ	91typ			
	POWER FACTOR	ACIN 120V	0.95typ					
	(lo=100%)	ACIN 230V	0.90typ					
	INRUSH CURRENT[A]		20typ (Io=100%) (At cold start) (Table 20typ (Io=100%)	a=25℃)				
Ĺ	INNOSTI CONNENT[A]	ACIN 230V	40typ (Io=100%) (At cold start) (Table 100%)					
	LEAKAGE CURREN	Γ[mA]	0.125/0.250max (ACIN 120V/240V 60Hz,Io=100%, According to IEC60601-1)					
	VOLTAGE[V]		12	24	48			
		Forced air		12.5	6.3			
[LINE REGULATION[48max	96max	192max			
	LOAD REGULATION			150max	240max			
	RIPPLE[mVp-p] *1		240max	240max	300max			
	rr[320max	320max	400max			
	RIPPLE NOISE[mVp-p]*1		300max	300max	480max			
DUTPUT	RIPPLE NOISE[IIIVP-P]*		360max	360max	500max			
	TEMPERATURE REGULATION[mV]		120max	240max	480max			
			150max	290max	600max			
	DRIFT[mV] *2		10111011	96max	192max			
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)					
	HOLD-UP TIME[ms]		16typ (ACIN 120V, Io=100%)					
	OUTPUT VOLTAGE ADJUSTMENT		10.80 to 13.20	21.60 to 26.40	43.20 to 52.80			
	OUTPUT VOLTAGE SETTING[V]		12.00 to 12.48	24.00 to 24.96	48.00 to 49.92			
	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically *7					
ROTECTION	OVERVOLTAGE PROTECTION[V]		13.80 to 16.80	27.60 to 33.60	55.20 to 67.20			
AIDCHIT AND	AUX1		10V 0.5A					
THERE	AUX2		5V 1A					
	REMOTE ON/OFF		Possible, AUX2 is available					
	PowerGood		Open corrector					
	INPUT-OUTPUT · RC	AUX	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 2MOPP					
SOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 1MOPP					
	OUTPUT · RC · AUX-	FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)					
	OUTPUT-RC · AUX		AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)					
	OPERATING TEMP., HUMID. AND							
	STORAGE TEMP., HUMID. AND	ALTITUDE	-30 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max					
-	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis					
	IMPACT		196.1m/s ² (20G), 11ms, once each X, Y and Z axis					
AFETY AND	AGENCY APPROVAL	s	UL60950-1, ANSI/AAMI ES60601-1, C-UL(CSA60950-1, CAN/CSA60601-1), EN60950-1, EN60601-1 3rd,					
IOISE			Complies with DEN-AN, IEC60601-1-2 4th Ed. Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B					
REGULATIONS	CONDUCTED NOISE				:N55U2Z-B			
	HARMONIC ATTENU		Complies with IEC61000-3-2 (class					
DIHERS -	CASE SIZE/WEIGHT			6.5 inches] (W×H×D) / 620g max				
	COOLING METHOD		Forced air					


- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with
- the input voltage held constant at the rated input/output. *3 Derating is required. *4 Please contact us about dynamic load and input response

- Please contact us about another class.
- *6 Specification is changed at option, refer to Instruction Manual.
- *7 When output current more than rated, output will shut down after 5 seconds or more, Recycle input after 3 minutes to reset the protection.
- To meet the specifications. Do not operate over-loaded condition. Sound noise may be generated by power supply in case of pulse load.




- · Full packaged desin united with GHA's features and additional robastness..
- · High efficiency 91% typ (Input voltage 230V,Output voltage 24V)
- · Optical for 1U applications
- · Medical and Industrial safety approvals
- · Low leakage current
- · Conformal coating
- · Single remote ON/OFF control for DC output, AUX1 and Fan.
- · Isolated dual AUX (AUX1 10V 0.5A, AUX2 5V 1A)

Block diagram

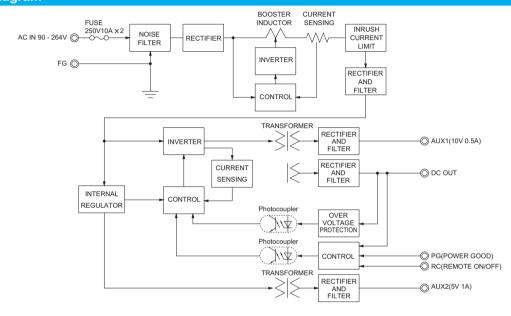

External view

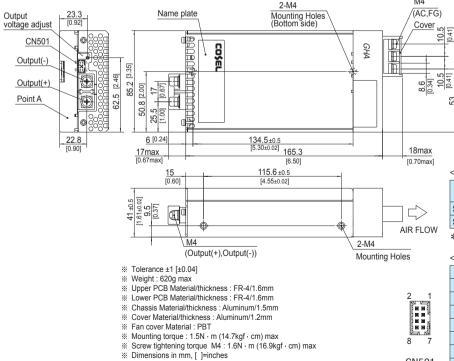

<CN501 mating connector and terminal>

FG

AC(N)

AC(L)

Co	nnector	Mating connector	Terminal	Mfr
SNF	087833-6320	51110-0851	50394-8051	Molex *
SNFJ1	S8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	J.S.T.

*Please note the pin position No.1 is different from Molex.

<CN501>

Pin No.	Function
1	AUX1 : AUX1 (10V0.5A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)

M4

GHA500F-SNF

A 500







High voltage pulse noise type : EAP series Low leakage current type : EAM series

*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

1) Series name
2) Single output
3) Output wattage
4) Universal input
5) Output voltage

®Optional *6 J1: CN501

PH(J.S.T.)connector type P : Parallel Operation

Refer to the instruction manual

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL		GHA500F-12-SNF	GHA500F-15-SNF	GHA500F-24-SNF	GHA500F-30-SNF	GHA500F-48-SNF	GHA500F-56-SNF
MAX OUTPUT WATTAGE[W]		450	501	504	501	504	504
DC OUTPUT	Forced air +50°C	12V 37.5A	15V 33.4A	24V 21.0A	30V 16.7A	48V 10.5A	56V 9.0A

	MODEL		GHA500F-12-SNF	GHA500F-15-SNF	GHA500F-24-SNF	GHA500F-30-SNF	GHA500F-48-SNF	GHA500F-56-SNF	
	VOLTAGE[V]		AC90 - 264 1 φ (output derating is r	equired at AC90V -	115V *3)			
	CURRENT[A] ACIN 120V		4.8typ 5.4typ						
	CONNENT[A]	ACIN 230V	2.6typ 2.9typ						
	FREQUENCY[Hz]		50 / 60 (47 - 63)						
		ACIN 120V	87typ	89typ	89typ	89typ	89typ	89typ	
INPUT		ACIN 230V	89typ	91typ	91typ	91typ	91typ	91typ	
	POWER FACTOR	ACIN 120V	0.95typ						
	(lo=100%)	ACIN 230V	0.90typ						
	INRUSH CURRENT[A]		20typ (Io=100%)	(At cold start) (Ta	a=25°C)				
	INNUSH CONNENT[A]	ACIN 230V	40typ (Io=100%)	(At cold start) (Ta	a=25°C)				
	LEAKAGE CURREN	T[mA]	0.125/0.250max (ACIN 120V/240V 60Hz,Io=100%, According to IEC60601-1)						
	VOLTAGE[V]		12	15	24	30	48	56	
		Forced air		33.4	21.0	16.7	10.5	9.0	
	LINE REGULATION[48max	60max	96max	120max	192max	192max	
	LOAD REGULATION			120max	150max	180max	240max	240max	
	RIPPLE[mVp-p] *1		240max	240max	240max	300max	300max	400max	
	······································		320max	320max	320max	400max	400max	500max	
	RIPPLE NOISE[mVp-p]*1		300max	300max	300max	480max	480max	500max	
OUTPUT	MIFFEE NOISE[IIIVP-P]**		360max	360max	360max	500max	500max	580max	
	TEMPERATURE REGULATION[mV]		120max	150max	240max	300max	480max	480max	
			150max	180max	290max	360max	600max	600max	
			48max	60max	96max	120max	192max	192max	
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)						
	HOLD-UP TIME[ms]		16typ (ACIN 120)						
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	27.00 to 31.50	43.20 to 52.80	52.00 to 56.00	
	OUTPUT VOLTAGE SETTING[V]		12.00 to 12.48	15.00 to 15.30	24.00 to 24.96	30.00 to 31.20	48.00 to 49.92	55.00 to 56.00	
	OVERCURRENT PROT				overs automatical	,			
PROTECTION	OVERVOLTAGE PROTEC	CTION[V]	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	34.50 to 42.00	55.20 to 67.20	60.00 to 69.00	
CIRCUIT AND	AUX1		12V 0.5A						
OTHERS	AUX2		5V 1A						
	REMOTE ON/OFF		Possible, AUX2 is available						
	PowerGood		Open corrector						
	INPUT-OUTPUT · RC	AUX	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 2MOPP						
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 1MOPP						
	OUTPUT · RC · AUX-	FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)						
	OUTPUT-RC · AUX		AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)						
	OPERATING TEMP., HUMID. AND		-20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max *3						
ENVIRONMENT			-30 to +80°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max						
			10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis 196.1m/s² (20G), 11ms, once each X, Y and Z axis						
	IMPACT					1 0411/0040000	14 4) FNCOOFC 1	ENICOCO4 4 C 1	
SAFETY AND	AGENCY APPROVAL	_S			1, C-UL(CSA60950	J-1, CAN/CSA6060) I - I), EN60950-1,	EN60601-1 3rd,	
NOISE	CONDUCTED NOISE			EN-AN, IEC60601-		D ENEE011 D EN	IEEOOO D		
REGULATIONS	CONDUCTED NOISE				PR11-B, CISPR22-	-B, ENSSUTT-B, EN	100022-B		
	HARMONIC ATTENU			C61000-3-2 (class		VD\ / CCO# #5			
OTHERS	CASE SIZE/WEIGHT			IIIIII [3.35 × 1.61 ×	6.5 inches] (W×H	スロ) / bbug max			
	COOLING METHOD		Forced air						


- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
- Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with
- the input voltage held constant at the rated input/output. *3 Derating is required.
- *4 Please contact us about dynamic load and input response

- Please contact us about another class.
- Specification is changed at option, refer to Instruction Manual.
- When output current more than rated, output will shut down after 5 seconds or more, Recycle input after 3 minutes to reset the protection.
- To meet the specifications. Do not operate over-loaded condition.
- Sound noise may be generated by power supply in case of pulse load.
- Parallel operation is available with -P option. Refer to 5.1on the instruction manual.




- · Full packaged design united with GHA's features, and additional robustness..
- · High efficiency 91% typ (Input voltage 230V,Output voltage 24V)
- · 50% minimized size compares with previous products.
- · Optical for 1U applications
- · Medical and Industrial safety approvals
- · Low leakage current
- · Conformal coating
- · Single remote ON/OFF control for DC output, AUX1 and Fan.
- · Isolated dual AUX (AUX1 12V 0.5A, AUX2 5V 1A)

Block diagram

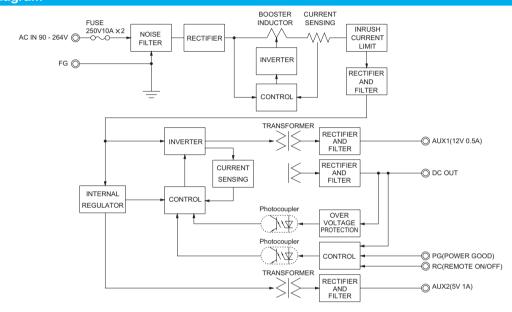

External view

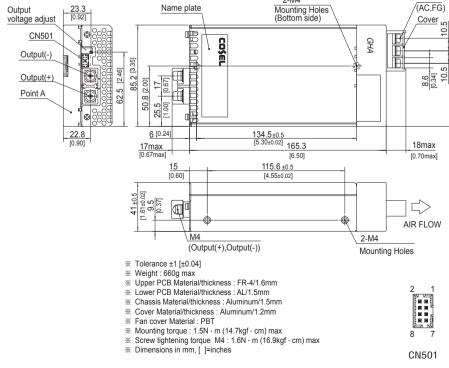



FG

AC(N)

AC(L)

Co	nnector	Mating connector	Terminal	Mfr
SNF	087833-6320	51110-0851	50394-8051	Molex *
SNFJ1	S8B-PHDSS	PHDR-08VS	SPHD-002T-P0.5	J.S.T.

*Please note the pin position No.1 is different from Molex.

<CN501>

M4

Pin No.	Function
1	AUX1 : AUX1 (12V0.5A)
2	AUX1G: AUX1 (GND)
3	RC : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

GHA500F-48-SNF GHA500F-12-SNF GHA500F-24-SNF GHA500F-15-SNF GHA500F-12-T3 GHA500F-24-R3

GHA300F-12-J1 GHA300F-48-R3 GHA500F-48-T3 GHA500F-15-T3 GHA300F-12-SNF GHA500F-15-J1 GHA500F
48-J1 GHA500F-12-P GHA500F-15-R3 GHA300F-24-SNF GHA300F-48-SNF GHA300F-24-J1 GHA300F-48-J1

GHA300F-12-T3 GHA300F-48-T3 GHA500F-12-J1 GHA300F-24-R3 GHA500F-48-P GHA500F-48-R3 GHA300F
24-T3 GHA500F-24-P GHA300F-12-R3 GHA500F-12-R3 GHA500F-15-P GHA500F-24-J1 GHA500F-24-T3