



Matching Transformers

Matching Transformers

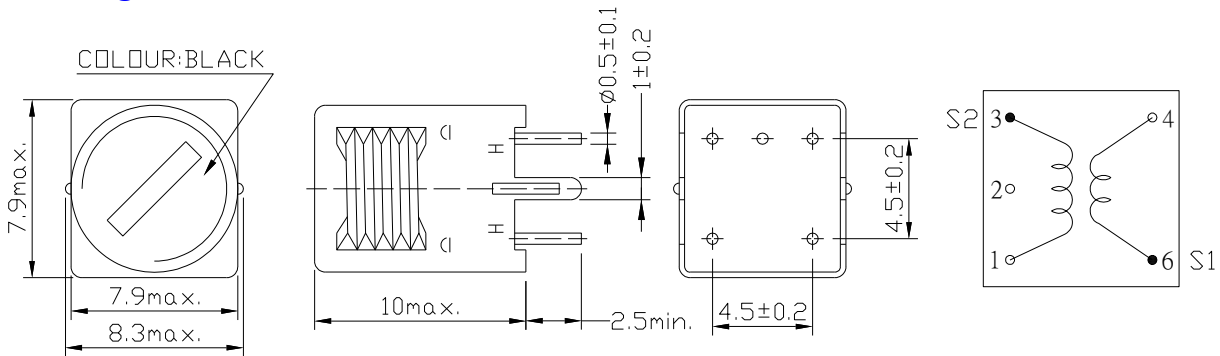

(Figure 1)

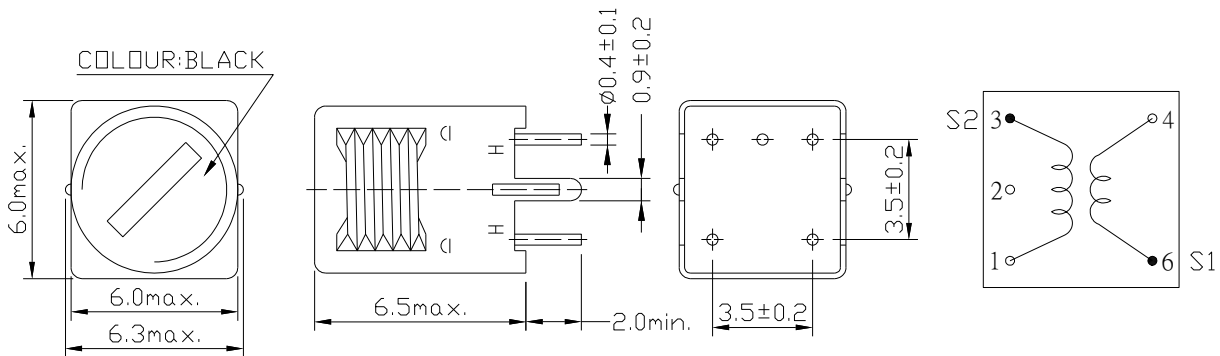

(Figure 2)

Specification

| Parts Number | K4000001 | K4000002 | K4000003 | K4000004 | K4000005 |
|----------------------------|-------------|------------|------------|------------|------------|
| Operating Frequency | 40.0 KHz | 40.0 KHz | 235.0 KHz | 40.0 KHz | 125.0 KHz |
| Variable Inductance (min.) | 10.6 mH± 6% | 5.3 mH± 6% | 1.0 mH± 6% | 6.0 mH± 6% | 1.5 mH± 6% |
| Unloaded Q (min.) | 70 | 100 | 25 | 90 | 80 |
| Turn Ratio | 1:10 | | | | 1:20 |
| Matching Transducer | 400EP14D | 400EP14D* | 235SR130 | 400EP18A | 125SR250 |
| Dimensions | Figure 1 | | Figure 2 | Figure 1 | |

*(Temperature Compensated Type)



S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pro-Wave Electronics:](#)

[K4000005](#) [K4000001](#) [K4000004](#)