




(2,00 mm) .0787"

(2,54 mm) .100"

BTMM, BSW SERIES

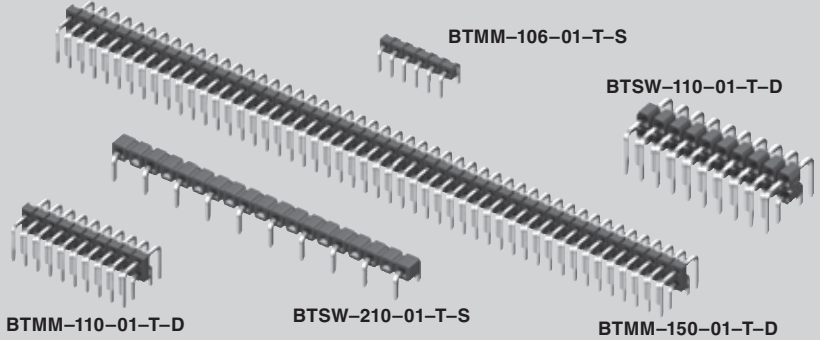

# LOW PROFILE SQUARE POST JUMPER

## SPECIFICATIONS

For complete specifications see [www.samtec.com?BTMM](http://www.samtec.com?BTMM)

**Insulator Material:**

Black Liquid Crystal Polymer

**Terminal Material:**

Phosphor Bronze

**Plating:**

Sn over 50µ" (1,27 µm) Ni

**Operating Temp Range:**


-55°C to +105°C

**RoHS Compliant:**

Yes

**Lead-Free Solderable:**

Yes

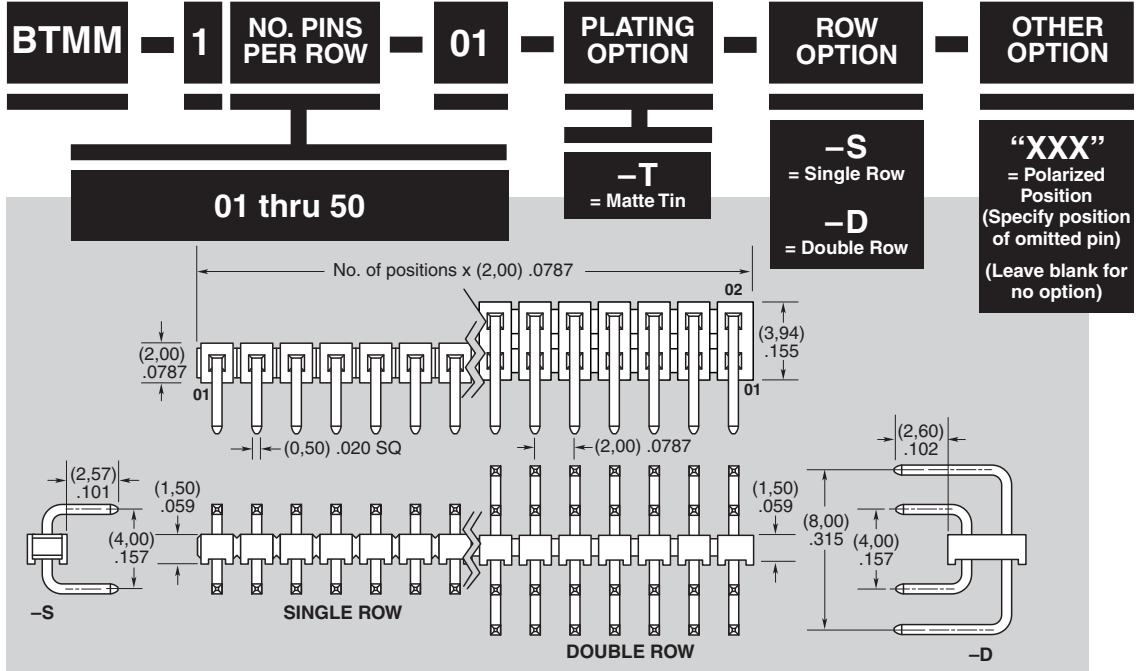

**Note:** Some sizes, styles and options are non-standard, non-returnable.

## SPECIFICATIONS

For complete specifications see [www.samtec.com?BTSW](http://www.samtec.com?BTSW)

**Insulator Material:**

Black Glass Filled Polyester

**Terminal Material:**

Phosphor Bronze

**Plating:**

Sn over 50µ" (1,27 µm) Ni

**Operating Temp Range:**


-55°C to +105°C

**RoHS Compliant:**


Yes

**Lead-Free Solderable:**

Wave Only

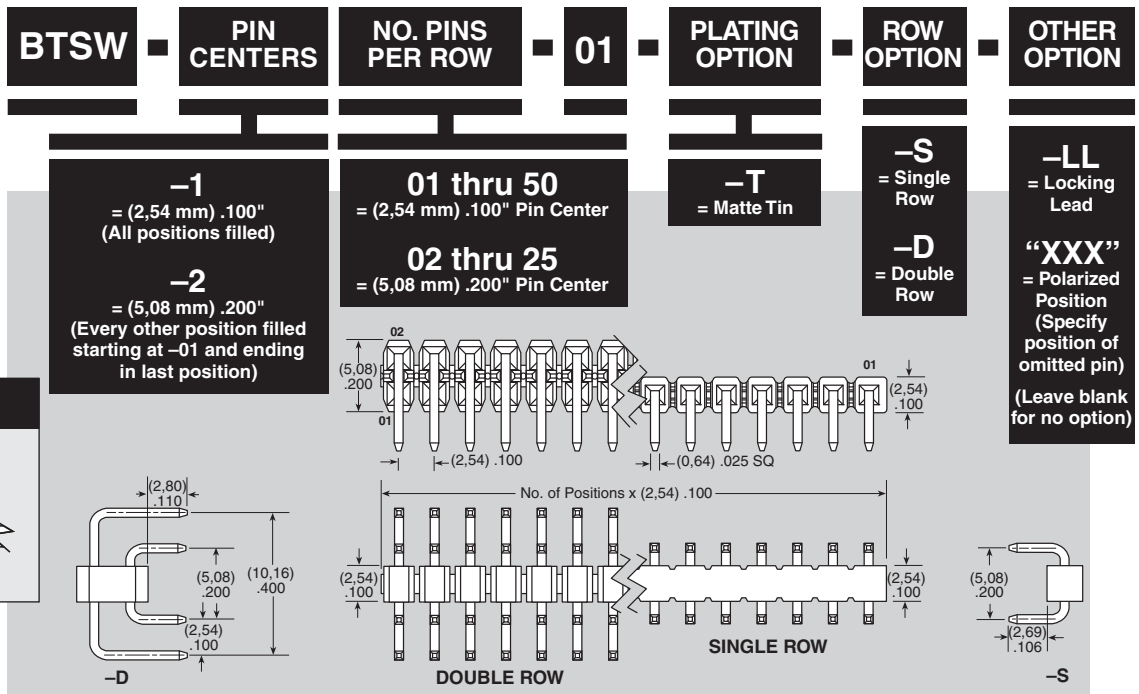

## APPLICATION



**Note:** Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329  
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0  
 SAMTEC FRANCE • Tel: 33 01 80 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292  
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766  
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Samtec:

[BTSW-102-01-T-S](#) [BTSW-104-01-T-D](#) [BTSW-105-01-T-S](#) [BTSW-108-01-T-S](#) [BTSW-110-01-T-D](#) [BTSW-120-01-T-S](#)  
[BTSW-107-01-F-S](#) [BTSW-150-01-T-D](#) [BTSW-150-01-T-S](#) [BTSW-112-01-T-D](#) [BTSW-204-01-T-S](#) [BTSW-101-01-T-](#)  
[S-LL](#) [BTSW-103-01-T-D](#) [BTSW-104-01-F-S](#) [BTSW-115-01-T-S](#) [BTSW-207-01-T-S-LL](#) [BTSW-110-01-T-S](#) [BTSW-](#)  
[115-01-F-D](#) [BTSW-115-01-T-D-LL](#) [BTSW-150-01-T-D-LL](#) [BTSW-202-01-F-S](#) [BTSW-212-01-T-S](#) [BTSW-106-01-T-D](#)  
[BTSW-108-01-T-D](#) [BTSW-110-01-F-D](#) [BTSW-110-01-T-S-004](#) [BTSW-106-01-T-S](#) [BTSW-107-01-T-D](#) [BTSW-104-01-](#)  
[T-S](#) [BTSW-120-01-T-D](#) [BTSW-118-01-T-S](#) [BTSW-103-01-F-S-LL](#) [BTSW-103-01-T-S](#) [BTSW-112-01-T-S](#) [BTSW-115-](#)  
[01-T-D](#) [BTSW-150-01-F-S](#) [BTSW-101-01-F-S](#) [BTSW-150-01-F-D](#) [BTSW-107-01-T-S](#) [BTSW-205-01-T-S](#) [BTSW-101-](#)  
[01-T-S](#) [BTSW-103-01-F-S](#) [BTSW-105-01-T-D](#) [BTSW-108-01-F-D](#) [BTSW-125-01-T-D](#) [BTSW-130-01-T-D](#) [BTSW-208-](#)  
[01-T-D](#)