



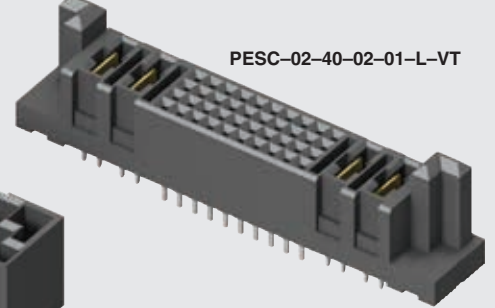

**POWER STRIP 40**

PESC-02-40-02-01-L-VT

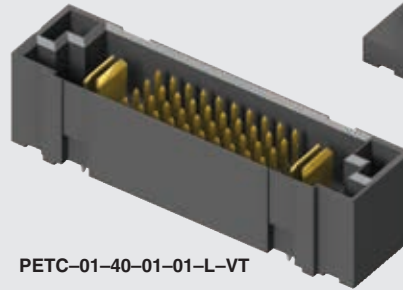

(6.35 mm) .250" (PWR) (2.54 mm) .100" (SIG)

PETC-01-40-01-01-L-VT



PETC, PESC SERIES

# 40 A SIGNAL/POWER COMBO SYSTEM

**SPECIFICATIONS**

For complete specifications see [www.samtec.com?PETC](http://www.samtec.com?PETC) or [www.samtec.com?PESC](http://www.samtec.com?PESC)

- Insulator Material:** Black LCP
- Terminal Material:** Copper Alloy
- Plating:** Sn or Au over 50 μ" (1.27 μm) Ni
- Current Rating (Signal Pin):** 5.7 A per pin (4 pins powered)
- Insertion Depth (Power Pin):** (5.00 mm) .197" to (8.46 mm) .333"
- Wiping Distance:** Signal: (1.5 mm) .059" Max Power: (4.14 mm) .163" Max
- Operating Temp Range:** -55 °C to +125 °C for Au -55 °C to +105 °C for Sn
- Voltage Rating:** Signal: 450 VAC/636 VDC Power: 650 VAC/919 VDC
- Standard Creepage:** (3.66 mm) .144" (power)
- Standard Clearance:** (3.31 mm) .130" (power)
- RoHS Compliant:** Yes
- Lead-Free Solderable:** Yes

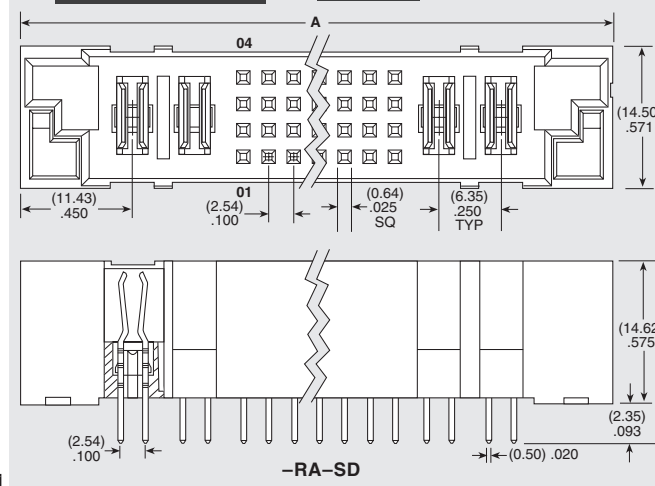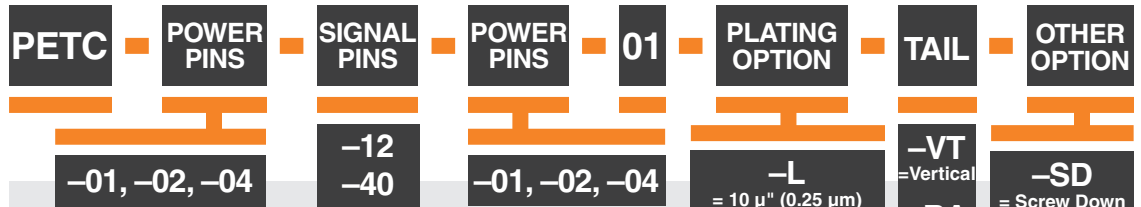

POWER PINS/END	A	
	12 SIGNAL PINS	40 SIGNAL PINS
-01	(39.37) 1.550	(57.15) 2.250
-02	(52.07) 2.050	(69.85) 2.750
-04	(77.47) 3.050	(95.25) 3.750

**CREEPAGE AND CLEARANCE**

Selectively loading contacts achieves customer specific creepage and clearance requirements.  
Contact [asp@samtec.com](mailto:asp@samtec.com)

PETC/PESC	
POWER PINS	CURRENT RATING (PER CONTACT)
1	31.4 A
2	28.0 A
3	24.4 A
4	22.9 A

**RECOGNITIONS**



For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



**ALSO AVAILABLE (MOQ Required)**

- Other signal pins
- Power pins
- Asymmetric power pin placement
- Other platings

**Notes:**  
The number of power pins on each end must equal.  
Some sizes, styles and options are non-standard, non-returnable.

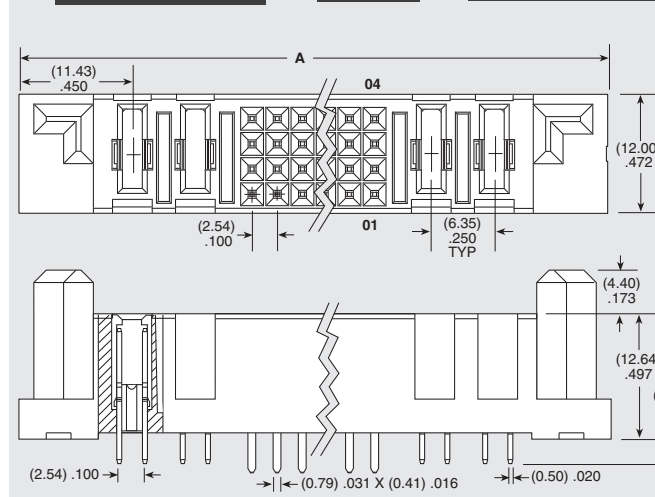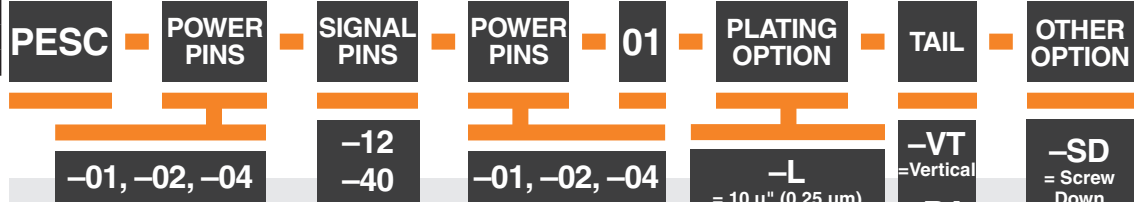

POWER PINS/END	A	
	12 SIGNAL PINS	40 SIGNAL PINS
-01	(39.37) 1.550	(57.15) 2.250
-02	(52.07) 2.050	(69.85) 2.750
-04	(77.47) 3.050	(95.25) 3.750

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Samtec:

[PESC-04-12-04-01-L-VT](#) [PESC-02-40-02-01-L-VT](#) [PESC-02-12-02-01-L-VT](#) [PESC-04-40-04-01-L-VT](#) [PESC-02-40-02-01-S-VT-LC](#) [PESC-02-40-02-01-L-VT-LC](#) [PESC-04-40-04-01-S-VT-LC](#) [PESC-01-40-01-01-S-VT](#) [PESC-02-12-02-01-T-RA](#) [PESC-04-40-04-01-S-VT](#) [PESC-01-40-01-01-S-VT-LC](#) [PESC-01-40-01-01-T-VT](#) [PESC-02-40-02-01-S-VT](#) [PESC-04-40-04-01-T-VT](#) [PESC-01-40-01-01-T-VT-LC](#) [PESC-04-40-04-01-T-VT-LC](#) [PESC-02-40-02-01-T-VT](#) [PESC-02-40-02-01-T-VT-LC](#) [PESC-01-12-01-01-S-VT-LC](#) [PESC-02-12-02-01-S-RA-LC](#) [PESC-02-12-02-01-S-RA-SD](#) [PESC-01-12-01-01-S-RA-LC](#) [PESC-01-12-01-01-S-VT](#) [PESC-02-12-02-01-L-VT-LC](#) [PESC-04-12-04-01-L-RA-SD](#) [PESC-04-12-04-01-S-RA-LC](#) [PESC-01-12-01-01-T-RA-LC](#) [PESC-01-12-01-01-T-VT](#) [PESC-02-12-02-01-L-RA-LC](#) [PESC-04-12-04-01-L-RA](#) [PESC-01-12-01-01-L-RA-SD](#) [PESC-01-12-01-01-T-RA-SD](#) [PESC-02-12-02-01-T-RA-LC](#) [PESC-04-40-04-01-L-VT-LC](#) [PESC-04-40-04-01-S-RA-LC](#) [PESC-01-40-01-01-L-RA](#) [PESC-01-40-01-01-S-RA-LC](#) [PESC-02-12-02-01-L-RA](#) [PESC-02-12-02-01-S-VT](#) [PESC-01-12-01-01-L-VT](#) [PESC-01-40-01-01-S-RA-SD](#) [PESC-02-12-02-01-S-VT-LC](#) [PESC-04-12-04-01-S-VT](#) [PESC-04-40-04-01-S-RA-SD](#) [PESC-01-40-01-01-L-RA-SD](#) [PESC-04-12-04-01-T-VT](#) [PESC-01-40-01-01-L-RA-LC](#) [PESC-01-40-01-01-L-VT](#) [PESC-02-40-02-01-L-RA](#) [PESC-02-40-02-01-L-RA-LC](#) [PESC-01-40-01-01-L-VT-LC](#) [PESC-02-40-02-01-L-RA-SD](#) [PESC-04-12-04-01-T-RA-SD](#) [PESC-04-12-04-01-T-VT-LC](#) [PESC-04-40-04-01-L-RA-SD](#) [PESC-02-12-02-01-T-VT](#) [PESC-04-12-04-01-T-RA-LC](#) [PESC-04-40-04-01-S-RA](#) [PESC-01-12-01-01-L-VT-LC](#) [PESC-02-12-02-01-L-RA-SD](#) [PESC-04-12-04-01-L-VT-LC](#) [PESC-04-40-04-01-T-RA](#) [PESC-02-40-02-01-T-RA-SD](#) [PESC-04-12-04-01-L-RA-LC](#) [PESC-04-12-04-01-S-RA-SD](#) [PESC-04-12-04-01-S-VT-LC](#)