

Ribbon Cable Cutter Tool **Specification Sheet** Order No. 63817-0100



FEATURES

- Clean undistorted cuts, up to 64 conductors
- Ergonomic soft grip handles for comfortable operation
- Locking lever
- Tool frame made of high tempered steel
- Hardened steel cutting blades
- Exchangeable blade and anvil
- Build-in guide assures users of a true square cut


DESCRIPTION:

This ribbon cable cutter is designed for cutting 64 conductors, up to 81.5mm (3.21") and 20 AWG (0.5mm²) maximum wire diameter.



WARNING:

Do not cut live circuits! This sign specifies danger of electric shock. Failure to observe can result in danger to life and limb.

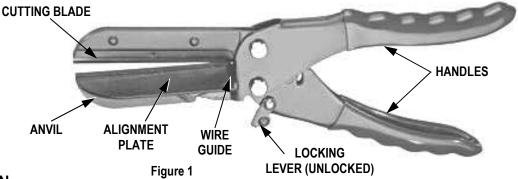

OPERATION

WARNING: Make sure that the cable is <u>Disconnected</u> from any power supply and does not contain any steel strands.

- 1. Using your right hand, hold the cutting tool with the cable alignment plate on the left side.
- 2. Unlock the locking lever.
- 3. With your left hand, insert the proper length of cable under the cutting blade.
- 4. Place the cable edge against the wire guide of the alignment plate edge to ensure a proper square cut.


CAUTION: Always keep hands and fingers out of the cutting area!

UNCONTROLLED COPY Doc No: ATS-638170100 Release Date: 08-24-09 Page 1 of 2 Revision Date: 08-24-09

Revision: A

- 5. Squeeze the tool handles until the cut has been completed.
- 6. Release the handles to open the jaws.
- 7. The cable is now ready for assembling.

Never use force! There is danger in damaging this tool.

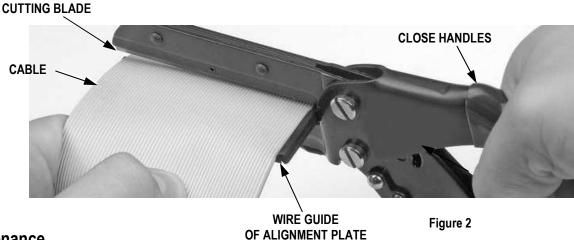

Maintenance

It is recommended that each operator of the tool be made aware of, and responsible for, the following maintenance steps:

- 1. Remove dust, moisture, and other debris with a clean brush, or soft, lint free cloth.
- 2. Do not use any abrasive materials that could damage the tool.
- 3. Make certain all movable parts such as bolt joints and the ratchet mechanism are oiled regularly. Light oil (such as SAE30W oil) applied at the oil points.
- 4. Make sure the cutting area is cleaned of debris.
- 5. When tool is not in use store the tool in a clean, dry area.

Replacement parts:

63817-0170 Cutting Blade

63817-0171 Anvil

Warranty

This tool is for cutting electrical cable only. All tools are warranted to be free of manufacturing defects for a period of 30 days. Should such a defect occur, the tool will be exchanged free of charge. This exchange will not be applicable to altered, misused, or damaged tools. This tool is designed for hand use only. Any clamping, fixturing, or use of handle extensions voids this warranty.

Americas Headquarters Lisle, Illinois 60532 U.S.A. 1-800-78MOLEX amerinfo@molex.com Far East North Headquarters Yamato, Kanagawa, Japan 81-462-65-2324 feninfo@molex.com Far East South Headquarters
Jurong, Singapore
65-6-268-6868
fesinfo@molex.com

European Headquarters Munich, Germany 49-89-413092-0 eurinfo@molex.com Corporate Headquarters 2222 Wellington Ct. Lisle, IL 60532 U.S.A. 630-969-4550 Fax: 630-969-1352

Visit our Web site at http://www.molex.com

Doc No: ATS-638170100 Release Date: 08-24-09 **UNCONTROLLED COPY** Page 2 of 2 Revision: A Revision Date: 08-24-09

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

63817-0170