


8			7					
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION			20		
(C) COPYRIGHT 20			BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.					
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION		
1852431-1		A	122500-1	LEADMAKER	AIR FEED	CUTS CARRIER		
1852431-2		A	565435-5	BENCH MODEL K	AIR FEED	CUTS CARRIER		
1852431-3		A	354500-1	BENCH MODEL G	AIR FEED	CUTS CARRIER		
1852431-6		A	122500-1	LEADMAKER	AIR FEED	CONTINUOUS CARRIER		
7-1852431-7		A	-	-	-	SPARE PARTS		

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

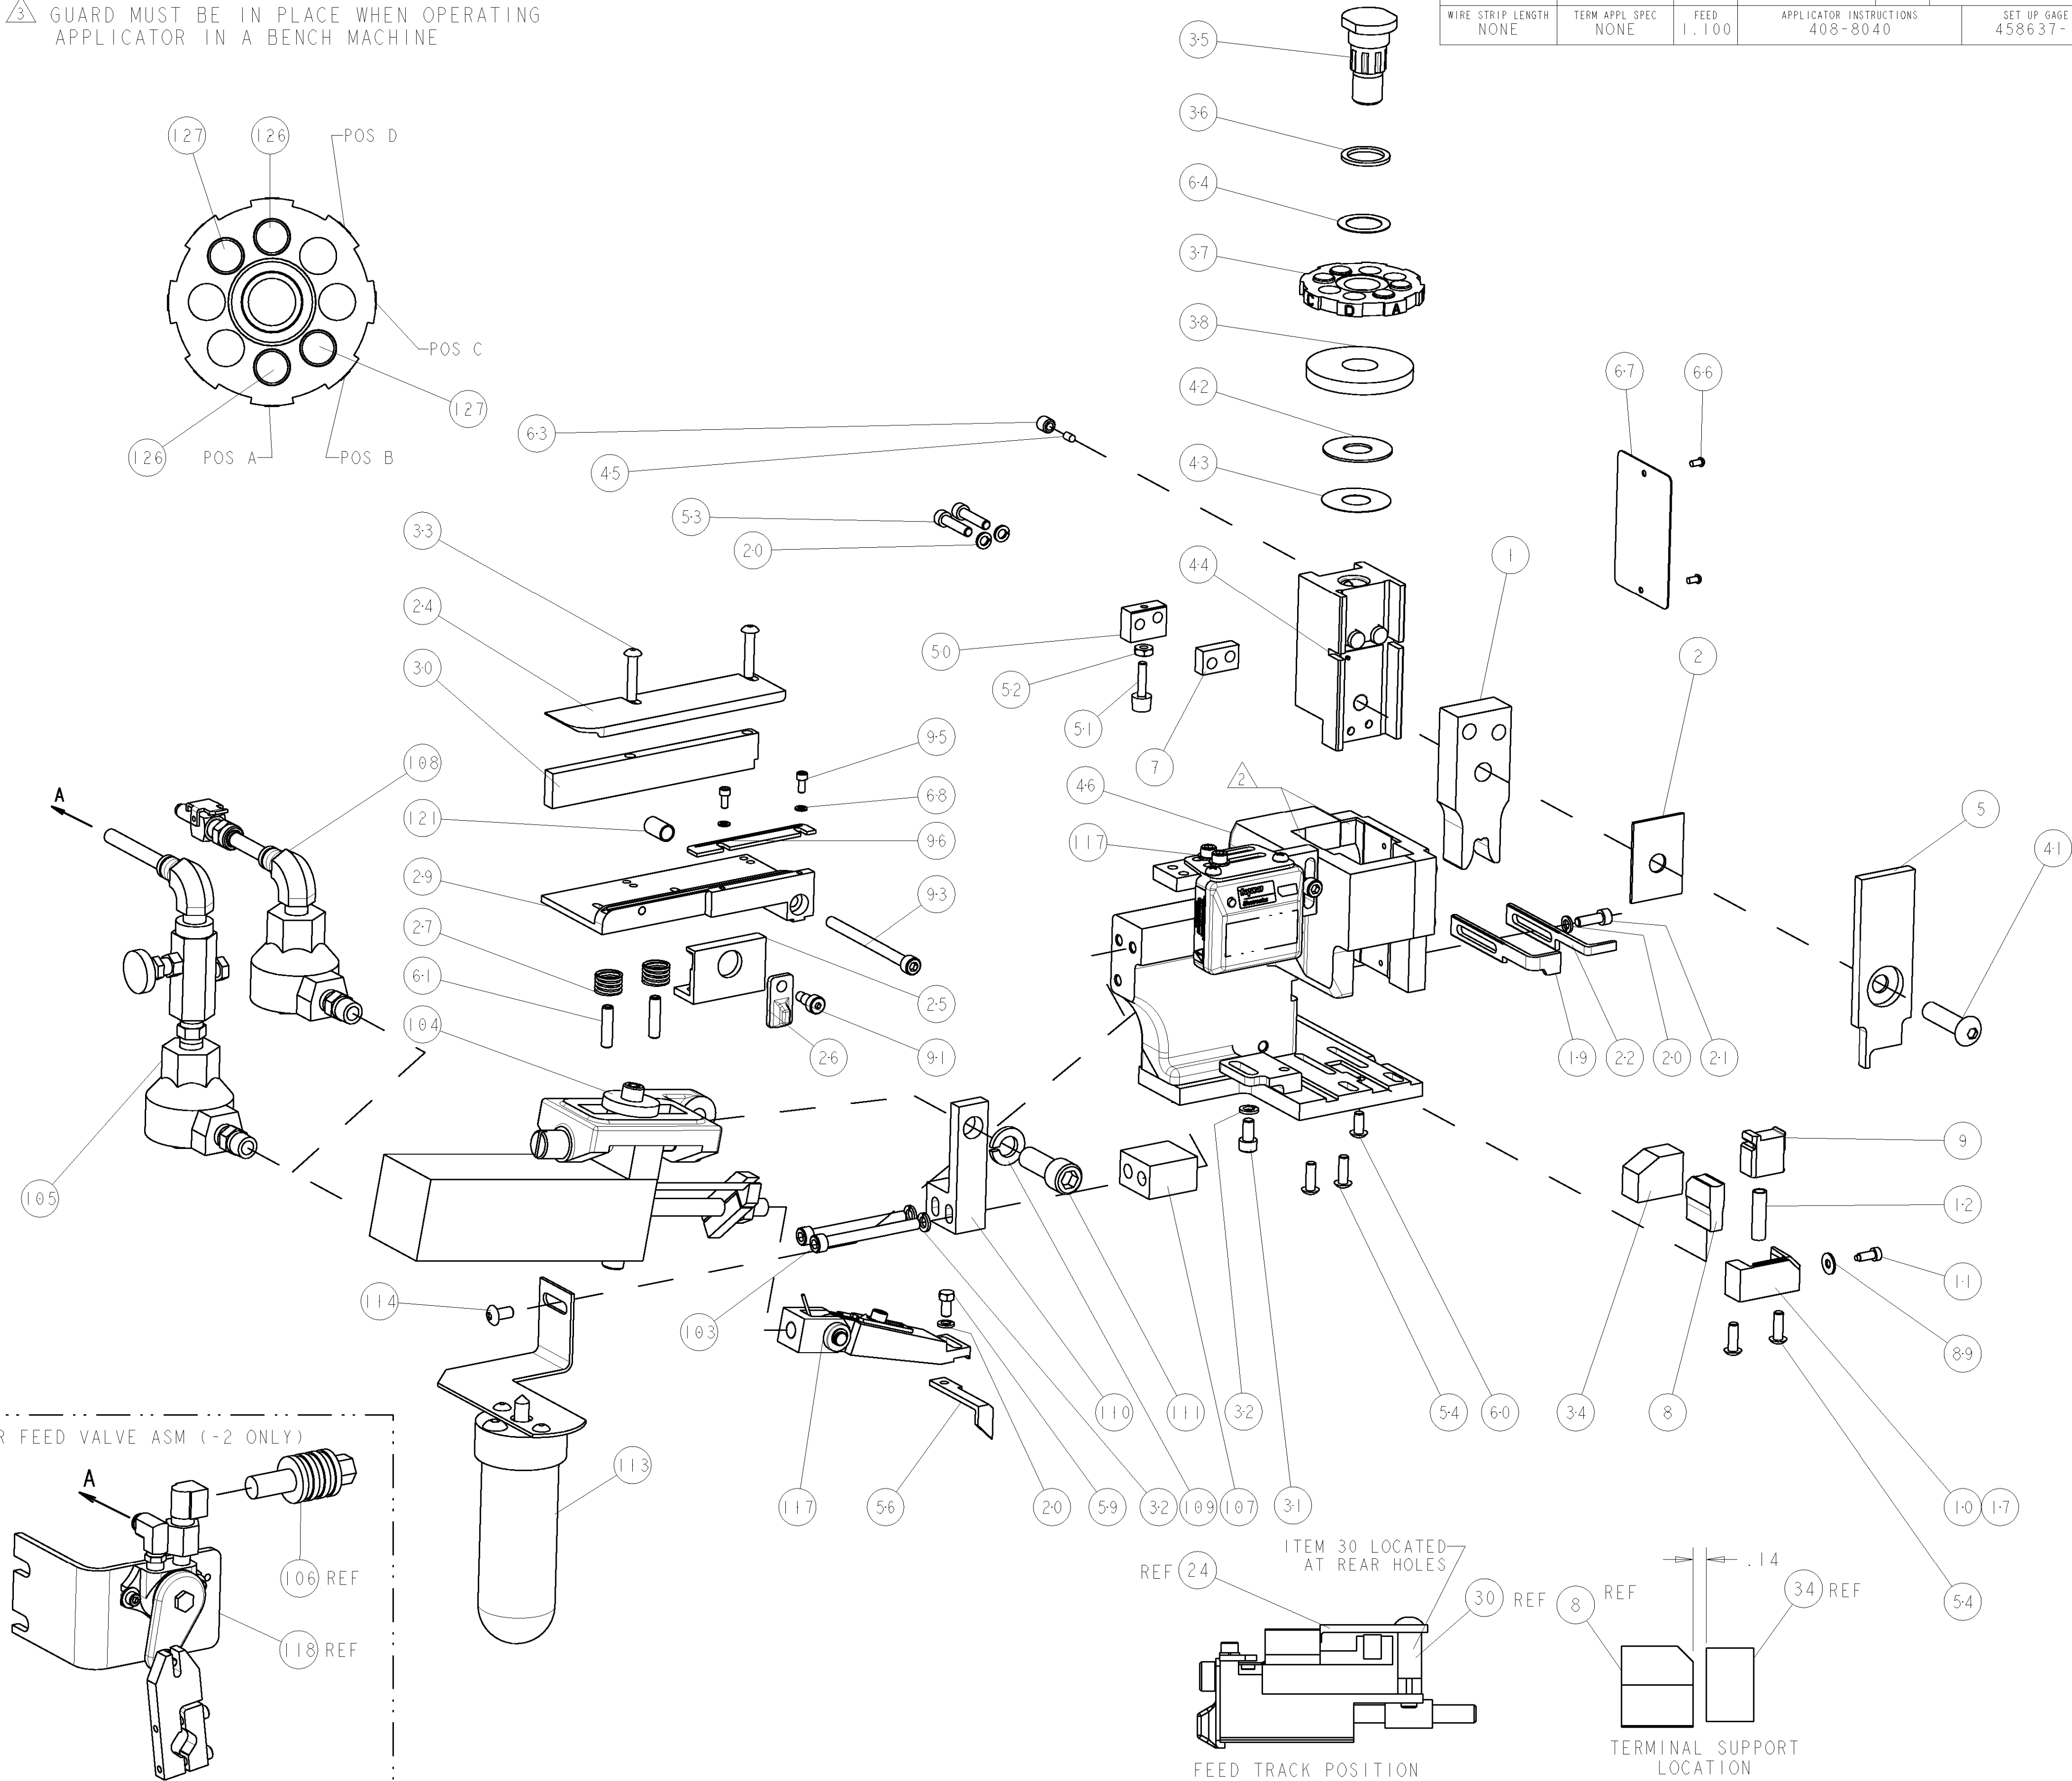

TERMINAL NAME: SPARK PLUG, SP-98-SS					
TYCO PN	ETCO PN	ETCO TERMINAL - TYCO CRIMP SPECS			
1949277	15117				
-	-	PAD LTR	INSULATION CRIMP HEIGHT	WIRE SIZE	
-	-	A	.295±.005 [7.49±0.13mm]	Ø 8mm	
-	-	B	.281±.005 [7.14±0.13mm]	Ø 7mm	
-	-	C	-	-	
-	-	D	-	-	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	.300 [7.62mm]	F	Ø 7-8mm
-	-	INSUL	-	-	-
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPLICATOR INSTRUCTIONS		SET UP GAGE
NONE	NONE	1.100	408-8040		458637-1

LOC		DIST		REVISONS							
A	66	P	LTR	DESCRIPTION				DATE	DWN	APVD	
		A		RELEASED				24MAR2007	RK	TE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852431-3](#)