


610/620-Series

SMALL-SIZED ROCKER SWITCHES

The 610/620-Series switches are double insulated and available in single or double pole configurations. These snap-in mounted switches are offered with either a paddle or rocker actuator and with ratings up to 8 amps.

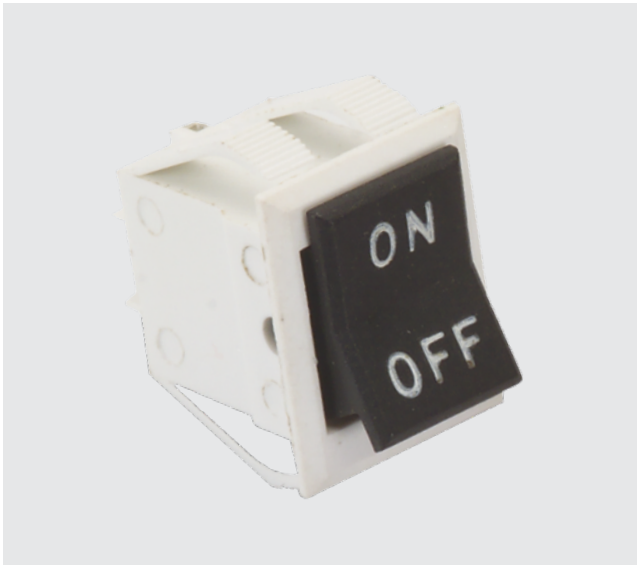

Product Highlights:

- Single or double pole
- Paddle rocker actuator options
- Snap-In mounting method

Typical Applications:

- Handheld Appliance
- Audio-Visual
- Power Supplies
- Computers



Carling Technologies®
Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: 860.793.9281 Fax: 860.793.9231

www.carlingtech.com

Dielectric Strength

UL/CSA:
1000V - live to dead metal parts
& opposite polarity

Electrical Life

50,000 cycles- single pole
50,000 cycles- double pole

Operating Temperature

32°F to 185°F (0°C to 85°C)

62012421 - **0** - **0**

¹
Base Part Number

²
Terminal
Sealing

³
Legend

1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING ¹ / TERMINATION ¹

4A 250VAC; 8A 125VAC
Single Pole

	Solder Lugs	PC Term
On-none-On	62011421	62011422
On-none-(On)	62011431	62011432
On-off-On	62011461	62011462
On-off-(On)	62011471	62011472
(On)-off-(On)	62011481	62011482
Double Pole		
On-none-On	62012421	62012422
On-none-(On)	62012431	62012432
On-off-On	62012461	62012462
On-off-(On)	62012471	62012472
(On)-off-(On)	62012481	62012482

2 TERMINAL SEALING

0 None
E Epoxy sealed terminals


3 LEGEND

NO LEGEND hot stamp
On-OFF vertical **0**
On-OFF horizontal **A**
I-O horizontal **B**
I-O vertical **D**
G



Notes:

¹ Base part number specifies black rocker and bezel. To specify paddle actuator, change 2nd digit of part number from 2 to 1 (ex. 61012421) For additional ratings and colors, consult factory.

() indicates momentary function.

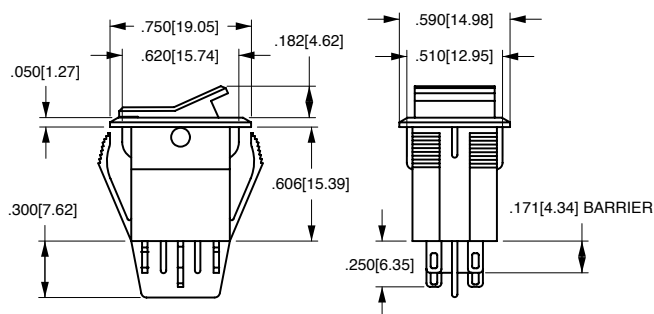

PC TERMINAL	.080 SOLDER LUG
TERMINAL TYPE	



*Manufacturer reserves the right to change product specification without prior notice.

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications

Worldwide Headquarters

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Phone: 860.793.9281 **Fax:** 860.793.9231
Email: sales@carlingtech.com

Northern Region Sales Office: nrsm@carlingtech.com
Southeast Region Sales Office: sersm@carlingtech.com
Midwest Region Sales Office: mrsm@carlingtech.com
West Region Sales Office: wrsm@carlingtech.com
Latin America Sales Office: larsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific Ltd.,
Suite 1607, 16/F Tower 2, The Gateway,
Harbour City, 25 Canton Road,
Tsimshatsui, Kowloon, Hong Kong
Phone: Int + 852-2737-2277 **Fax:** Int + 852-2736-9332
Email: sales@carlingtech.com.hk

Shenzhen, China: shenzhen@carlingtech.com
Shanghai, China: shanghai@carlingtech.com
Pune, India: india@carlingtech.com
Kaohsiung, Taiwan: taiwan@carlingtech.com
Yokohama, Japan: japan@carlingtech.com

Europe | Middle East | Africa Headquarters

Carling Technologies LTD
4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK
Phone: Int + 44 1392.364422 **Fax:** Int + 44 1392.364477
Email: ltd.sales@carlingtech.com

Germany: gmbh@carlingtech.com
France: sas@carlingtech.com



Carling Technologies®

Innovative Designs. Powerful Solutions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Carling Technologies:

[61012481-0-0](#) [62011481-0-0](#) [62011482-0-0](#) [62012421-0-0](#) [62021421-0-0](#) [62022421-0-0](#) [61031231EO](#) [61011471-0-0](#) [62012431-0-0](#) [61011481-0-0](#) [62012421-0-A](#) [62012462-0-0](#) [62012471-0-0](#) [62012481-0-0](#) [62012482-0-0](#) [62032461-0-0](#) [62051481-0-0](#) [62011471-0-0](#) [62012221-0-0](#) [62012422-0-0](#) [62012461-0-0](#) [61012421-0-0](#) [62011421-0-0](#) [62011421-0-A](#) [62011431-0-0](#) [62011461-0-0](#) [62011462-0-0](#) [62011281-0-0](#) [62052481-0-0](#) [61016281-0-0](#) [62022131-0-0](#) [62011171-0-0](#) [61012162-0-0](#) [61042421-0-0](#) [61021421-0-0](#) [62035221-0-0](#) [62021421-0-A](#) [62015481-0-0](#) [61022421-0-0](#) [62021431-0-0](#) [61021481-0-0](#) [62022481-0-0](#) [61011181-0-0](#) [62016421-0-0](#) [62042461-0-0](#) [62015461-E-0](#) [62015431-0-0](#) [61021461-0-0](#) [62035421-0-0](#) [62036431-0-0](#) [61011171-0-0](#) [62011432-0-0](#) [62022431-0-0](#) [62045481-0-E](#) [61011462-0-0](#) [62012421-0-D](#) [62012222-0-0](#) [62026421-0-B](#) [62042281-0-0](#) [61015481-0-0](#) [62055481-0-0](#) [62025421-0-E](#) [62022421-0-A](#) [62022281-0-0](#) [62016181-0-0](#) [61012161-E-0](#) [62045431-0-E](#) [61031422-0-0](#) [62011481-E-0](#) [62011121-0-0](#) [62021231-0-0](#) [62015471-E-E](#) [62012181-0-0](#) [62011221-0-0](#) [61015461-0-0](#) [61031281-E-0](#) [62031461-0-0](#) [61012481-E-0](#) [62011181-E-0](#) [62016481-0-0](#) [62031421-0-0](#) [62035461-0-0](#) [61031421-E-0](#) [62011421-0-E](#) [62016461-0-0](#) [61011431-0-0](#) [61011422-E-0](#) [62012221-0-A](#) [61032222-E-0](#) [62042481-0-0](#) [61016261-0-0](#) [61015481-E-0](#) [61012461-0-0](#) [61012431-0-0](#) [61031231-E-0](#) [62016431-0-0](#) [62015181-E-0](#) [62042421-E-A](#) [62015461-0-A](#) [62021471-0-0](#)