


Model PSxx  
 Slide Potentiometer  
 100,000 Cycle Life  
 Metal/Plastic Lever  
 RoHS Compliant

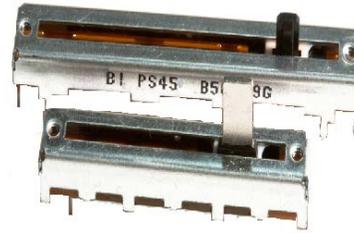

**MODEL STYLE**

Single Gang	PSxx-1
Dual Gang	PSxx-2

**ELECTRICAL<sup>1</sup>**

Resistance Range, Ohms	500 -1M
Standard Resistance Tolerance	± 20%
Resistance Tapers	A,B,C
Residual Resistance	Terminals 1 to 2:Less than 10 ohms Terminals 2 to 3:Less than 30 ohms
Input Voltage, Maximum	Linear B taper: 200 Vac    Other tapers: 150 Vac
Power rating, Watts (Single Unit / Dual Unit)	<b>Linear B taper:</b> 20mm: 0.1W / 0.05W, 30mm: 0.2W / 0.1W 45mm: 0.25W / 0.125W, 60mm:0.2W / 0.2W  <b>Other tapers:</b> 20mm: 0.05W / 0.025W, 30mm: 0.1W / 0.05W 45mm: 0.125W / 0.06W, 60mm:0.1W / 0.1W
Dielectric Strength	300Vac, 1 minute
Insulation Resistance, Minimum	100M ohms at 250Vdc/ 1 minute
Sliding Noise	Less than 100mV
Gang Error	±3dB (-40dB to 0dB)

**MECHANICAL**

Static Stop Strength, Minimum	5.0 Kgf/cm
Operating Force	10gf to 100gf
Detent Slip-out force	30gf to 200gf


**DURABILITY**

Sliding Life	100,000 cycles
--------------	----------------

<sup>1</sup> Specifications subject to change without notice.

## ORDERING INFORMATION<sup>2</sup>

### Model PSxx

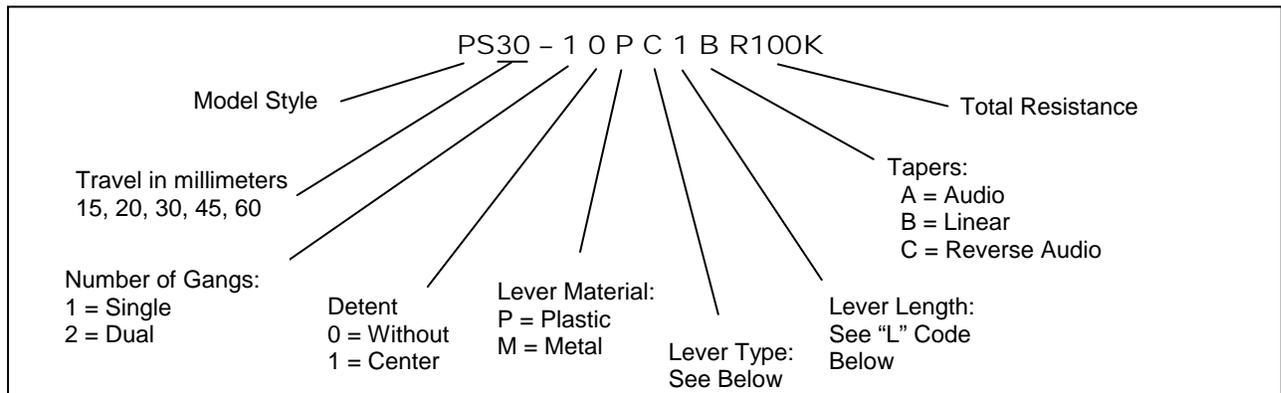

## STANDARD RESISTANCE VALUES, OHMS

500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1 MEG
-----	----	----	----	-----	-----	-----	------	------	------	-------

### Plastic Lever Types

D-Type		B -Type		C -Type					A -Type				
L	5	L	10	L	10	12.5	15	18	20	L	5	8	10
CODE	1	CODE	1	CODE	1	2	3	4	5	CODE	1	2	3


### Metal Lever Types

D-Type			B -Type			C -Type					A -Type				
L	15	20	25	L	6	7	10	L	10	15	17.3	20	25	L	10.4
F	10	10	10	CODE	1	2	3	F	7	10	10	10	10	CODE	1
CODE	1	2	3	CODE	1	2	3	CODE	1	2	3	4	5	CODE	1


<sup>2</sup> Contact our customer service for custom designs and features.

OUTLINE DRAWING

PSxx-1 Single Gang

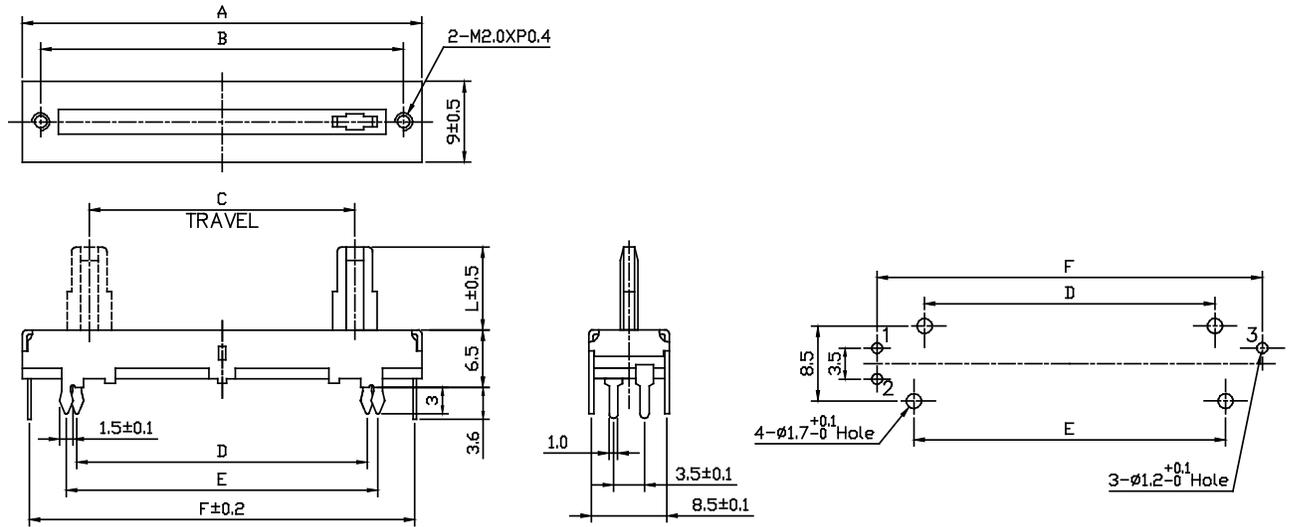

PSxx-2 Dual Gang

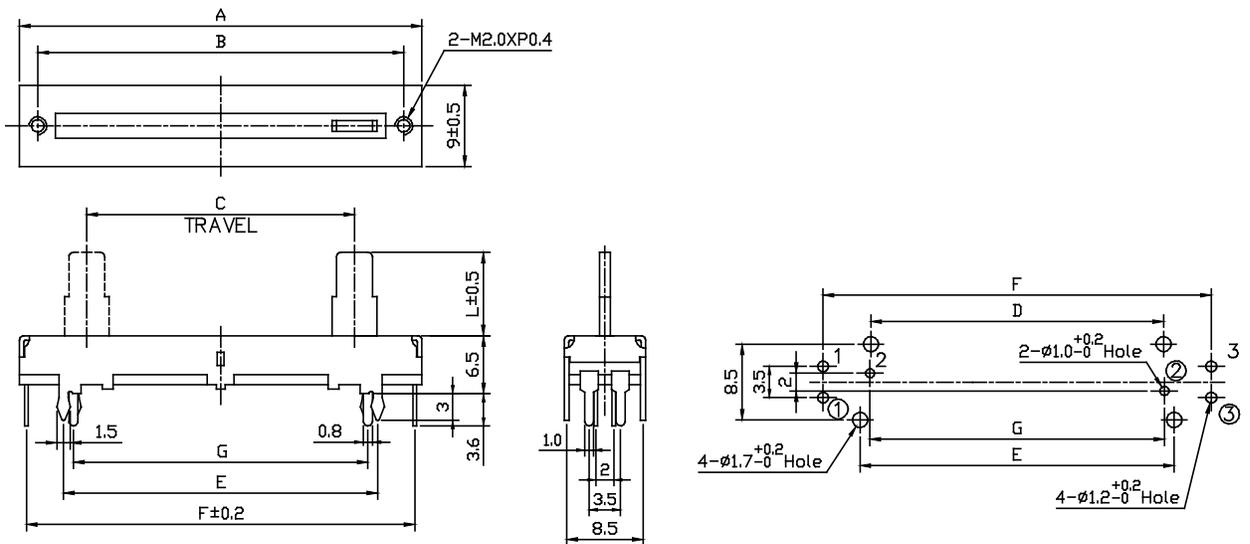


General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies Corporation  
 4200 Bonita Place, Fullerton, CA 92835 USA  
 T: +1 714 447 2345  
 www.ttelectronics.com


MODEL	A	B	C	D	E	F	G
PS15-1	30	26	15	17.8	20.2	28.8	---
PS15-2	30	26	15	17.8	20.2	28.8	18
PS20-1	35	31	20	22.8	25.2	33.8	---
PS20-2	35	31	20	22.8	25.2	33.8	23
PS30-1	45	41	30	32.8	35.2	43.8	---
PS30-2	45	41	30	32.8	35.2	43.8	33
PS45-1	60	56	45	47.8	50.2	58.8	---
PS45-2	60	56	45	47.8	50.2	58.8	48
PS60-1	75	71	60	62.8	65.2	73.8	---
PS60-2	75	71	60	62.8	65.2	73.8	63

**CIRCUIT DIAGRAM**

**PSxx-1 Single Gang**



**PSxx-2 Dual Gang**

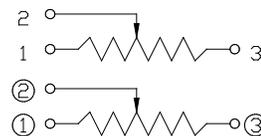

General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TT Electronics:

[PS15-10PC1AR10K](#) [PS45L-R02BR100K](#) [PS60M-0MC2BR100K](#) [PS15-11PC1AR10K](#) [PS45L-G02BR100K](#) [PS20M-0MC4FBR10K](#) [PS45L-N02BR100K](#) [PS20M-0PE1FBR20K](#) [PS30M-0PB1FBR100K](#) [PS45-10PD1BR10K](#) [PS45-21MC3BR10K](#) [PS45M-0MC2AR1K](#) [PS15-10PD1BR10K](#) [PS20-10PC1AR10K](#) [PS45L-G02AR100K](#) [PS15-10PC1BR5K](#) [PS30L-G11BR1K](#) [PS20-11PC1AR10K](#) [PS15-11PC1BR10K](#) [PS20-10PD1BR10K](#) [PS45L-N01FBR100KN](#) [PS60-10MC1BR5K](#) [PS20-11PC1BR10K](#) [PS20M-0MC2FBR20K](#) [PS45L-R02AR1MEG](#) [PS60M-0MC2FBR20K](#) [PS45-11PC3BR10K](#) [PS45L-N02BR10K](#) [PS45L-N02AR1MEG](#) [PS30L-R01BR1K](#) [PS30M-0PC1FBR10K](#) [PS45M-0MC2AR5K](#) [PS45L-G02BR1K](#) [PS45-10PB1BR50K](#) [PS30-10PC1BR100K](#) [PS30-10MC1BR100K](#) [PS30-10PB10BR10K](#) [PS45-21PC3BR10K](#) [PS30-10PC10BR10K](#) [PS45-10MC1BR100K](#) [PS45-10MC1BR10K](#) [PS60-10MC1BR10K](#) [PS60-20MA1BR1M](#) [PS45-20MA1BR500](#) [PS45-10MA1BR10K](#) [PS60-20MA1BR10K](#) [PS45-10MA1BR100K](#) [PS60-10MA1BR100K](#) [PS45-10MA1BR5K](#) [PS45-10MA1BR500](#) [PS45-10MA1BR50K](#) [PS60-10MA1BR5K](#) [PS60-10MA1BR1K](#) [PS45-10MA1BR1K](#) [PS15-10MB6BR10K](#) [PS15-10PA1BR10K](#) [PS15-10PC1AR100K](#) [PS15-11PC1BR100K](#) [PS15-11PD1BR10K](#) [PS20-10MC2BR10K](#) [PS20-10PC1A100K](#) [PS20-10PC1BR10K](#) [PS20-11MC15B10K](#) [PS20-11MC1B50K](#) [PS20-11MC2BR10K](#) [PS20-11PD1BR10K](#) [PS20-20MC2BR50K](#) [PS30-10MC1BR10K](#) [PS30-10MC4BR10K](#) [PS30-10PA1BR10K](#) [PS30-10PB10BR1K](#) [PS30-10PB1B1K](#) [PS30-10PC3BR10K](#) [PS30-11MA1BR10K](#) [PS30-11MD1BR10K](#) [PS30-20MC3AR200K](#) [PS30-20PA1AR100K](#) [PS30-20PB1AR10K](#) [PS30-20PB1BR10K](#) [PS30-21MB1BR100K](#) [PS45-10MA1BR1MEG](#) [PS45-10MC3BR100K](#) [PS45-10MD1BR10K](#) [PS45-10PB1B1K](#) [PS45-20MA1BR100K](#) [PS45-20MA1BR1K](#) [PS45-20MA1BR1MEG](#) [PS45-20MA1BR500K](#) [PS45-20MA1BR50K](#) [PS45-20MA1BR5K](#) [PS60-10MA1BR500](#) [PS60-10MC15A50K](#) [PS60-10MC3AR50K](#) [PS60-10MD1B5K](#) [PS60-20MA1BR100K](#) [PS60-20MA1BR500](#) [PS60-20MA1BR500K](#) [PS60-20MA1BR50K](#) [PS60-20MA1BR1K](#) [PS60-20MA1BR1MEG](#)