# **ESD Protection Diode**

# SC-74 Quad Monolithic Common Anode

This quad monolithic silicon voltage suppressor is designed for applications requiring transient overvoltage protection capability. It is intended for use in voltage and ESD sensitive equipment such as computers, printers, business machines, communication systems, medical equipment, and other applications. Its quad junction common anode design protects four separate lines using only one package. These devices are ideal for situations where board space is at a premium.

#### **Features**

- SC-74 Package Allows Four Separate Unidirectional Configurations
- Peak Power Min. 24 W @ 1.0 ms (Unidirectional), per Figure 5 Waveform
- Peak Power Min. 150 W @ 20 μs (Unidirectional), per Figure 6 Waveform
- Maximum Clamping Voltage @ Peak Pulse Current
- Low Leakage < 2.0 μA
- ESD Rating of Class 3B (exceeding 16 kV) per the Human Body Model
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant\*



## ON Semiconductor®

www.onsemi.com

# SC-74 QUAD SURGE PROTECTION 24 WATTS PEAK POWER 5.6 - 33 VOLTS



SC-74 CASE 318F STYLE 1

#### **PIN ASSIGNMENT**



- PIN 1. CATHODE
  - 2. ANODE
  - 3. CATHODE
  - 4. CATHODE
  - 5. ANODE6. CATHODE
- MARKING DIAGRAM



xxx = Specific Device Code

M = Date Cade ■ Pb-Free Package

(Note: Microdot may be in either location)

# DEVICE MARKING & ORDERING INFORMATION

See specific marking and ordering information in the device marking and ordering information table on page 6 of this data sheet.

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# THERMAL CHARACTERISTICS (T<sub>A</sub> = 25°C Unless Otherwise Noted)

Characteristic	Symbol	Value	Unit
Peak Power Dissipation @ 1.0 ms (Note 1) @ T <sub>A</sub> ≤ 25°C	P <sub>pk</sub>	24	W
Peak Power Dissipation @ 20 μs (Note 2) @ T <sub>A</sub> ≤ 25°C	P <sub>pk</sub>	150	W
Total Power Dissipation on FR-5 Board (Note 3) @ T <sub>A</sub> = 25°C	P <sub>D</sub>	225 1.8	MW mW/°C
Thermal Resistance from Junction-to-Ambient	$R_{ heta JA}$	556	°C/W
Total Power Dissipation on Alumina Substrate (Note 4)  @ T <sub>A</sub> = 25°C  Derate above 25°C	P <sub>D</sub>	300 2.4	MW mW/°C
Thermal Resistance from Junction-to-Ambient	$R_{ hetaJA}$	417	°C/W
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	TL	260	°C

- 1. Non-repetitive current pulse per Figure 5 and derate above  $T_A$  = 25°C per Figure 4. 2. Non-repetitive current pulse per Figure 6 and derate above  $T_A$  = 25°C per Figure 4.
- 3.  $FR-5 = 1.0 \times 0.75 \times 0.62$  in.
- 4. Alumina = 0.4 x 0.3 x 0.024 in., 99.5% alumina


## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C Unless Otherwise Noted) UNIDIRECTIONAL

(Circuit tied to pins 1, 2, and 5; Pins 2, 3, and 5; Pins 2, 4, and 5; or Pins 2, 5, and 6) ( $V_F = 0.9 \text{ V Max} \otimes I_F = 10 \text{ mA}$ )

	Е	Breakdowr	ı Volta	ge	Ma Reve Leak Curr	rse age		Max	Max Reverse Voltage @ I <sub>RSM</sub>	Maximum Temperature Coefficient of V <sub>Z</sub>	Capacitance @ 0 Volt Bias, 1 MHz	
		Vzт (Note 6) (V)		@ l <sub>ZT</sub>	I <sub>R</sub>	V <sub>R</sub>	Max Zener Impedance (Note 7)	Reverse Surge Current	(Note 8) (Clamping Voltage)		(p	F)
<b>Device</b> (Note 5)	Min	Nom	Max	(mA)	(nA)	(V)	$Z$ ZT @ $I$ ZT $(\Omega)$ $(mA)$	IRSM (A)	VRSM (V)	(mV/°C)	Min	Max
MMQA5V6T1G	5.32	5.6	5.88	1.0	2000	3.0	400	3.0	8.0	1.26	-	-
MMQA6V2T1G/T3G	5.89	6.2	6.51	1.0	700	4.0	300	2.66	9.0	10.6	-	-
MMQA6V8T1G	6.46	6.8	7.14	1.0	500	4.3	300	2.45	9.8	10.9	100	250
MMQA12VT1G	11.4	12	12.6	1.0	75	9.1	80	1.39	17.3	14	-	-
MMQA13VT1G	12.4	13	13.7	1.0	75	9.8	80	1.29	18.6	15	_	_
MMQA15VT1G	14.3	15	15.8	1.0	75	11	80	1.1	21.7	16	-	-
MMQA18VT1G	17.1	18	18.9	1.0	75	14	80	0.923	26	19	-	-
MMQA20VT1G/T3G	19	20	21	1.0	75	15	80	0.84	28.6	20.1	-	-
MMQA22VT1G	20.9	22	23.1	1.0	75	17	80	0.758	31.7	22	-	-
MMQA24VT1G	22.8	24	25.2	1.0	75	18	100	0.694	34.6	25	-	-
MMQA27VT1G	25.7	27	28.4	1.0	75	21	125	0.615	39	28	-	-
MMQA33VT1G	31.4	33	34.7	1.0	75	25	200	0.504	48.6	37	_	-

- 5. Includes SZ-prefix devices where applicable.
- 6.  $V_Z$  measured at pulse test current  $I_T$  at an ambient temperature of 25°C.
- 7. Z<sub>ZT</sub> is measured by dividing the AC voltage drop across the device by the AC current supplied. The specified limits are I<sub>Z(AC)</sub> = 0.1 I<sub>Z(DC)</sub>, with AC frequency = 1 kHz.
- 8. Surge current waveform per Figure 5 and derate per Figure 4.


# **TYPICAL CHARACTERISTICS**



10,000 1,000 1,000 +150°C +150°C +25°C 10 5.6 6.8 20 27 33 V<sub>Z</sub>, NOMINAL ZENER VOLTAGE (V)

Figure 1. Typical Capacitance

Figure 2. Typical Leakage Current



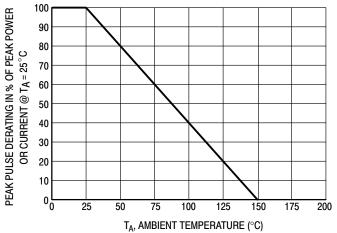


Figure 3. Steady State Power Derating Curve

Figure 4. Pulse Derating Curve

## **TYPICAL CHARACTERISTICS**




Figure 5. 10  $\times$  1000  $\mu s$  Pulse Waveform

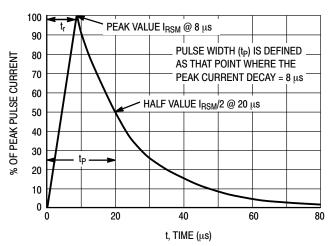


Figure 6.  $8 \times 20~\mu s$  Pulse Waveform

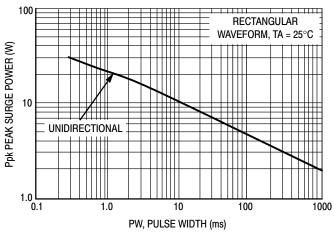


Figure 7. Maximum Non-Repetitive Surge Power, P<sub>pk</sub> versus PW

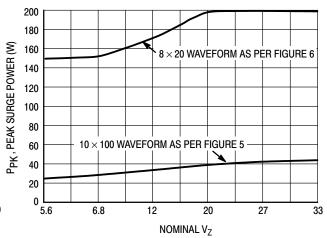


Figure 8. Typical Maximum Non-Repetitive Surge Power, P<sub>pk</sub> versus V<sub>Z</sub>

Power is defined as  $V_{RSM} \, x \, I_Z(pk)$  where  $V_{RSM}$  is the clamping voltage at  $I_Z(pk)$ .

# TYPICAL COMMON ANODE APPLICATIONS

A quad junction common anode design in a SC-74 package protects four separate lines using only one package. This adds flexibility and creativity to PCB design especially

when board space is at a premium. A simplified example of MMQA/SZMMQA Series Device applications is illustrated below.

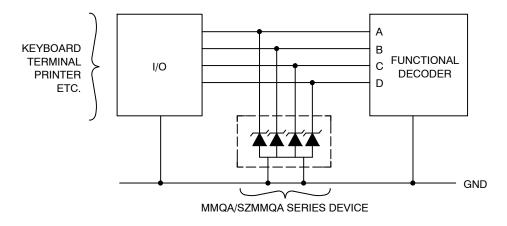
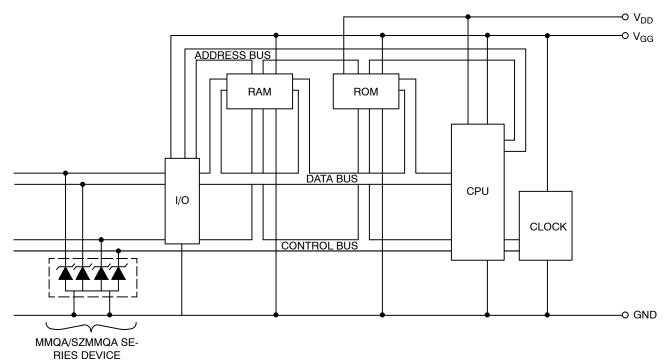


Figure 9. Computer Interface Protection



**Figure 10. Microprocessor Protection** 

# **DEVICE MARKING AND ORDERING INFORMATION**

Device*	Device Marking	Package	Shipping
MMQA5V6T1G	5A6	_	3,000/Tape & Reel
MMQA6V2T1G	6A2		3,000/Tape & Reel
MMQA6V2T3G	6A2		10,000/Tape & Reel
MMQA6V8T1G	6A8		3,000/Tape & Reel
MMQA12VT1G	12A		3,000/Tape & Reel
MMQA13VT1G	13A		3,000/Tape & Reel
MMQA15VT1G	15A		3,000/Tape & Reel
MMQA18VT1G	18A	SC-74 (Pb-Free)	3,000/Tape & Reel
MMQA20VT1G	20A		3,000/Tape & Reel
MMQA20VT3G	20A		10,000/Tape & Reel
MMQA22VT1G	22A		3,000/Tape & Reel
MMQA24VT1G	24A		3,000/Tape & Reel
MMQA27VT1G	27A	1	3,000/Tape & Reel
MMQA27VT3G	27A	1	10,000/Tape & Reel
MMQA33VT1G	33A		3,000/Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# **Mechanical Characteristics:**

**CASE:** Void-free, Transfer-molded, Thermosetting Plastic Case.

FINISH: Corrosion resistant finish, easily solderable.

Package designed for optimal automated board assembly.

Small package size for high density applications.

Available in 8 mm Tape and Reel.

Use the Device Number to order the 7 inch/3,000 unit reel.

Replace the "T1" with "T3" in the Device Number to order the 13 inch/10,000 unit reel.


<sup>\*</sup>IncludeS SZ-prefix devices where applicable.


# **MECHANICAL CASE OUTLINE**




SC-74 CASE 318F-05 **ISSUE N** 

**DATE 08 JUN 2012** 








#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH
- 2. CONTROLLING DIMENSION: INCH.
  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH
  THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
  4. 318F-01, -02, -03, -04 OBSOLETE. NEW STANDARD 318F-05.

	М	ILLIMETE	RS	INCHES			
DIM	MIN	NOM	MAX	MIN	NOM	MAX	
Α	0.90	1.00	1.10	0.035	0.039	0.043	
A1	0.01	0.06	0.10	0.001	0.002	0.004	
b	0.25	0.37	0.50	0.010	0.015	0.020	
С	0.10	0.18	0.26	0.004	0.007	0.010	
D	2.90	3.00	3.10	0.114	0.118	0.122	
E	1.30	1.50	1.70	0.051	0.059	0.067	
е	0.985	0.95	11.05	0.084	0.037	0.10241	
L	0.20	0.40	0.60	0.008	0.016	0.024	
HE	2.50	2.75	3.00	0.099	0.108	0.118	
θ		-			-		

# **SOLDERING FOOTPRINT\***

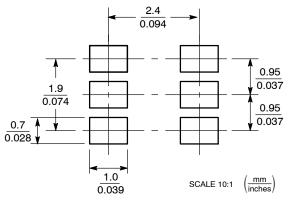

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

5. BASE 1 6. COLLECTOR 1

## **GENERIC MARKING DIAGRAM\***



XXX = Specific Device Code

M = Date Code

= Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

5. CATHODE

STYLE 2:	STYLE 3:	STYLE 4:	STYLE 5:	STYLE 6:
PIN 1. NO CONNECTION	PIN 1. EMITTER 1	PIN 1. COLLECTOR 2	PIN 1. CHANNEL 1	PIN 1. CATHODE
2. COLLECTOR	2. BASE 1	2. EMITTER 1/EMITTER 2	2. ANODE	<ol><li>ANODE</li></ol>
<ol><li>EMITTER</li></ol>	<ol><li>COLLECTOR 2</li></ol>	<ol><li>COLLECTOR 1</li></ol>	<ol><li>CHANNEL 2</li></ol>	<ol><li>CATHODE</li></ol>
<ol><li>NO CONNECTION</li></ol>	4. EMITTER 2	4. EMITTER 3	<ol><li>CHANNEL 3</li></ol>	<ol><li>CATHODE</li></ol>
<ol><li>COLLECTOR</li></ol>	5. BASE 2	<ol><li>BASE 1/BASE 2/COLLECTOR 3</li></ol>	<ol><li>CATHODE</li></ol>	<ol><li>CATHODE</li></ol>
6. BASE	<ol><li>COLLECTOR 1</li></ol>	6. BASE 3	<ol><li>CHANNEL 4</li></ol>	<ol><li>CATHODE</li></ol>
STYLE 8:	STYLE 9:	STYLE 10:	STYLE 11:	
PIN 1. EMITTER 1	PIN 1. EMITTER 2	PIN 1. ANODE/CATHODE	PIN 1. EMITTER	
2. BASE 2	2. BASE 2	2. BASE	2. BASE	
<ol><li>COLLECTOR 2</li></ol>	<ol><li>COLLECTOR 1</li></ol>	3. EMITTER	<ol><li>ANODE/CATHOD</li></ol>	Œ
4. EMITTER 2	4. EMITTER 1	4. COLLECTOR	4. ANODE	
	PIN 1. NO CONNECTION 2. COLLECTOR 3. EMITTER 4. NO CONNECTION 5. COLLECTOR 6. BASE  STYLE 8: PIN 1. EMITTER 1 2. BASE 2 3. COLLECTOR 2	PIN 1. NO CONNECTION 2. COLLECTOR 3. EMITTER 4. NO CONNECTION 5. COLLECTOR 6. BASE  STYLE 8: PIN 1. EMITTER 1 2. BASE 2 3. COLLECTOR 2 4. EMITTER 2 5. BASE 2 6. COLLECTOR 1  STYLE 9: PIN 1. EMITTER 2 2. BASE 2 3. COLLECTOR 2 3. COLLECTOR 1	PIN 1. NO CONNECTION	PIN 1. NO CONNECTION         PIN 1. EMITTER 1         PIN 1. COLLECTOR 2         PIN 1. CHANNEL 1           2. COLLECTOR         2. BASE 1         2. EMITTER 1/EMITTER 2         2. ANODE           3. EMITTER         3. COLLECTOR 2         3. COLLECTOR 1         3. CHANNEL 2           4. NO CONNECTION         4. EMITTER 2         4. EMITTER 3         4. CHANNEL 3           5. COLLECTOR         5. BASE 2         5. BASE 1/BASE 2/COLLECTOR 3         5. CATHODE           6. BASE         6. COLLECTOR 1         6. BASE 3         6. CHANNEL 4           STYLE 9:         STYLE 10:         STYLE 11:           PIN 1. EMITTER 1         PIN 1. EMITTER 2         PIN 1. ANODE/CATHODE         PIN 1. EMITTER 2           2. BASE 2         2. BASE 2         2. BASE 2         2. BASE 3           3. COLLECTOR 2         3. COLLECTOR 1         3. EMITTER 3         3. ANODE/CATHODE

5. BASE 1 6. COLLECTOR 2

DOCUMENT NUMBER:	98ASB42973B	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SC-74		PAGE 1 OF 1	

5. ANODE

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

5. GATE 2 6. DRAIN 1

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative