www.vishay.com

Vishay Semiconductors

## Small Signal Schottky Diode



DESIGN SUPPORT TOOLS click logo to get started



### FEATURES

- For general purpose applications
- This diode features low turn-on voltage and high breakdown voltage. This device is protected by a PN junction guard ring against excessive voltage, such as electrostatic discharges



- This diode is also available in a MiniMELF case with type designation LL41
- AEC-Q101 qualified
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

#### **MECHANICAL DATA**

Case: DO-35 (DO-204AH) Weight: approx. 125 mg Cathode Band Color: black Packaging Codes/Options: TR/10K per 13" reel (52 mm tape), 50K/box TAP/10K per ammopack (52 mm tape), 50K/box

PARTS TABLE				
PART	ORDERING CODE	CIRCUIT CONFIGURATION	TYPE MARKING	REMARKS
BAT41	BAT41-TR or BAT41-TAP	Single	BAT41	Tape and reel/ammopack

<b>ABSOLUTE MAXIMUM RATINGS</b> (T <sub>amb</sub> = 25 °C, unless otherwise specified)					
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT	
Repetitive peak reverse voltage		V <sub>RRM</sub>	100	V	
Forward continuous current <sup>(1)</sup>		I <sub>F</sub>	100	mA	
Repetitive peak forward current <sup>(1)</sup>	t <sub>p</sub> < 1 s, δ < 0.5	I <sub>FRM</sub>	350	mA	
Surge forward current (1)	t <sub>p</sub> = 10 ms	I <sub>FSM</sub>	750	mA	
Power dissipation <sup>(1)</sup>	T <sub>amb</sub> = 65 °C	P <sub>tot</sub>	200	mW	

#### Note

<sup>(1)</sup> Valid provided that electrodes are kept at ambient temperature

<b>THERMAL CHARACTERISTICS</b> (T <sub>amb</sub> = 25 °C, unless otherwise specified)					
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT	
Thermal resistance junction to ambient air	Valid provided that electrodes are kept at ambient temperature	R <sub>thJA</sub>	300	K/W	
Junction temperature		Т <sub>і</sub>	125	°C	
Ambient operating temperature range		T <sub>amb</sub>	-65 to +125	°C	
Storage temperature range		T <sub>stg</sub>	-65 to +150	°C	

ELECTRICAL CHARACTERISTICS (T <sub>amb</sub> = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Reverse breakdown voltage (1)	I <sub>R</sub> = 100 μA	V <sub>(BR)</sub>	100	110		V
Leakage current <sup>(1)</sup>	V <sub>R</sub> = 50 V, T <sub>j</sub> = 25 °C	I <sub>R</sub>			100	nA
Leakage current	V <sub>R</sub> = 50 V, T <sub>j</sub> = 100 °C	I <sub>R</sub>			20	μA
Forward voltage <sup>(1)</sup>	I <sub>F</sub> = 1 mA	V <sub>F</sub>		400	450	mV
Forward voltage	I <sub>F</sub> = 200 mA	V <sub>F</sub>			1000	mV
Diode capacitance	V <sub>R</sub> = 1 V, f = 1 MHz	CD		2		pF

Note


<sup>(1)</sup> Pulse test,  $t_p = 300 \ \mu s$ 

Rev. 1.8, 01-Jun-17 1 Document Number: 85659 For technical questions within your region: <u>DiodesAmericas@vishay.com</u>, <u>DiodesAsia@vishay.com</u>, <u>DiodesEurope@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>



## **Vishay Semiconductors**

### **TYPICAL CHARACTERISTICS** ( $T_{amb} = 25$ °C, unless otherwise specified)

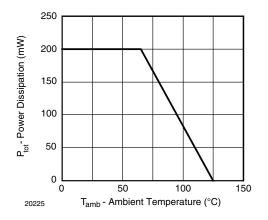



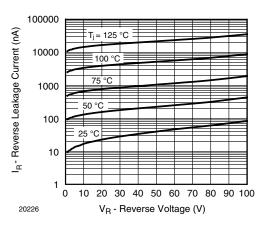


Fig. 2 - Typical Reverse Characteristics

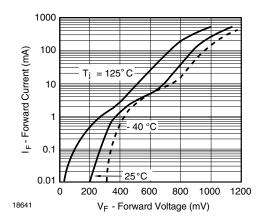


Fig. 3 - Typical Forward Characteristics


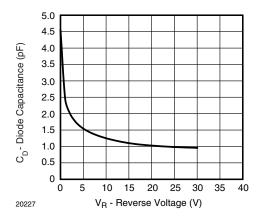


Fig. 4 - Typical Capacitance vs. Reverse Voltage



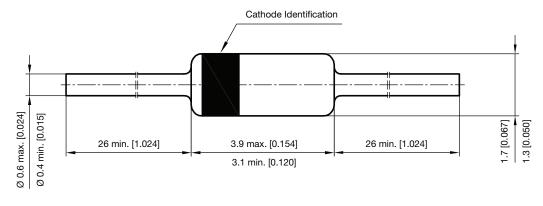

Rev. 6 - Date: 19. December 2011 Document no.: SB-V-3906.04-031(4) 94 9366

Rev. 1.8, 01-Jun-17

2

Document Number: 85659

For technical questions within your region: <u>DiodesAmericas@vishay.com</u>, <u>DiodesAsia@vishay.com</u>, <u>DiodesEurope@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>



Vishay

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay: BAT41-TAP BAT41-TR