

## Double Row Terminal Blocks

### Series TB200 & TB200HB

#### Specifications

**Description:** Double row terminal blocks.

#### Ratings:

Volts: — 300V\* (TB200)  
— 600V\* (TB200HB)

Amps: — 30A\*

**Center Spacing:** 0.437" or 7/16" (11.10mm)

**Wire Range:** #12 - 22 AWG Cu

**Screw Size:** #6-32 philslot screws

**Torque Rating:** 9 lb-in.

**Distance Between Barriers:** 0.353" (8.97mm)

**Mounting:** #6 screws

**Operating Temperature:** 130°C (266°F) max., -40°C (-40°F) min.

**Materials:** Molded base: Black, UL rated 94V0 thermoplastic

Terminal plating: Tin over brass; Screws: zinc-plated steel

**Breakdown Voltage:** 4800V

**Agency Information:** UL File E62622, CSA File 47235 & 15364; IEC Compliance; CE Certified

\* Max rating shown; some options may be rated lower - consult factory.

#### Dimensions - in

Poles	A	B	Poles	A	B	Poles	A	B
02	1.63	1.31	12	6.00	5.68	22	10.37	10.06
03	2.07	1.75	13	6.44	6.12	23	10.81	10.50
04	2.51	2.18	14	6.87	6.56	24	11.25	10.93
05	2.94	2.62	15	7.31	7.00	25	11.68	11.37
06	3.38	3.06	16	7.75	7.43	26	12.12	11.81
07	3.82	3.50	17	8.19	7.87	27	12.56	12.25
08	4.25	3.93	18	8.62	8.31	28	13.00	12.68
09	4.69	4.37	19	9.06	8.75	29	13.44	13.12
10	5.13	4.81	20	9.50	9.18	30	13.87	13.56
11	5.57	5.25	21	9.94	9.62			

1" = 25.4mm.




TB200-10SP




TB200HB-06

TB200 - in (mm)

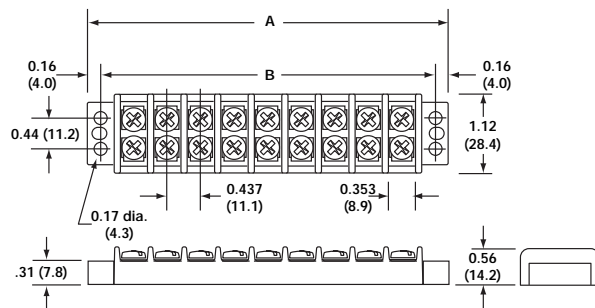

TB200HB

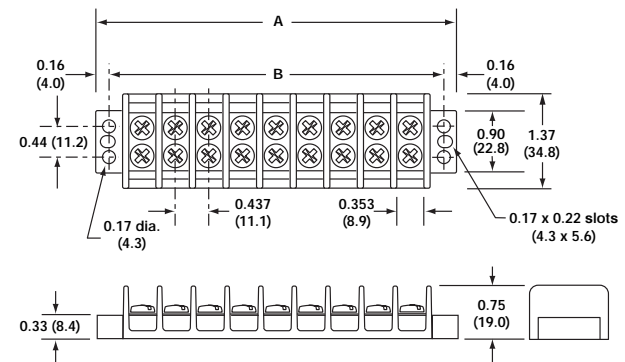


#### Catalog Number Build-A-Code

Series	Poles	Screw Options	Marking/Cover	Hardware Options
TB <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/>	02 to 30	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
200 = Standard 200HB = High barrier		Blank = Steel philslot, zinc-plated 00 = Screws shipped bulk B = Brass philslot, nickel-plated BS = Brass Sems philslot, nickel-plated SP = Steel Sems philslot, zinc-plated P = Steel Sems (P-style) ST = Stainless steel, philslot SS = Stainless steel Sems, philslot STR = Stainless steel, phillips (recess)	L1 to L6 Marking Strips (See page 318) Special Markings (See page 318) Covers (See page 318)	QC1 to QC20 = Quick connects J201 = Flat slip-on jumper (2 position only) 0J3 = Over barrier jumpers 0J5 = Over barrier jumpers 0J7 = Over barrier jumpers


## Double Row Terminal Blocks

### Screw Options

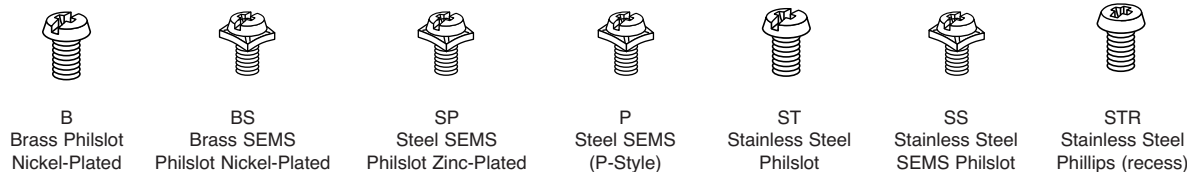


### Hardware Options


**Quick Connects – Assembled:** Terminals 0.25" x 0.031". Maximum current rating 20 amps. For other orientations, contact Cooper Bussmann.

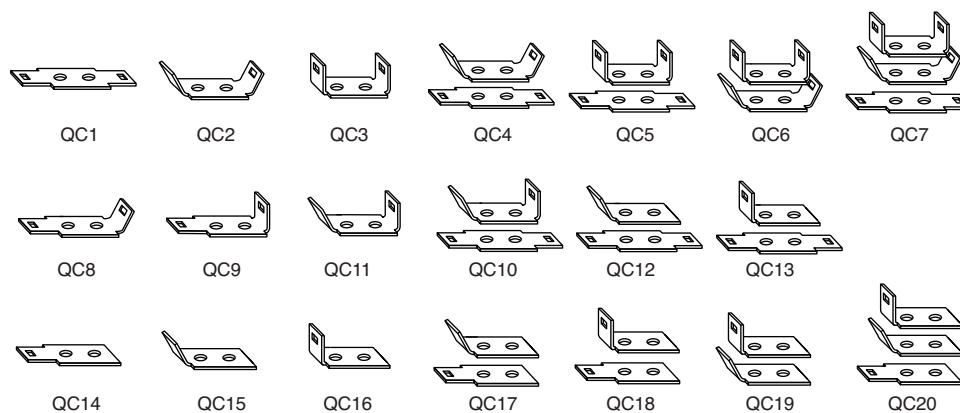

**Quick Connects – Bulk:** minimum order per part no. – 100 pieces.

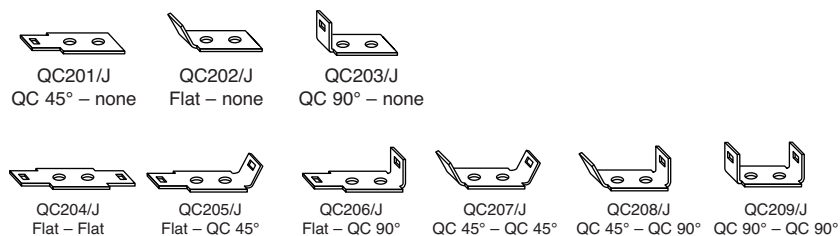

**Jumpers – Bulk:** minimum. order per part no. – 100 pieces. Contact Cooper Bussmann for jumper assembly.

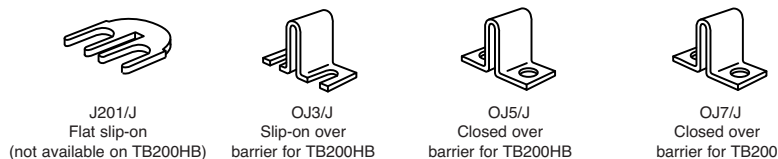

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Eaton:

[TB200-03](#) [TB200-08](#) [TB200-12](#) [TB200-05](#) [TB200-09](#) [TB200-07](#) [TB200-02B](#) [TB200-02SP](#) [TB200-03SP](#) [TB200-04B](#) [TB200-04QC15](#) [TB200-04QC4](#) [TB200-04SP](#) [TB200-05SP](#) [TB200-06B](#) [TB200-06SP](#) [TB200-07SP](#) [TB200-08B](#) [TB200-08QC2](#) [TB200-08SP](#) [TB200-09SP](#) [TB200-10B](#) [TB200-10P](#) [TB200-10SP](#) [TB200-12BS](#) [TB200-12SP](#) [TB200-13](#) [TB200-14](#) [TB200-14B](#) [TB200-14SP](#) [TB200-15](#) [TB200-15B](#) [TB200-15SP](#) [TB200-16](#) [TB200-16SP](#) [TB200-17](#) [TB200-18](#) [TB200-18P](#) [TB200-18SP](#) [TB200-20](#) [TB200-20B](#) [TB200-20SP](#) [TB200-21](#) [TB200-22](#) [TB200-24](#) [TB200-25](#) [TB200-26](#) [TB200-30](#) [TB200-30SP](#) [TB200HB-02](#) [TB200HB-02SP](#) [TB200HB-03](#) [TB200HB-03SP](#) [TB200HB-04](#) [TB200HB-04SP](#) [TB200HB-05](#) [TB200HB-06](#) [TB200HB-06SP](#) [TB200HB-07](#) [TB200HB-08](#) [TB200HB-08SP](#) [TB200HB-09](#) [TB200HB-09SP](#) [TB200HB-10](#) [TB200HB-10P](#) [TB200HB-10SP](#) [TB200HB-11](#) [TB200HB-12](#) [TB200HB-12SP](#) [TB200HB-14](#) [TB200HB-15](#) [TB200HB-16](#) [TB200HB-16SP](#) [TB200HB-18](#) [TB200HB-20](#) [TB200HB-20P](#) [TB200HB-20SP](#) [TB200HB-24](#) [TB200HB-26](#) [TB200HB-30](#) [TB200-04ST](#) [TB200-06ST](#) [TB200-02BQC7](#) [TB200-02QC4](#) [TB200-02QC7](#) [TB200-02SS](#) [TB200-03B](#) [TB200-03BL1](#) [TB200-03QC3J201](#) [TB200-03QC4](#) [TB200-03QC7](#) [TB200-03SPL1](#) [TB200-0400](#) [TB200-0400L1](#) [TB200-04BQC2](#) [TB200-04BS](#) [TB200-04QC2](#) [TB200-04QC3](#) [TB200-04SS](#) [TB200-05B](#)